

PS3X Switching Power Supplies

Universal AC input voltage
Output capacity 15W, 25W, 50W, 75W, 100W
Output voltage 5V, 12V, 24V



• BAUART
GEPRÜFT
• TYPE
APPROVED



PS3X-B
(15W)



PS3X-C
(25W)



PS3X-D
(50W)



PS3X-Q
(75W)



PS3X-E
(100W)

Universal AC input voltage

Many variations!

Universal
AC
Voltage

14
models

Output capacity:
15, 25, 50, 75, and 100W
Output voltage:
5, 12, and 24V
14 output types in total

Standard
Compact power
supply



2
Mounting Brackets
Direct or
DIN-rail mounting

International
standards compliant







UL/c-UL recognized,
CE, EMC, Class B

70% max.
size reduction *
Fits into compact area.

* Compared with conventional
power supplies.


(All dimensions in mm.)

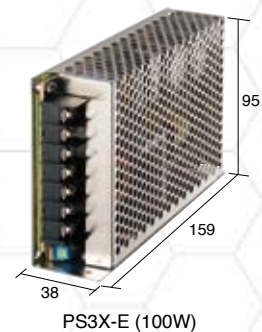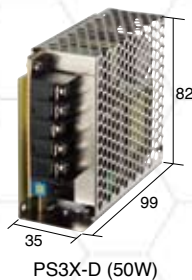

PS3X Series Switching Power Supplies

**Output 15W, 25W, 50W, 75W and 100W.
Compliant with international standards.**

- Universal AC input voltage.
- Five output types (15W, 25W, 50W, 75W, 100W) and three output voltage types (5V, 12V, 24V).
- EMC, EN55022 Class B compliant.
- Available with mounting brackets for direct or DIN rail mounting.

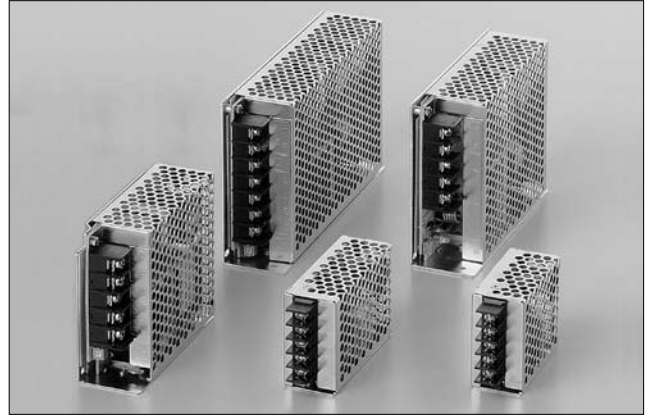

Standards	Mark	File No. or Organization
UL60950-1 CSA C22.2 No. 60950-1		UL/c-UL recognized File No. E141913
EN 60950-1		TÜV Rheinland
EN 55022 EN 55024 EN 60950-1		European Low Voltage Directives

Power Supplies

Output Capacity	Part No. (Ordering No.)	Input Voltage	Output Voltage	Output Current
15W	PS3X-B05AFC	100 to 240V AC	5V	3.0A
	PS3X-B12AFC		12V	1.3A
	PS3X-B24AFC		24V	0.63A
25W	PS3X-C05AFC		5V	5.0A
	PS3X-C12AFC		12V	2.1A
	PS3X-C24AFC		24V	1.1A
50W	PS3X-D12AFG		12V	4.2A
	PS3X-D24AFG		24V	2.2A
75W	PS3X-Q05AFG		5V	12.0A
	PS3X-Q12AFG		12V	6.0A
	PS3X-Q24AFG		24V	3.2A
100W	PS3X-E05AFG		5V	16.0A
	PS3X-E12AFG		12V	8.5A
	PS3X-E24AFG		24V	4.5A

- See page 6 for dimensions.

L-shaped Mounting Bracket (optional)

Applicable Power Supply	Part No. (Ordering No.)
PS3X-B	PS9Z-3N3A
PS3X-C	PS9Z-3N3B
PS3X-D	PS9Z-3E3B
PS3X-Q	PS9Z-3N3E
PS3X-E	

- See page 7 for dimensions.
- Package quantity: 1

DIN-rail Mounting Bracket (optional)

Applicable Power Supply	Part No. (Ordering No.)
PS3X-B	PS9Z-3N4B
PS3X-C	
PS3X-D	PS9Z-3E4C
PS3X-Q	PS9Z-3E4D
PS3X-E	

- Package quantity: 1

Din Rail

Length	Part No.	Ordering No.	Material	Weight (g)	Package Quantity
1000 mm	BAA1000	BAA1000PN10	Aluminum	200	10
	BAP1000	BAP1000PN10	Steel	320	

End Clip

Part No.	Ordering No.	Package Quantity
BNL5	BNL5PN10	10
BNL6	BNL6PN10	

Ordering Information

PS3X - B 05 AF C

Output Capacity

B: 15W
C: 25W
D: 50W
Q: 75W
E: 100W

Cover and Terminal Style

C: w/Standard cover,
Horizontal terminal block
G: w/Standard cover,
Vertical terminal block

Input Voltage

AF: 100 to 240V AC

Output Voltage

05: 5V DC (15W, 25W, 75W, 100W)
12: 12V DC
24: 24V DC

PS3X Switching Power Supplies

Specifications

Power Supplies		[15W]	[25W]	[50W]	[75W]	[100W]	
Description		PS3X-B05/B12/B24	PS3X-C05/C12/C24	PS3X-D12/D24	PS3X-Q05/Q12/Q24	PS3X-E05/E12/E24	
Input	Rated Input Voltage	100 to 240V AC					
	Voltage Range (Note 1)	85 to 264V AC / 120 to 375V DC	88 to 264V AC / 125 to 375V DC				
	Frequency	47 to 63 Hz					
	Input Current	0.5A max.	0.65A max.	1.3A max.	1.8A max.	2.5A max.	
	Inrush Current (Ta = -25°C, ACV cold start)	at 115V AC	40A max.	30A max.	30A max.	30A max.	35A max.
		at 230V AC	60A max.	50A max.	50A max.	50A max.	70A max.
	Leakage Current	0.5mA max.	1.5mA max.	1.5mA max.	1.5mA max.	1.5mA max.	
Efficiency (Typ.) (230V AC at input / rated output)	5V	77%	77%	—	77%	77%	
	12V	81%	81%	81%	82%	81%	
	24V	82%	84%	84%	84%	84%	
Output	Rated Voltage/Current	5V, 3A	5V, 5A	—	5V, 12A	5V, 16A	
		12V, 1.3A	12V, 2.1A	12V, 4.2A	12V, 6A	12V, 8.5A	
		24V, 0.63A	24V, 1.1A	24V, 2.2A	24V, 3.2A	24V, 4.5A	
	Adjustable Voltage Range	±10%					
	Output Holding Time (at rated I/O)	13 ms typ. (100V AC) 60 ms minimum (230V AC)	10 ms typ. (100V AC) 60 ms minimum (230V AC)	23 ms typ. (100V AC) 60 ms minimum (230V AC)	14 ms typ. (100V AC) 60 ms minimum (230V AC)	17 ms typ. (100V AC) 80 ms minimum (230V AC)	
	Start Time	1000 ms max. (230V AC input, rated output)					
	Rise Time	50 ms max. (230V AC input, rated output)	30 ms max. (230V AC input, rated output)	30 ms max. (230V AC input, rated output)	30 ms max. (230V AC input, rated output)	30 ms max. (230V AC input, rated output)	
	Regulation (including noise)	Input Fluctuation	0.5% max.				
		Overvoltage Fluctuation	5V: ±2% max. 12V, 24V: ±1% max.				
		Temperature Fluctuation	0.04% / °C max. (-20 to +50°C)		0.04% / °C max. (-10 to +45°C)		
		-20 to -10°C	5V: 200 mV max. 12V/24V: 200 mV max.	5V: 140 mV max. 12V: 240 mV max. 24V: 300 mV max.	—	—	—
			-10 to 0°C	5V: 160 mV max. 12V/24V: 200 mV max.	5V: 140 mV max. 12V: 240 mV max. 24V: 300 mV max.	12V: 240 mV max. 24V: 300 mV max.	5V: 140 mV max. 12V: 240 mV max. 24V: 300 mV max.
PS3X-B, C: 0 to +50°C PS3X-D, Q, E: 0 to +45°C	5V: 100 mV max. 12V/24V: 150 mV max.	5V: 70 mV max. 12V: 120 mV max. 24V: 150 mV max.	12V: 120 mV max. 24V: 150 mV max.	5V: 70 mV max. 12V: 120 mV max. 24V: 150 mV max.	5V: 100 mV max. 12V: 120 mV max. 24V: 150 mV max.		
Supplementary Functions	Overcurrent Protection	105% min. (auto reset) (Note 2)					
	Overvoltage Protection	Voltage limitation at 115% min.		Intermittent operation or output off at 115% min. (Note 3)			
	Operation Indicator	With (green LED)					
Dielectric Strength	Between input and output terminals	3000V AC, 1 minute					
	Between input and ground terminals	2000V AC, 1 minute					
	Between output and ground terminals	500V DC, 1 minute					
Insulation Resistance	100MΩ minimum, 500V DC megger (at 25°C, 70% RH) (between input and output terminals, between input and ground terminals)						
Operating Temperature	-20 to +70°C (no freezing, see output derating)		-10 to +70°C (no freezing, see output derating)				
Operating Humidity	20 to 85% RH (no condensation)						
Storage Temperature	-40 to +85°C (no freezing)						
Storage Humidity	10 to 95% RH (no condensation)						
Vibration Resistance	10 to 55 Hz, 20m/s ² constant, 2 hours each in 3 axes						
Shock Resistance	200m/s ² , 1 shock each in 6 axes						
EMC	EMI	EN55022 Class B					
	EMS	EN55024					
Safety Standards	IEC/EN60950-1, UL60950-1, CSA C22.2 No. 60950-1						
Dimensions (H × W × D) (mm)	50.8H × 28W × 62D	50.8H × 28.5W × 79D	82H × 35W × 99D	95H × 38W × 129D	95H × 38W × 159D		
Weight (approx.)	130g	180g	340g	500g	700g		
Terminal Screw	M3		M3.5				

Note 1: See "Output Current vs. Input Voltage" characteristics on page 5. Not subjected to safety standards. When using DC input, connect a fuse to the input terminal for DC input protection.



Note 2: Overload for 30 seconds or longer may damage the internal elements.

Note 3: One minute after the output has been turned off, turn on the AC input again.



Characteristics

Operating Temperature vs. Output Current (Derating Curves)

Conditions: Natural air cooling (operating temperature is the temperature around the power supply)

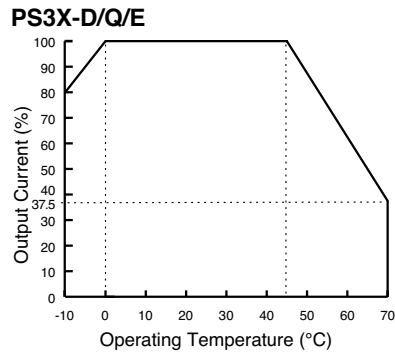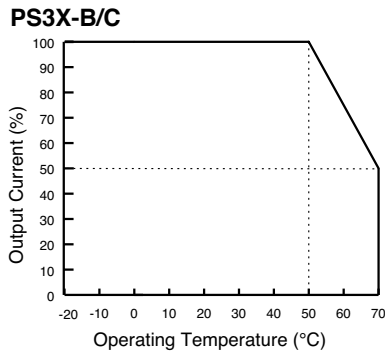


Output Current vs. Input Voltage (TA = 25°C)

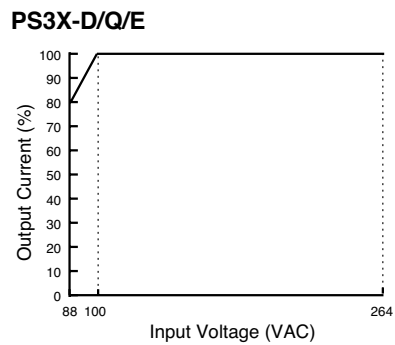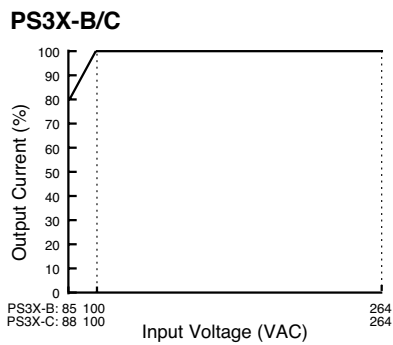


Operating Temperature by Safety Standards

Power Supplies	UL/EN60950-1
	Mounting A, B
PS3X-B05, -B12, -B24 PS3X-C05, -C12, -C24	50°C
PS3X-D12, -D24 PS3X-Q05, -Q12, -Q24 PS3X-E05, -E12, -E24	45°C

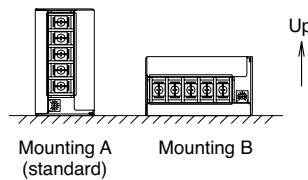

Note: Observe the derating curves when operating PS3X power supplies.


Overcurrent Protection Characteristics

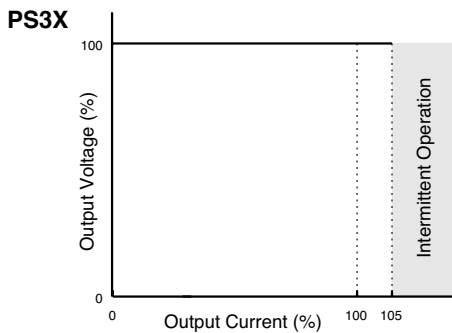


PS3X Switching Power Supplies

Dimensions


PS3X-B

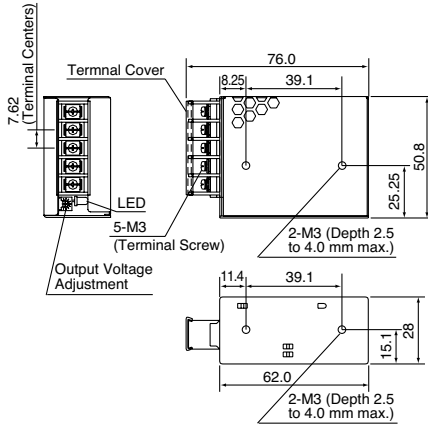


PS3X-C

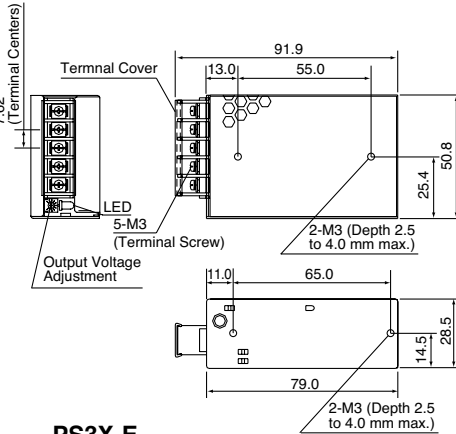


PS3X-D

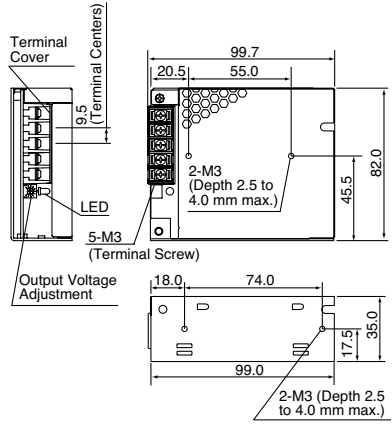

PS3X-Q

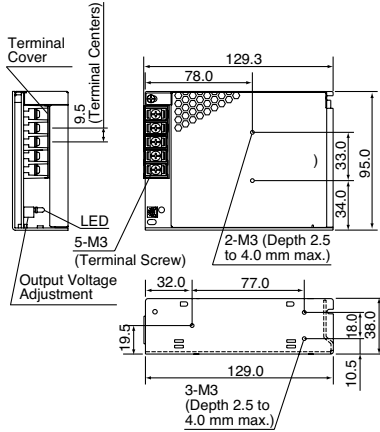

PS3X-E

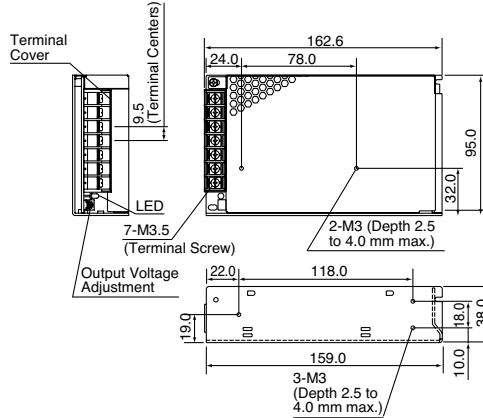


All dimensions in mm.


Parts Description

Pay attention to wiring, as terminal arrangement is different from that of other IDEC power supplies.


PS3X-B/C

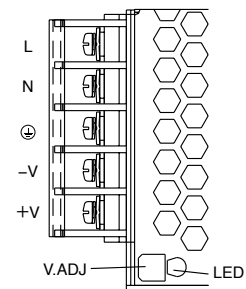


• PS3L-A/B (reference)

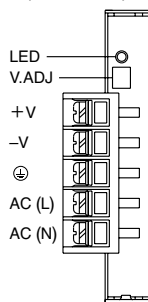


• PS3N-A/B/C (reference)

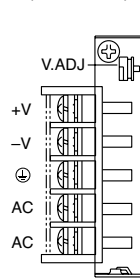


PS3X-D/Q

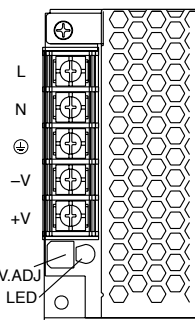


• PS3L-C/D (reference)

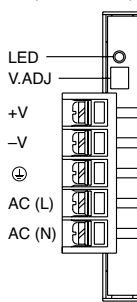


• PS3N-D (reference)

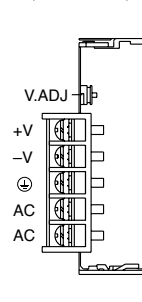


PS3X-E

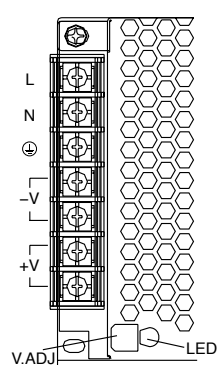

• PS3L-E (reference)

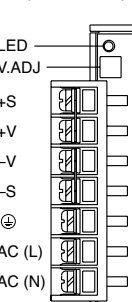

• PS3N-E (reference)

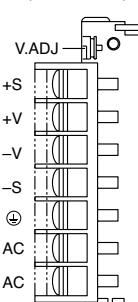


Marking	Name	Description
L, N	AC Input Terminal	Accepts a wide range of voltage and frequency. Polarity does not matter when using DC input.
⊕	Ground Terminal	Be sure to connect this terminal to a proper ground.
+V, -V	DC Output Terminals	Positive and negative output terminals
+S, -S (Note)	Remote Sensing Terminal	Compensates for voltage drops along the output line. Remove the jumpers when using remote sensing.
V.ADJ	Output Voltage Adjustment	Allows adjustment within $\pm 10\%$. Turning clockwise increases the output voltage.
LED	Power status	Illuminates (green) when input power is applied.


Note: PS3X does not have +S or -S terminals.

L-shaped Mounting Bracket


PS9Z-3N3A (for 15W)

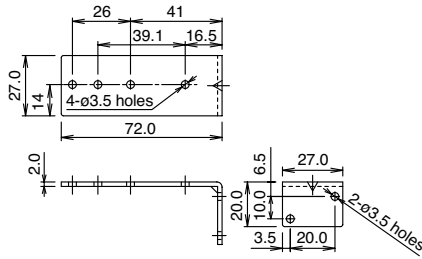


PS9Z-3N3B (for 25W)

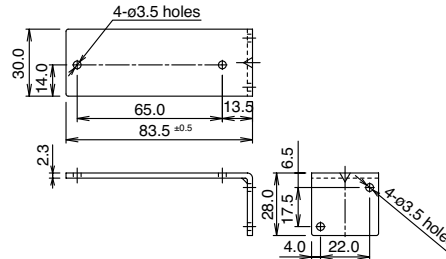


PS9Z-3E3B (for 50W)

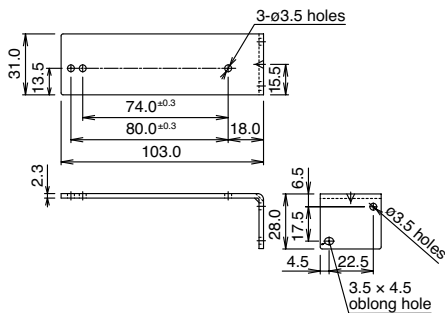

PS9Z-3N3E (for 75W/100W)

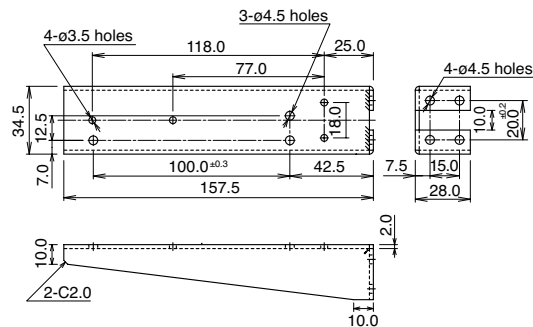

DIN-rail Mounting Bracket

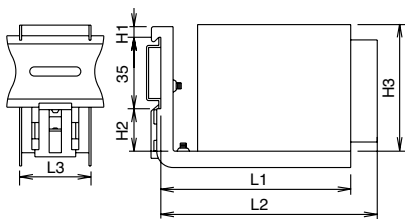

Part No.	Applicable Power Supply	L1	L2	L3	H1	H2	H3
PS9Z-3N4B	PS3X-B	95	105.5	35	5.2	20.5	50.8
	PS3X-C	95	113	35	5.2	20.5	50.8
PS9Z-3E4C	PS3X-D	136	117*	35	5.2	20.5	82
PS9Z-3E4D	PS3X-Q	188	141*	39.5	5.2	19.7	95
	PS3X-E	188	173*	39.5	5.2	19.7	95

* Note that L2 is shorter than L1.

Warranty

Scope

IDEC agrees to repair or replacement of the PS3X switching power supply if the product has been operated under the following conditions. The maximum value of output capacity shall be within the range of Operating Temperature vs. Output Current shown on page 5.

1. Average operating temperature (ambient temperature of switching power supply) is 40°C at maximum.
2. Average load factor is 80% at maximum.
3. Rated input voltage
4. Standard mounting style

PS3X Switching Power Supplies


Safety Precautions

- Do not use switching power supplies with equipment whose malfunction or inadvertent operation may damage the human body or life directly, such as medical, aerospace, railway, nuclear, etc.). PS3X switching power supplies are designed for the use in general electric equipment such as office, communication, measuring, and industrial electric devices.
- Do not disassemble, repair, or modify the power supplies, otherwise electric shock, fire, or malfunction will result.
- Do not install the switching power supply in places where it touches the human body while input voltage is applied. Do not touch the switching power supply while input voltage is applied and right after the power turned off, because high temperature and high voltage will cause burns and electric shocks. Standard switching power supply is for embedded use.
- Do not short the output terminals or output lead wires, otherwise fire or damage will result.
- Provide the final product with protection against malfunction or damage that may be caused by malfunction of the switching power supply. Damaged switching power supply may cause overvoltage on the output terminals, or may cause voltage drop.
- Turn off power before wiring. Also, make sure to wire correctly. Improper wiring may cause electric fire or damage.
- Do not use switching power supplies to charge rechargeable batteries.
- Make sure that the input voltage does not exceed the rating. Note polarity of input and output terminals and wire correctly. Incorrect wiring may cause blown fuse of AC line, smoke, or fire.
- Do not touch inside the switching power supply, and make sure that no foreign object enters inside the switching power supply, otherwise accidents or failure will occur.
- Observe the temperature derating curves. Operating temperature indicates the temperature around the lower part of the switching power supply. Failure to observe the derating curves will result in the internal temperature rise and failure of the switching power supply.
- The fuse inside the switching power supply is for AC input. When using with DC input, install an external fuse.
- Do not turn the V. ADJ control over the setting range, otherwise performance deterioration or failure will occur.
- When failure or error occurs, shut down the input to the switching power supply, and contact IDEC.
- Do not use or store the switching power supply in a place subject to extreme vibration or shocks, otherwise failure will result.
- Do not use the switching power supply where it is subject to or near:
 - * Direct sunlight, heater, or high temperatures.
 - * Metal powder, oil, chemicals, or hydrogen sulfide
 - * Highly humid areas, such as basement or conservatory
 - * Inside freezers or refrigerators, near cooler exhaust, or other cold places

Instructions

Notes for installation

1. When mounting the PS3X switching power supply, see the figure on the right.
2. See page 6 for the mounting hole layouts.
3. Use M3 screw as mounting screws. Choose screws that protrudes for 2.5 to 4mm from the surface of the switching power supply.
4. Do not close the openings of the switching power supply. Ensure proper heat dissipation by convection.
5. Maintain a minimum of 20 mm clearance around the switching power supply.
6. When derating of the output does not work, provide forced air-cooling.
7. Make sure to wire the ground terminal correctly.
8. For wiring, use wires with heat resistance of 60°C or higher. Use copper wire.
9. Recommended tightening torque of terminal screws: 0.8 N·m

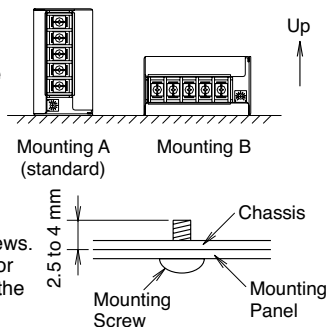

Overcurrent Protection

The output voltage drops automatically when an overcurrent flows, resulting in intermittent operation. Normal voltage is automatically restored when the load returns to normal conditions. However, overcurrent for a prolonged period of time or short-circuit causes the internal elements to deteriorate or break down.

Overvoltage Protection

(PS3X-B/C)
Voltage limit and auto-recovery method. The switching power supplies operate normally when voltage returns to normal.

(PS3X-D/Q/E)
The output is turned off when an overvoltage is applied. When the output voltage has dropped due to an overvoltage, turn the input off, and after one minute, turn the input on again.

Series Operation

When connecting two switching power supplies in series, insert a Schottky diode to each output.

Parallel Operation

Parallel operation is not possible.

Insulation/Dielectric Test

When performing an insulation/dielectric test, short the input (between AC) and output (between + and -). Do not apply or interrupt the voltage suddenly, otherwise surge voltage may be generated and the power supply may be damaged.

Adjustment of Output Voltage

The output voltage can be adjusted within $\pm 10\%$ of the rated output voltage by using the V.ADJ control. Turning the V.ADJ clockwise increases the output voltage. Turning counterclockwise decreases the output voltage. Note that overvoltage protection may work when increasing the output voltage.

Specifications and other descriptions in this catalog are subject to change without notice.



IDEC CORPORATION

7-31, Nishi-Miyahara 1-Chome, Yodogawa-ku, Osaka 532-8550, Japan
Tel: +81-6-6398-2571, Fax: +81-6-6392-9731
E-mail: marketing@idec.co.jp

IDEC CORPORATION (USA)
Tel: +1-408-747-0550 / (800) 262-IDECA (4332)
Fax: +1-408-744-9055 / (800) 635-6246
E-mail: opencontact@idec.com

IDEC CANADA LIMITED
Tel: +1-905-890-8561, Toll Free: (888) 317-4332
Fax: +1-905-890-8562
E-mail: sales@ca.idec.com

IDEC AUSTRALIA PTY. LTD.
Tel: +61-3-9763-3244, Toll Free: 1800-68-4332
Fax: +61-3-9763-3255
E-mail: sales@au.idec.com

IDEC ELECTRONICS LIMITED
Tel: +44-1256-321000, Fax: +44-1256-327755
E-mail: sales@uk.idec.com

IDEC ELEKTROTECHNIK GmbH
Tel: +49-40-25 30 54 - 0, Fax: +49-40-25 30 54 - 24
E-mail: service@idec.de

IDEC (SHANGHAI) CORPORATION
Tel: +86-21-5353-1000, Fax: +86-21-5353-1263
E-mail: idec@cn.idec.com

IDEC (BEIJING) CORPORATION
Tel: +86-10-6581-6131, Fax: +86-10-6581-5119

IDEC (SHENZHEN) CORPORATION
Tel: +86-755-8356-2977, Fax: +86-755-8356-2944

IDEC IZUMI (H.K.) CO., LTD.
Tel: +852-2803-8989, Fax: +852-2565-0171
E-mail: info@hk.idec.com

IDEC TAIWAN CORPORATION
Tel: +886-2-2698-3929, Fax: +886-2-2698-3931
E-mail: service@tw.idec.com

IDEC IZUMI ASIA PTE. LTD.
Tel: +65-6746-1155, Fax: +65-6844-5995
E-mail: info@sg.idec.com