

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------



The input of this universal level converter, direction decoder and potential isolation amplifier PW 1D-1D accepts as well single-track as double-track incremental encoder signals, which can be implemented as RS422 / TTL or as HTL level (10 ... 30 V). If the signal includes the direction of rotation, this direction can be defined either by a 90° phase shift of channels A and B or by a static direction signal.

The module can be easily and conveniently mounted in a cabinet on a standard DIN rail.

DC 5 ... 30 V Power supply	max. 500 kHz Input frequency	max. 500 kHz Output frequency	AC/DC Potential separation	DIN-rail mounting
---	---	--	--------------------------------------	--------------------------

Characteristics

- High frequency range up to 500 kHz.
- Potential isolation amplifier.
- Level converter and direction decoder for incremental encoder signals.
- Signal inputs (A, /A, B, /B, 0, /0) can be set to HTL, TTL or RS422 levels.
- Processes signals with direction, synchronous, asynchronous, as well as single-track signals.
- Signal outputs (A, /A, B, /B, 0, /0), can be set to HTL, TTL or RS422 levels.
- Conversion of an A/B direction information (90°) into a static direction signal and vice-versa.
- Encoder connection either with Sub-D connector or plug-in screw terminals.

Benefits

- Potential separation between sensor and control.
- Level adaptation for old controls with direction signal input.
- Conversion from TTL into HTL and vice versa.
- Voltage level adaptation to the application.

Order no.		
Level converter	8.PW.1D-1D	<i>Scope of delivery</i> - Level converter - Manual

Connection technology		Order no.
Cordset, pre-assembled	Sub-D female contacts, 9-pin, with cable outlet 70° single-ended 2 m [6.56'] PVC cable ¹⁾	8.0000.6V00.0002.0086
	Sub-D male contacts, 9-pin, with cable outlet 70° single-ended 2 m [6.56'] PVC cable ¹⁾	8.0000.6V00.0002.0082
Connector, self-assembly	Sub-D female contacts, 9-pin, with cable outlet 70°	8.0000.514B.0000
	Sub-D male contacts, 9-pin, with cable outlet 70°	8.0000.514A.0000

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.
You will find an overview of our systems and components for Functional Safety and the corresponding software in the safety technology section or under www.kuebler.com/safety.

1) Other lengths available.

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------

Technical data

Electrical characteristics	
Power supply	5 ... 30 V DC (residual ripple $\leq 10\%$ at 24 V DC)
Power consumption (no load)	max. 50 mA
Reverse polarity protection of the power supply	yes
Type of connection	screw terminal, 1.5 mm ²
Encoder supply (can only be supplied externally)	voltage can be supplied at the plug strip and picked off on the Sub-D 9-pin input connector

Mechanical characteristics		
Material	housing	plastic
Mounting	35 mm DIN rail (acc. to EN 60715)	
Dimensions (W x H x D)	22.5 x 102 x 102 mm [0.89 x 4.02 x 4.02"]	
Protection	IP20	
Weight	approx. 100 g [3.53 oz]	
Working temperature	0 °C ... +45 °C [+32 °F ... +113 °F] non condensing	
Storage temperature	-25 °C ... +70 °C [-13 °F ... +158 °F] non condensing	
Failure rate (MTBF in years)	71,8 a continuous operation at 60 °C [140 °F]	

Approvals		
CE compliant in accordance with	EMC Directive	2014/30/EU
	RoHS Directive	2011/65/EU
UKCA compliant in accordance with	EMC Regulations	S.I. 2016/1091
	RoHS Regulations	S.I. 2012/3032


Incremental input X1, X2		
Level (adjustable)	TTL / RS422 (differential voltage > 1 V) or HTL (10 ... 30 V)	
Tracks	TTL symmetrical HTL asymmetrical	A, /A, B, /B, 0, /0 A, B, 0
Frequency	TTL symmetrical HTL asymmetrical	max. 500 kHz max. 300 kHz (HTL)
Internal resistance	Ri \approx 10 kOhm	
Type of connection	screw terminals, 1.5 mm ² Sub-D male contacts, 9-pin	

Incremental output X3, X4		
Level	approx. 2 V lower than input voltage	
Tracks	A, /A, B, /B, 0, /0	
Output current	max. 30 mA (per channel)	
Output stage	Push-Pull	
Signal propagation time	approx. 600 ns	
Type of connection	screw terminals, 1.5 mm ² Sub-D female contacts, 9-pin	

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------

Terminal assignment

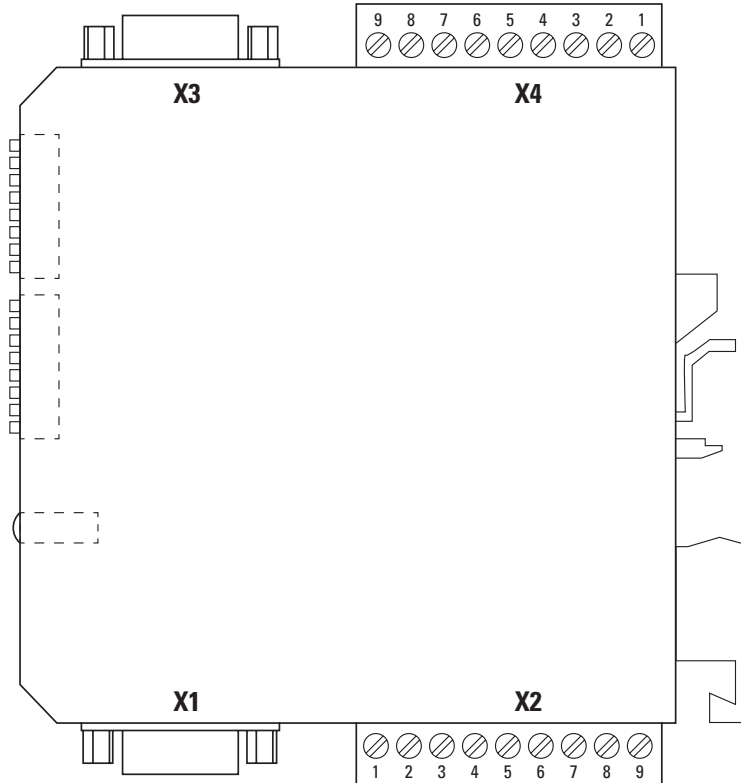

Interface	Function	Screw terminal, 9-pin									
Connection X2		Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\oplus
	Input TTL / RS422	Pin :	9	8	7	6	5	4	3	2	1
	Input HTL	Pin :	9	8	7	–	5	–	3	–	1

Interface	Function	Sub-D male contacts, 9-pin									
Connection X1		Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	–
	Input TTL / RS422	Pin :	5	4	3	2	1	9	7	6	8
	Input HTL	Pin :	5	4	3	–	1	–	7	–	8

Interface	Function	Screw terminal, 9-pin									
Connection X4		Signal:	GND	V_{in}	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\oplus
	Output TTL / RS422	Pin :	1	2	3	4	5	6	7	8	9
	Output HTL	Pin :	1	2	3	–	5	–	7	–	9

Interface	Function	Sub-D female contacts, 9-pin									
Connection X3		Signal:	GND	V_{in}	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	–
	Output TTL / RS422	Pin :	5	4	3	2	1	9	7	6	8
	Output HTL	Pin :	5	4	3	–	1	–	7	–	8

- +V : Power supply encoder
- 0 V : Encoder power supply ground GND1 (0 V)
- V_{in} : Power supply level converter
- GND : Level converter power supply ground (0V)
- A, \bar{A} : Incremental output channel A (Cosine)
- B, \bar{B} : Incremental output channel B (Sine)
- 0, $\bar{0}$: Reference signal

Signal converter

Level converter	PW 1D-1D	HTL, TTL, RS422
------------------------	-----------------	------------------------

Dimensions

Dimensions in mm [inch]

