


## TSS-5032

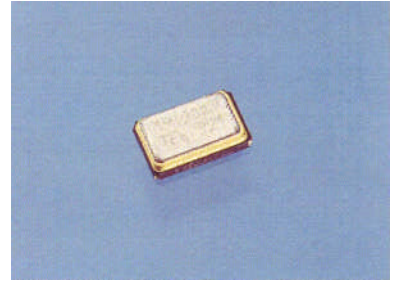

### Features

- Precise performance (tight tolerance and stability available)
- Excellent heat resistance and environmental characteristics.
- High mechanical shock resistance
- Suitable for reflow soldering
- Automatic mount by tape and reel
- Compactness and extremely thin (height: 0.90 mm max.)

### Specifications

TSS-5032	
Frequency	10-200 MHz
Load capacitance (CL)	5 pF - 20 pF, series
Frequency tolerance ( @25°C)	±10 ppm ... ±50 ppm
Frequency stability	± 5 ppm ... ±50 ppm
Operating temperature range	-35°C - +85°C
ESR	40 – 100 Ω max.
Dimension	5.0 x 3.2 x 0.9mm

- Please consult us for customized specifications.

### Dimension

#### <Dimension>

