


TM3838A

Feature

- Reflow solderable.
- Low impedance.
- Low profile and surface mountable MCF.
- This is achieved by using leadless type ceramic package.
- Automatic mount by tape and reel

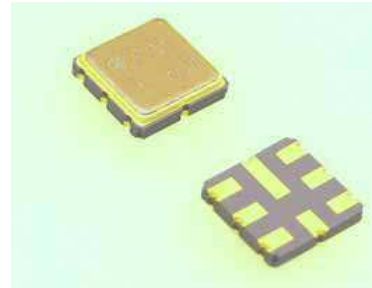

Specifications (example)

SIZE	3.8 X 3.8 X 0.9 MM
Nominal Frequency	152.400 MHz
No. of Pole	2
Pass Bandwidth	3.0 dB: ± 25.0 KHz min.
Pass-band Ripple	1.0 max. dB
Insertion Loss	4.0 max. dB
Stop Band Attenuation	± 60 kHz // 6 dB ± 200 kHz // 25 dB -900 kHz // 50 dB
Terminating Impedance	300 (Ω) // 1.3 (pF)
Group Delay ± 15 kHz	10 μ s
Operating Temperature range	(-30~+75°C)

Products with specific requirements are available upon request.

■Outline

