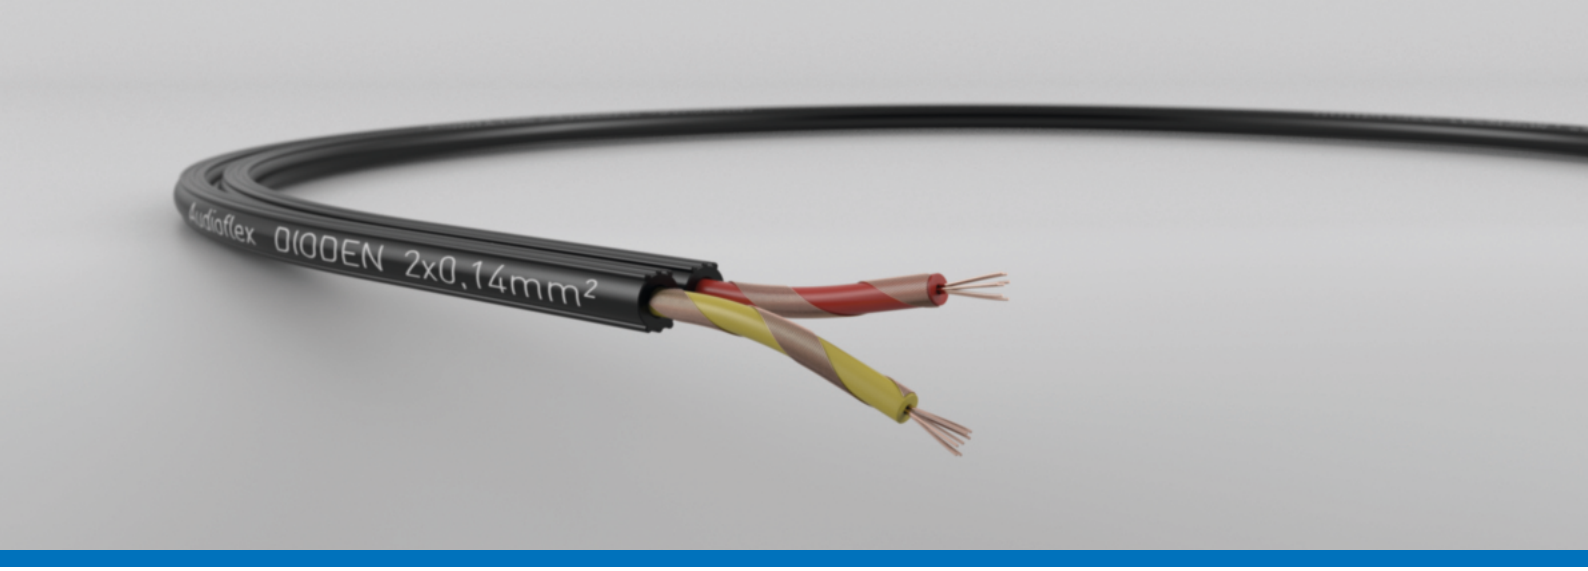

BlueSky Cinch
2 / 2Y - 2D - Y

Diode and cinch cables

APPLICATION

Audio / Vidio data cable in the Hifi range

CONSTRUCTION

Conductor	Stranded bare copper
Stranding	0,08 mm²: 10 x 0,10
	0,14 mm²: 18 x 0,10
	0,38 mm²: 19 x 0,16
Insulation	Polyethylen
Colours	ye, rd
Core shielding	Spiral screen with bare copper wires
Jacket	Special PVC
Jacket colour	black, RAL 9005

TECHNICAL DATA

Temperature range static	-30°C to +70°C
Temperature range operating	-10°C to +70°C

REMARKS

Also possible with other profile shapes
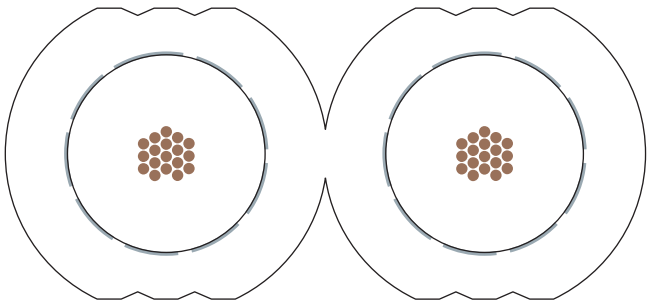
No of Cores + Cross Section mm²	**Copper Index** (kg/km)	**Weight** (appr. kg/km)	**Width / Outer Ø** ca. mm	**P/N**
2 x 0,08	9,9	24	2,60 / 5,60	04001095
2 x 0,14	11,6	25	2,60 / 5,60	04002183
2 x 0,38	26	57	4,00 / 8,00	04016084
4 x 0,14	23,5	59	3,00 / 12,60	05062004