

T-shank jig-saw blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8011 HSS steel

Standard saw blade, wavy set.

Application range: St 37 up to 4,0 mm thick, high-alloyed chromium steel such as stainless and acid resistant steel up to 3,0 mm thick, non-ferrous metals, aluminium 3,0 - 10,0 mm cooled with RUKO cutting spray. Hard plastics, acrylic glass 3,0 - 8,0 mm, Pertinax, Resitex. Asbestos cement 2,0 - 4,0 mm. Eternit up to 10,0 mm, cooled with water.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
77,0 x 7,9 x 1,0	2,0	13 Tpi	321 8011	323 8011

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 118 B	Metabo® 23 638
MP.S® 3113	Wilpu® MG 12
AEG® 254-064	



RUKO 8009 HSS steel

Standard saw blade, wavy set. Narrow blade suitable for profiled cuts.

Application range: St 37, sheet high-alloyed chromium steel such as stainless and acid resistant steel up to 2,0 mm thick, non-ferrous metals. Suitable for profiled cuts. Suitable for glass-fibre reinforced plastics up to 4,0 mm thick, acrylic glass up to 8,0 mm, cooled with water. Pressed materials, hard fabrics, insulation materials up 8,0 mm thick, cooled with water.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
77,0 x 7,1 x 1,0	1,2	21 Tpi	321 8009	323 8009

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 218 A	Metabo® 23 647
MP.S® 3112	Wilpu® MG 21
AEG® 254-063	



RUKO 8010 HSS steel

Standard saw blade, wavy set. Narrow blade suitable for profiled cuts.


Application range: St 37, non-ferrous metals, aluminium up to 4,0 mm thick, high-alloyed chromium steel such as stainless and acidresistant steel sheet up to 2,0 mm. Hard and softwood, insulation material up to 8,0 mm. Suitable for glassfibre reinforced plastics up to 2,0 mm, acrylic glass, pressed materials, hard fabrics, cooled with water.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
77,0 x 7,9 x 1,0	1,2	21 Tpi	321 8010	323 8010

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 118 A	Metabo® 23 637
MP.S® 3111	Wilpu® MG 11
AEG® 254-063	



RUKO 8012 HSS steel

Standard saw blade, wavy set. For thin sheet steel.

Application range:

Thin-gauged sheet and profiled section less than 1,0 mm. St 37, non-ferrous metals, aluminium up to 2,0 mm. Armoured plastics, acrylic glass, cooled with water. Thin-gauged hard fabrics, insulation materials, cooled with water.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
77,0 x 7,9 x 1,0	0,7	36 Tpi	321 8012	323 8012

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 118 G	Metabo® 23 636
MP.S® 3110	Wilpu® HG 107
AEG® 274-652	





T-shank jig-saw blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8013 HSS steel Standard saw blade, side set.			
Application range: Mild steel 3,0 - 6,0 mm, non-ferrous metals, aluminium and aluminium alloys 3,0 - 15,0 mm, cooled with RUKO cutting spray. Plastics, armoured plastics. Asbestos cement, eternit and hard materials.			
Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs.
	per mm	per inch	
100,0 x 7,9 x 1,0	3,0	8 Tpi	321 8013
			323 8013

Blades to replace
Competitive blades may vary from our specifications



Bosch® T 127 D	Metabo® 23 639
MP.S® 3118	Wilpu® K 14
AEG® 274-315	

RUKO 8017 HSS steel Standard saw blade, extra long, wavy set.			
Application range: Profiled section, mild steel, aluminium 2,0 - 10,0 mm, composite materials, sandwich materials up to 70,0 mm. Insulation materials.			
Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs.
	per mm	per inch	
132,0 x 7,9 x 1,3	2,0	13 Tpi	321 8017
			323 8017

Blades to replace
Competitive blades may vary from our specifications



Bosch® T 318 B	Metabo® —
MP.S® 3115	Wilpu® MG 32 bi
AEG® 274-653	

RUKO 8016 HSS steel Standard saw blade, extra long, wavy set.			
Application range: Profiled section, mild steel, aluminium 1,5 - 4,0 mm, composite materials, sandwich materials up to 70,0 mm. Insulation materials.			
Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs.
	per mm	per inch	
132,0 x 9,5 x 1,0	1,2	21 Tpi	321 8016
			323 8016

Blades to replace
Competitive blades may vary from our specifications



Bosch® T 318 A	Metabo® 23 629
MP.S® 3114	Wilpu® MG 31 bi
AEG® 274-654	

RUKO 8028 HSS bimetal Saw blade, wavy set.			
Application range: Mild steel, non-ferrous metals 3,0 - 10,0 mm thick as well as sheet high-alloyed chromium steel such as stainless and acidresistant steel, wood with nails, acrylic glass.			
Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs.
	per mm	per inch	
77,0 x 7,9 x 1,0	2,0	13 Tpi	321 8028
			323 8028

Blades to replace
Competitive blades may vary from our specifications

Bosch® T 118 BF	Metabo® 23 973
MP.S® 3113 F	Wilpu® MG 12 bi
AEG® 340-012	

T-shank jig-saw blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8033 HSS bimetal

Saw blade wavy set.

Application range:

Mild steel, non-ferrous metals, aluminium and aluminium alloys 1,5 - 4,0 mm thick, sheet high-alloyed chromium steel such as stainless and acid resistant steel.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
77,0 x 7,9 x 1,0	1,2	21 Tpi	321 8033	323 8033

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 118 AF	Metabo® 23 971
MP.S® 3111 F	Wilpu® MG 11 bi
AEG® 340-011	



RUKO 8020 HSS bimetal

Saw blade wavy set.

Application range:


Profiled section, pipe up to Ø 60,0 mm with wall thickness 3,0 - 10,0 mm, non-ferrous metals, high-alloyed chromium steel such as stainless and acid resistant steel. Wood with nails, acrylic glass, armoured plastics.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
132,0 x 7,9 x 1,0	2,0	13 Tpi	321 8020	323 8020

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 318 BF	Metabo® —
MP.S® —	Wilpu® K 14 bi
AEG® 274-653	



RUKO 8019 HSS bimetal

Saw blade wavy set.

Application range:


Profiled section, pipe up to Ø 60,0 mm with wall thickness 1,4 - 4,0 mm, high-alloyed chromium steel such as stainless and acid resistant steel.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
132,0 x 7,9 x 1,0	1,2	21 Tpi	321 8019	323 8019

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 318 AF	Metabo® —
MP.S® —	Wilpu® MG 31 bi
AEG® 274-654	



T-shank jig-saw blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.



RUKO 8021 HSS bimetal
Blade sharpened, teeth side set.

Application range:
Hardwood and softwood up to 60,0 mm, rough cut, high cutting performance (can take heavy cuts). Suitable for wood with nails.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 7,9 x 1,3	4,0	6 Tpi	321 8021	323 8021

Blades to replace
Competitive blades may vary from our specifications

Bosch® T 144 DF	Metabo® —
MP.S® —	Wilpu® HGS 14 bi
AEG® —	



RUKO 8005 HCS
Standard saw blade, wavy set.

Application range:
Plywood and wood-fibre board up to 30,0 mm thick. Insulating materials, acrylic glass up to 6,0 mm, cooled with water. Pressed material, hard fabric up to 4,0 mm thick, cardboard, linoleum up to 6,0 mm thick, cooled with water.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
77,0 x 7,9 x 1,0	2,0	13 Tpi	321 8005	323 8005

Blades to replace
Competitive blades may vary from our specifications

Bosch® T 119 B	Metabo® 23 631
MP.S® 3108	Wilpu® HW 12
AEG® 274-353	



RUKO 8007 HCS
Tapered blade, ground teeth.
Fast and rough cut. Narrow blade suitable for profiled cuts.

Application range:
Hardwood, softwood, plywood and wood-fibre boards up to 50,0 mm thick, clean cut, suitable for slots and grooves. Various soft plastics up to 30,0 mm, clean cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 7,9 x 1,45	4,0	6 Tpi	321 8007	323 8007

Blades to replace
Competitive blades may vary from our specifications

Bosch® T 101 D	Metabo® 23 635
MP.S® 3105	Wilpu® HGS 24
AEG® 274-351	



RUKO 8002 HCS
Tapered blade, ground teeth. Clean and fast cut.

Application range:
Hardwood, softwood, plywood and wood-fibre board up to 60,0 mm. Parallel cuts and clean cuts. Various soft plastics up to 25,0 mm thick, clean cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 7,9 x 1,7	4,0	6 Tpi	321 8002	323 8002

Blades to replace
Competitive blades may vary from our specifications

Bosch® T 101 DP	Metabo® 23 655
MP.S® 3103	Wilpu® HC 14 D
AEG® 274-351	

T-shank jig-saw blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8006 HCS

Blade sharpened and side set. Fast and rough cut.

Application range:


Hardwood and softwood up to 60,0 mm thick. Fast and rough cut.
Polystyrene, polyamide, soft plastics up to 50,0 mm thick and plexiglas up to 30,0 mm thick, cooled with water. Hard fabric, insulation material and cardboard.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 7,5 x 1,3	4,0	6 Tpi	321 8006	323 8006

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 144 D Metabo® 23 633
MP.S® 3104 Wilpu® HGS 14
AEG® 213-116



RUKO 8072 HCS

Blade side set and sharpened. Suitable for profiled cuts.

Application range:


Hardwoods and softwoods up to 60,0 mm thick, rough cut, especially suitable for profiled cuts.
Polystyrene, polyamide, soft plastics up to 50,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 6,4 x 1,3	4,0	6 Tpi	321 8072	323 8072

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 244 D Metabo® 23 649
MP.S® — Wilpu® —
AEG® 346-078



RUKO 8070 HCS

Saw blade side set. Rough cut with high cutting performance.

Application range:


Hardwoods and softwoods up to 60,0 mm thick, rough cut, high cutting performance (can take heavy cuts).
Polystyrene, polyamide, soft plastics up to 30,0 mm thick.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 7,9 x 1,3	3,0	8 Tpi	321 8070	323 8070

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 111 C Metabo® 23 632
MP.S® — Wilpu® HG 13
AEG® 254-071



RUKO 8001 HCS

Tapered blade, ground teeth. Clean and fast cut.

Application range:


Hardwood, softwood, plywood and wood-fibre board up to 50,0 mm thick.
Suitable for slots and grooves. Various soft plastics up to 20,0 mm thick.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 7,9 x 1,45	2,5	10 Tpi	321 8001	323 8001

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 101 B Metabo® 23 634
MP.S® 3101 Wilpu® HC 12
AEG® 254-061



T-shank jig-saw blades for power tools
by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8018 HCS

Tapered blade, ground teeth. Clean cut. Reversed cutting direction.

Application range:



Hardwoods and softwoods, plywood, wood-fibre boards up to 60,0 mm.
Formica and laminated / coated boards. Soft plastics.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
100,0 x 7,9 x 1,45	2,5	10 Tpi	321 8018	323 8018

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 101 BR Metabo® 23 650
MP.S® 3102 Wilpu® HC 12 R
AEG® 346-079



RUKO 8023 HCS

Tapered blade, ground teeth.

Application range:



Hardwood and softwood, plywood and wood-fibre boards up to 70,0 mm, clean cut,
suitable for slots and grooves. Various soft plastics up to 40,0 mm, clean cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
117,0 x 7,9 x 1,45	4,0	6 Tpi	321 8023	323 8023

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 301 D Metabo® 23 654
MP.S® 3101 L Wilpu® —
AEG® —



RUKO 8024 HCS

Tapered blade, ground teeth. Very clean and fast cut.

Application range:


Hardwood and softwood, plywood and wood-fibre boards up to 70,0 mm,
clean and fast cut, suitable for slots and grooves.
Various soft plastics up to 40,0 mm, clean cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5	Article no. Cont. pcs. 20
	per mm	per inch		
132,0 x 9,5 x 1,45	4,0	6 Tpi	321 8024	323 8024

Blades to replace

Competitive blades may vary from our specifications

Bosch® T 301 DL Metabo® —
MP.S® 3104 L Wilpu® HGS 34
AEG® —




1.11

Jig-saw blades for pneumatic body saws by Ober®, Chicago Pneumatic®, Shinano®, Facom® and Pneutec®

RUKO 8811 HSS bimetal. For thin steel sheet such as car body panels.

Application range: St 37, high-alloyed chromium steel such as stainless and acid resistant steel, non-ferrous metals up to 2,0 mm thick. Suitable for profiled cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
91,5 x 12,7 x 0,6	1,0	24 Tpi	321 8811



RUKO 8812 HSS bimetal. For thin steel sheet such as car body panels.

Application range: St 37, high-alloyed chromium steel such as stainless and acid resistant steel, non-ferrous metals up to 1,0 mm thick. Suitable for profiled cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
91,5 x 12,7 x 0,6	0,8	32 Tpi	321 8812




Jig-saw blades for pneumatic body saws by SIG®, FLEX® and Wieländer+Schill®

RUKO 8814 HSS bimetal. For thin steel sheet such as car body panels.

Application range:
St 37, non-ferrous metals up to 2,5 mm thick. Wood, plastics, hard fabrics.


Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
96,0 x 12,7 x 0,6	1,8	14 Tpi	321 8814

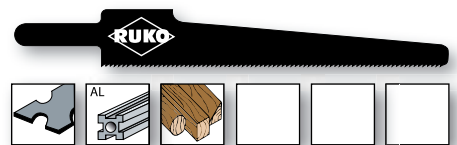

RUKO 8824 HSS bimetal. For thin steel sheet such as car body panels.

Application range: St 37, high-alloyed chromium steel such as stainless and acid resistant steel, non-ferrous metals up to 2,0 mm thick. Suitable for profiled cuts.


Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
96,0 x 12,7 x 0,6	1,0	24 Tpi	321 8824



RUKO 8832 HSS bimetal. For thin steel sheet such as car body panels.

Application range: St 37, high-alloyed chromium steel such as stainless and acid resistant steel, non-ferrous metals up to 1,0 mm thick. Suitable for profiled cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
96,0 x 12,7 x 0,6	0,8	32 Tpi	321 8832



Reciprocating blades for power tools
by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.



RUKO 8939 TC (Tungsten carbide)
Toothing ground.

Application range:
Inox sheeting from 2,0 - 4,0 mm material thickness,
Inox profiles from Ø 2,0 - 50,0 mm, FRP / epoxy from 2,0 - 15,0 mm.
For material with reduced stroke rate and cooling, work without oscillation.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
115,0 x 18,0 x 1,25	1,4	18 Tpi	331 89395

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 518 EHM	Metabo® —
MP.S® —	Wilpu® —
AEG® —	



RUKO 8915 HSS bimetal
Toothing crossed and milled.

Application range:
Thick sheeting from 3,0 - 8,0 mm material thickness,
solid pipes and profiles Ø 10,0 - 100,0 mm, fast cutting.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 18,0 x 0,9	1,8	14 Tpi	331 89155

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 922 BF	Metabo® 31130
MP.S® 4411	Wilpu® 3013-150
AEG® 323-810	



RUKO 8940 HSS bimetal
Toothing crossed and milled.

Application range:
Thick sheeting from 3,0 - 8,0 mm material thickness,
solid pipes and profiles Ø 10,0 - 100,0 mm, fast cutting.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 18,0 x 0,9	1,8 - 3,0	8 - 14 Tpi	331 89405

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 123 XF	Metabo® —
MP.S® —	Wilpu® —
AEG® —	



RUKO 8908 HSS bimetal
Toothing crossed and milled.

Application range:
Thin sheeting from 1,5 - 4,0 mm material thickness,
pipes and profiles Ø 5,0 - 100,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 18,0 x 0,9	1,4	18 Tpi	331 89085

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 922 EF	Metabo® 31132
MP.S® 4401	Wilpu® 3014-150
AEG® 323-809	

Reciprocating blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8906 HSS bimetal
Toothing corrugated and milled.

Application range:
Thin sheeting from 0,7 - 3,0 mm material thickness,
fine pipes and profiles from Ø 5,0 - 10,0 mm.
Easy, fine cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 18,0 x 0,9	1,0	24 Tpi	331 89065

Blades to replace
Competitive blades may vary from
our specifications

Bosch® S 922 AF Metabo® 31129
MP.S® 4405 Wilpu® 3015-150
AEG® 318-128




RUKO 8918 HSS bimetal
Toothing crossed and milled.

Application range:
Medium to thick sheeting from 2,0 - 12,0 mm material thickness,
solid pipes and profiles from Ø 10,0 - 150,0 mm.
Easy, fine cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
200,0 x 18,0 x 1,25	1,8 - 2,4	10 - 14 Tpi	331 89185

Blades to replace
Competitive blades may vary from
our specifications

Bosch® S 1025 VF Metabo® —
MP.S® — Wilpu® —
AEG® —




RUKO 8916 HSS bimetal
Toothing crossed and milled.

Application range:
Thin sheeting from 3,0 - 8,0 mm material thickness,
solid pipes and profiles from Ø 10,0 - 175,0 mm.
Flexible, flush and fast cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 18,0 x 0,9	1,8	14 Tpi	331 89165

Blades to replace
Competitive blades may vary from
our specifications

Bosch® S 1122 BF Metabo® 31135 /
MP.S® 4415 31485
AEG® — Wilpu® 3013-200




RUKO 8913 HSS bimetal
Toothing crossed and milled.

Application range:
Thin sheeting from 1,5 - 4,0 mm material thickness,
pipes and profiles Ø 5,0 - 175,0 mm.
Flexible, flush cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 18,0 x 0,9	1,4	18 Tpi	331 89135

Blades to replace
Competitive blades may vary from
our specifications

Bosch® S 1122 EF Metabo® 31133 /
MP.S® 4402 31483
AEG® 323-812 Wilpu® 3014-200



Reciprocating blades demolition for power tools
by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.




RUKO 8985 HSS bimetal
Toothing crossed and milled.

Application range:
Wood with nails, metal, chipboard from 10,0 - 100,0 mm material thickness, plastic profiles from Ø 5,0 - 100,0 mm, solid plastics / FRP from 8,0 - 50,0 mm, wood and metal window frames. Especially suitable for plunge cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 21,0 x 1,6	4,2	6 Tpi	331 89855

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 610 DF	Metabo® —
MP.S® —	Wilpu® —
AEG® —	




RUKO 8986 HSS bimetal
Toothing crossed and milled.

Application range:
Plates from 4,0 - 10,0 mm, solid pipes and profiles from Ø 20,0 - 100,0 mm. Ideal for pipe cutting equipment, rescue and demolition work. Powerful, coarse cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 21,0 x 1,6	2,9	8 - 10 Tpi	331 89865

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 920 CF	Metabo® —
MP.S® —	Wilpu® —
AEG® —	




RUKO 8988 HSS bimetal
Toothing crossed and milled.

Application range:
Wood with nails, metal, chipboard from 10,0 - 175,0 mm material thickness, solid plastics / FRP from 8,0 - 50,0 mm, wood and metal wall pieces to 150,0 mm. For rescue and demolition work.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 21,0 x 1,6	4,2	6 Tpi	331 89885

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 1110 DF	Metabo® —
MP.S® —	Wilpu® —
AEG® —	




RUKO 8989 HSS bimetal
Toothing crossed and milled.

Application range:
Plates from 4,0 - 10,0 mm, solid pipes and profiles from Ø 20,0 - 175,0 mm. Ideal for pipe cutting equipment, rescue and demolition work. Powerful, coarse cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 21,0 x 1,6	2,9	8 - 10 Tpi	331 89895

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 1120 CF	Metabo® —
MP.S® —	Wilpu® —
AEG® —	

1.11

Reciprocating blades for power tools
by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.


RUKO 8936 HSS bimetal
Toothing crossed and milled.

Application range:
Wood with nails and metal, chipboard from 10,0 - 175,0 mm material thickness, plastic profiles from Ø 5,0 - 175,0 mm, solid plastics / FRP from 8,0 - 50,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 18,0 x 1,25	4,2	6 Tpi	331 89365

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 1111 DF	Metabo® —
MP.S® —	Wilpu® —
AEG® 318-125	




RUKO 8945 HSS bimetal
Toothing crossed and milled.

Application range:
Wood with nails and metal from 5,0 - 175,0 mm material thickness, metal sheeting, pipes, aluminium profiles from 3,0 - 12,0 mm and for pallet repairs. Flexible, flush cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 18,0 x 0,9	2,5	10 Tpi	331 89455

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 1122 HF	Metabo® —
MP.S® —	Wilpu® —
AEG® —	

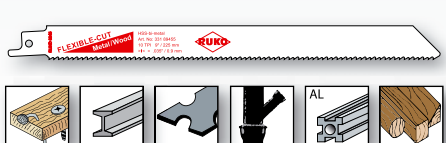


RUKO 8933 HSS bimetal
Toothing crossed and milled.

Application range:
Wood with nails and metal from 5,0 - 175,0 mm material thickness, metal sheeting, aluminium profiles from 3,0 - 10,0 mm and plastic profiles from Ø 3,0 - 175,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 18,0 x 1,25	1,8 - 2,4	10 - 14 Tpi	331 89335

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 1125 VF	Metabo® —
MP.S® —	Wilpu® —
AEG® 323-813	




RUKO 8928 HSS bimetal
Toothing crossed and milled.

Application range:
Wood with nails and metal from 5,0 - 175,0 mm material thickness, metal sheeting, aluminium profiles from 3,0 - 10,0 mm and plastic profiles from Ø 3,0 - 175,0 mm. Flexible, flush cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 18,0 x 0,9	1,8 - 2,4	10 - 14 Tpi	331 89285

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 1122 VF	Metabo® —
MP.S® —	Wilpu® —
AEG® 323-813	



1.11

Reciprocating blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8937 HSS bimetal
Toothing crossed and milled.

Application range:



Wood with nails, metal and chipboard from 10,0 - 250,0 mm material thickness, gas concrete from 10,0 - 250,0 mm, plastics / FRP and profiles from 5,0 - 60,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
300,0 x 18,0 x 1,25	4,2	6 Tpi	331 89375

Blades to replace

Competitive blades may vary from our specifications

Bosch® S 1411 DF Metabo® —
MP.S® — Wilpu® 3021-300 bi
AEG® —



RUKO 8910 HSS bimetal

Toothing crossed and milled.

Application range:

Wood with nails and metal from 5,0 - 250,0 mm material thickness, metal sheeting, aluminium profiles from 3,0 - 10,0 mm and plastic profiles from Ø 3,0 - 250,0 mm. Flexible, flush cut.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
300,0 x 18,0 x 0,9	1,8 - 2,4	10 - 14 Tpi	331 89105

Blades to replace

Competitive blades may vary from our specifications

Bosch® S 1222 VF Metabo® 31125 /
MP.S® 4432 31475
AEG® 323-813 Wilpu® 3018-280



RUKO 8929 HSS bimetal

Toothing crossed and milled.

Application range:



Wood with nails and metal from 5,0 - 250,0 mm material thickness, metal sheeting, aluminium profiles from 3,0 - 10,0 mm and plastic profiles from Ø 3,0 - 250,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
300,0 x 18,0 x 1,25	1,8 - 2,4	10 - 14 Tpi	331 89295

Blades to replace

Competitive blades may vary from our specifications

Bosch® S 1225 VF Metabo® 31124 /
MP.S® 4422 31474
AEG® — Wilpu® —



Reciprocating blades for power tools
by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.


RUKO 8905 HCS
Toothing crossed and milled.

Application range:
Coarse and nail-free wood from 20,0 - 100,0 mm, living wood, prune to Ø 100,0 mm. Especially suitable for curved cuts and plunge cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 18,0 x 1,25	8,5	3 Tpi	331 89055

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 617 K	Metabo® —
MP.S® 4021	Wilpu® 3019-150
AEG® —	

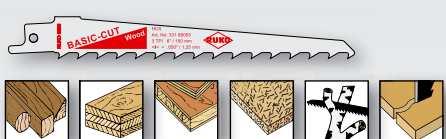


RUKO 8903 HCS
Toothing crossed.

Application range:
Specifically for various plaster and Rigips panels from 8,0 - 100,0 mm. Wood, Eternit and plastics.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 18,0 x 0,9	4,2	6 Tpi	331 89035

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 828 D	Metabo® 31136
MP.S® 4014	Wilpu® 3025-150
AEG® 318-131 / 323-801	

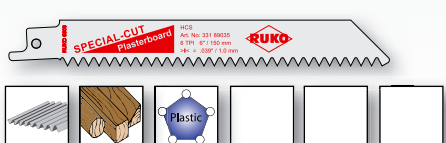


RUKO 8924 HCS
Toothing crossed and ground.

Application range:
Structural wood, plywood and plastics from 6,0 - 100,0 mm, wooden wall to 75,0 mm, chipboard and MDF from 6,0 - 60,0 mm. Especially suitable for plunge cuts.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
150,0 x 18,0 x 1,25	4,2	6 Tpi	331 89245

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 644 D	Metabo® 31120 / 31470
MP.S® 4011	Wilpu® 3021-150
AEG® 323-800	

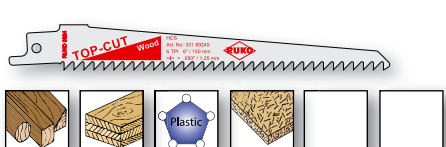


RUKO 8944 HCS
Toothing crossed and ground.

Application range:
Structural wood, plywood and plastics from 6,0 - 150,0 mm, wooden walls up to 175,0 mm, Chipboard and MDF from 6,0 - 60,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
200,0 x 18,0 x 1,25	2,5 - 4,3	6 - 10 Tpi	331 89445

Blades to replace
Competitive blades may vary from our specifications

Bosch® S 2345 X	Metabo® —
MP.S® —	Wilpu® —
AEG® —	



Reciprocating blades for power tools by Bosch®, Metabo®, MP.S®, Wilpu®, Atlas Copco® / AEG® etc.

RUKO 8923 HCS

Toothing crossed and milled.

Application range:


Coarse and nail-free wood from 20,0 - 175,0 mm,
firewood from Ø 20,0 - 175,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
225,0 x 18,0 x 1,25	8,5	3 Tpi	331 89235

Blades to replace

Competitive blades may vary from
our specifications

Bosch® S 1111 K Metabo® —
MP.S® — Wilpu® —
AEG® —



RUKO 8922 HCS

Toothing crossed and ground.

Application range:


Coarse and nail-free wood from 15,0 - 190,0 mm,
living wood, pruned to Ø 190,0 mm,
firewood from Ø 15,0 - 190,0 mm.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
240,0 x 18,0 x 1,6	4,0 - 6,5	5 Tpi	331 89225

Blades to replace

Competitive blades may vary from
our specifications

Bosch® S 1531 L Metabo® 31139 /
MP.S® 4052 31488
AEG® 323-803 Wilpu® 3029-240



RUKO 8904 HCS

Toothing crossed and ground.

Application range:

Structural wood, wooden wall,
chipboard, MDF, plywood, plastics.

Dimensions Length x Height x Thickness mm	Tooth spacing teeth		Article no. Cont. pcs. 5
	per mm	per inch	
300,0 x 18,0 x 1,25	4,2	6 Tpi	331 89045

Blades to replace

Competitive blades may vary from
our specifications

Bosch® S 1344 D Metabo® 31122 /
MP.S® 4015 31472
AEG® 323-802 Wilpu® 3021-300

