

HT-Series: CHR-HT, CHS-HT, CHM-HT, CRB-HT, CBW-HT

High Temperature Chip Resistors

Sizes: 0402 ... 4020

The SRT chip resistor series CHR, CHS, CHM, CRB and CBW are available with the extension “-HT” for the operating temperature range **up to 300°C**.



Features:

- **High temperature applications up to 300°C**
- Chip resistors in thick film technology
- PtAg-terminals
- Suitable for conductive epoxy applications and soldering
- Suitable for high vacuum applications – no organics
- Wire bondable resistors series CBW with Au-terminals available (up to 200°C)
- Non-magnetic



Dimensions / Technical data:

Dimensions and data are corresponding to the data of the basic series CHR, CHS, CHM, CRB and CBW (shown in the actual data sheets).

Available sizes (value range according to the data sheets of the basic series):

Size \ Series	CHR-HT	CHS-HT	CHM-HT	CRB-HT	CBW-HT
0402	●	●			●
0504	●				
0603	●	●		●	●
0612				●	
0805	●	●	●	●	●
1206	●	●	●	●	●
1210		●	●	●	
1216				●	
1216H				●	
2010	●		●		
2512	●	●	●		●
4020	●	●	●		

Special Characteristics:

- TCR is valid for the temperature range +25°C ...+125°C
- The final measuring of the resistors takes place at room temperature (independent of TCR)
- Please pay attention to the interconnection technology at high temperature applications.

HT-Series: CHR-HT, CHS-HT, CHM-HT, CRB-HT, CBW-HT

High Temperature Chip Resistors


Sizes: 0402 ... 4020

- Tolerance ranges (accordingly value range in basic series data sheet and additional restrictions in the table below):

Tolerance	Series	Sizes
from 1%	CHR-HT	1206, 2010, 2512, 4020
	CHS-HT	1206, 1210, 2512, 4020
	CHM-HT	1206, 1210, 2010, 2512, 4020
from 2%	CHR-HT	0402, 0603, 0805
	CHS-HT	0603, 0805
	CHM-HT	0805
from 5%	CHS-HT	0402
	CRB-HT	0603, 0805, 1206, 1210, 1216, 1216H
	CBW-HT	0402, 0603, 0805, 1206

- Operating temperature range: **-55°C ... +300°C** (CBW-HT: -55°C ... +200°C)
- Climatic category acc. to EN 60068-1: **55/300/56** (CBW-HT: 55/200/56)
- Stability complies with the values of the basic series with the exception that all values 0,25% and 0,5% are replaced by **1%**

Derating curve:

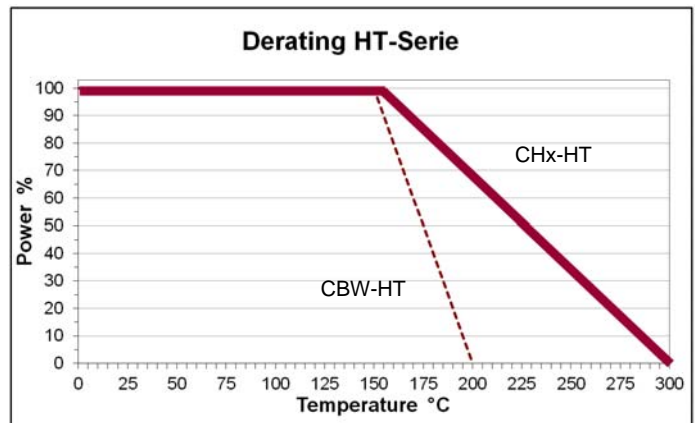

Packaging:

Bulk in plastic bags
 – minimum 100 pieces per value
 Blister tape acc. to EN 60286-3
 – minimum 500 pieces per value
 Reel diameter 180 mm or 330 mm

Ordering Data:

Type – HT – value – tolerance – TCR – packaging
 Example: *CHR 0805-HT 100K ±10% TCR250 Tape 180 mm*

Not trimmed parts are indicated by the extension “NA” in the order code:
 Type – HT – value – tolerance – NA – TCR - packaging
 Example: *CHS 4020-HT 10G ±10% NA TCR250 Tape 180 mm*

If no requirements for TCR and taping are given, the highest TCR value in table will be supplied and packaging is bulk.