

EKR 20



short description

Sound-insulated ventilation box, DN 200, single-phase AC


Article number 0080.0919

Technical Data

Air flow volume	1,800 m ³ /h
Rotating speed	2,740 1/min
Speed controllable	✓
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	385 W
I _{nom}	1.5 A
I _{max}	2.3 A
Degree of protection (IP)	X4
Insulation class	F
Mains cable	5 × 1.5 mm ²
Installation site	Duct
Housing material	Sheet steel, galvanised
Weight	38 kg
Swivelling fan	✓
Nominal size	200 mm
Airstream temperature at nominal current	-20 up to 120 °C
Airstream temperature at I _{Max}	120 °C
Ambient temperature:	50 °C
Range	C
EAN	4012799809197
Total L _{WA2} : S5 (housing sound power level)	65 dB(A)
Total L _{WA5} : S5 (free inlet sound power level)	78 dB(A)
Total L _{WA6} : S5 (free outlet sound power level)	79 dB(A)

EKR 20

Characteristic curve

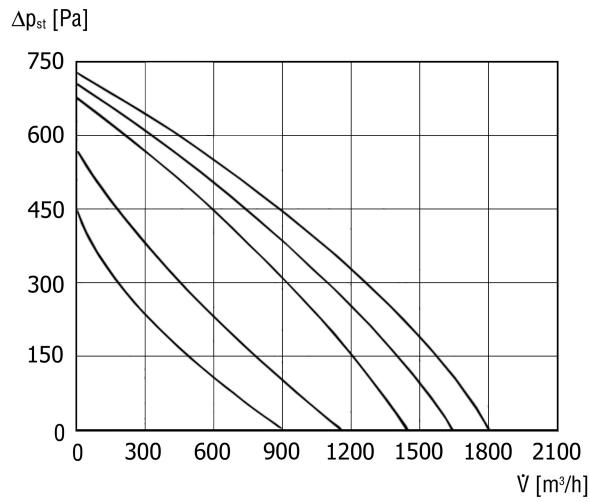

Dimensions [mm]

