

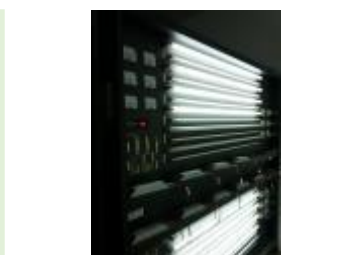








佛山凯力照明科技有限公司

Foshan Kaili Lighting Technology Co., Ltd



LED emergency lighting conversion kits



LEDYT8001



LEDYT8002



LEDYT8003



LEDYT8004

This LED emergency lighting conversion kit is a module including inverter and battery, suitable for LED lights, with series circuit providing 100% emergency output.

Technical Data:

- Main Voltage/Frequency: AC110/220V/50-60Hz
- Source Power: LED 18W
- Battery Capacity & Voltage: Ni-Cd/Ni-MH 18v; 2500mAh
- Discharge duration: 2 hours
- Emergency Output: Series circuit can be 100% lighting within 2hrs as bright as normal lighting
- Also providing 20-30% emergency output LED conversion kit as photos and PDF file


Special development and customer's solutions on request.

Specifications:


Code	LEDYT8001	LEDYT8002	LEDYT8003	LEDYT8004
Name	T8 9W led tube emergency kit	T8 18W led tube emergency kit	LED emergency kit (series circuit)	LED emergency kit (parallel circuit)
Parameter				
Main Voltage/Frequency	AC110-240V/50-60Hz			
Battery Capacity & Voltage	Ni-Cd/Ni-MH 6v; 1500mAh	Ni-Cd/Ni-MH 6v; 1800mAh	Ni-Cd/Ni-MH 18v; 2500mAh	Ni-Cd/Ni-MH 6v; 1500mAh
Power Consumption	3W	5W	18W	≅ 10W
Lamp Source Power	9W	18W		≅ 50W
Emergency Output	20~30%		100%	20~30%
Lifespan	35,000 hours			
Discharge Duration	2 hours			
Charging Time	24 hours			
Emergency Starting Time	<0.3s			
Operating Temperature	0-70°C		0-50°C	
Low Voltage Protection	Electronic Protection(approx. 1V/cell)			
Over Charge Protection	Electronic Protection			
Guarantee Period	1 year			

Fluorescent lamp Emergency conversion kits


This emergency lighting conversion kit is a module including inverter and battery, suitable for T5 & T8 fluorescent lamp providing 20-30% emergency output for 2 hours.

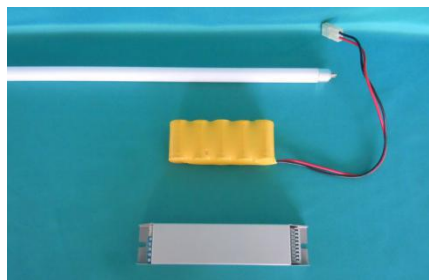


YYT5001

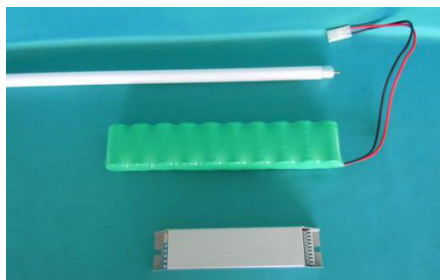

YYT5002

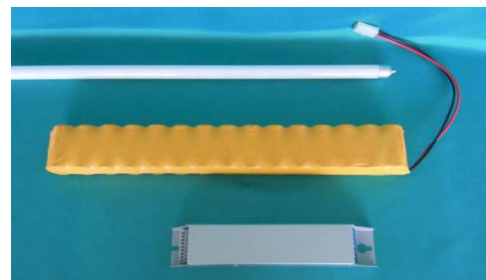

YYT5003

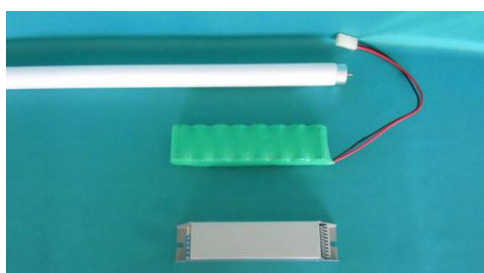

YYT8001



YYT8002

Specification of Fluorescent Tube Emergency conversion kits:

Code	YYT5001	YYT5002	YYT5003	YYT8001	YYT8002
Suitable Lamp	T5	T5	T5	T8	T8
Parameter					
Main Voltage/Frequency	AC100-240V/50-60Hz				
Battery Capacity & Voltage	Ni-Cd/Ni-MH 6v;1800mAh				
Power	14W	28W	35W	18W	36W
Emergency Output	20~30%				
Operating Temperature	-10°C-55°C				
Lifespan	35,000 hours				
Discharge Duration	2 hours				
Charging Time	24 hours				
Emergency Starting Time	<0.3s				
Low Voltage Protection	Electronic Protection(approx. 1V/cell)				
Guarantee Period	1 year				

More information please browse our website: www.ledemergencylamp.com or email ph137@163.com