


# DZD 25/4 B E Ex e

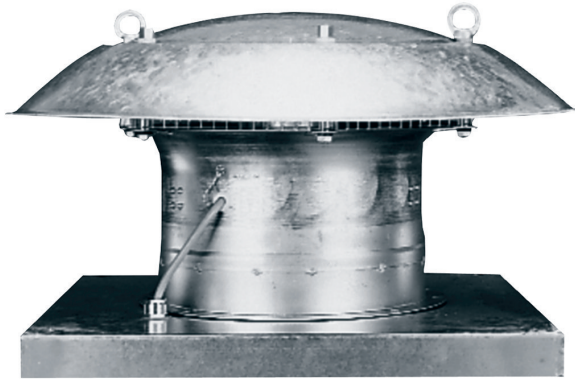

## short description

Axial roof fan, horizontal air outlet, DN 250, three-phase AC, explosion proof


Article number 0087.0796

## Technical Data

Air flow volume	820 m <sup>3</sup> /h
Rotating speed	1,475 1/min
Air direction	Ventilation and air extraction
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	38 W
I <sub>nom</sub>	0.19 A
I <sub>A</sub> /I <sub>N</sub>	3.7
Degree of protection (IP)	54
Insulation class	F
Installation site	Roof
Installation position	vertical
Housing material	Sheet steel, galvanised
Weight	17.4 kg
Nominal size	250 mm
Airstream temperature at nominal current	40 °C
Airstream temperature at I <sub>Max</sub>	40 °C
Explosion protection	Ex II 2G
Temperature class	T4
Range	C
EAN	4012799877967
Total L <sub>WA5</sub> , high (free inlet sound power level )	68 dB(A)

# DZD 25/4 B E Ex e

## Characteristic curve

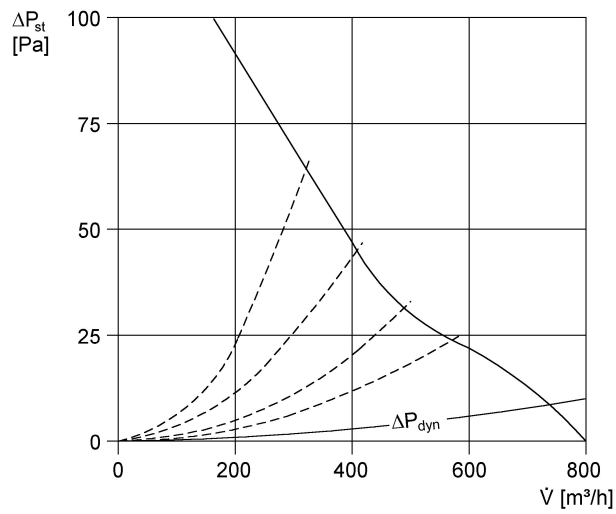

## Dimensions [mm]

