

- Modular system
- Bearingless modular system
- Contactless transmission
- Compact and low-maintenance
- Ethernet transmission
- High current transmission

Our Pulses for Innovations



The Kübler Group belongs today to the leading specialists worldwide in the fields of position and motion sensors, functional safety, counting and process technology and transmission technology.

Founded in the year 1960 by Fritz Kübler, the family business is now led by the next generation of Gebhard and Lothar Kübler.

Ten international group members and distributors in more than 50 countries offer local product know-how, service and advice throughout the world.

Innovative product and sector solutions, as well as solutions for functional safety and a high level of service, are the reasons behind our global success.

The strict focus on quality ensures the highest levels of reliability and a long service life for our products in the field.

Over 480 dedicated people worldwide make this success possible and ensure that customers can continue to place their trust in our company.



Kübler Service for worldwide Planning Reliability



24one

24one delivery promise

Manufacturing in 24 hours. For orders placed on working days before 9 AM, the product will be ready for dispatch on that same day. 24one is limited to 20 pieces per delivery.



Sample Service

We manufacture samples of special designs or according to customer specification within shortest time.

10 by 10

10 by 10

We will manufacture and deliver 10 encoders within 10 working days (365 days a year - with the exception of 24th Dec. until 2nd Jan.)



Safety Services

- Adapted service packages
- Individual customer solutions

48h

48 h Express-Service

We can process your order within 48 hours; we can ship stock items the same day.



Tailor-made Solutions – Kübler Design System (KDS) OEM Products and Systems (OPS)

We develop jointly with our customers product and engineering solutions for customer-specific products, integrated drive solutions, up to complete systems.



Technical Support

Kübler' applications team is present on site all over the world for advice, analysis and support.

Kübler Germany / Austria +49 7720 3903 952
 Kübler France +33 3 89 53 45 45
 Kübler Italy +39 026 423 345
 Kübler Poland +48 61 84 99 902

Kübler Turkey +90 216 999 9791
 Kübler China +86 10 8471 0818
 Kübler India +91 2135 618200
 Kübler USA +1 855 583 2537

Our Product Portfolio



Position and Motion Sensors

- Incremental and absolute encoders
- Fieldbus and Industrial Ethernet encoders
- Bearingless encoders
- Explosion protected encoders ATEX / IECEx
- Linear magnetic measuring systems
- Draw-wire encoders
- Inclinometers
- Connection technology
- Optical fiber signal transmission modules

Slip Rings

- Modular system
- Bearingless modular system
- Contactless transmission
- Compact and low-maintenance
- Ethernet transmission
- High current transmission

Functional Safety

- Certified incremental and absolute encoders
- Certified explosion-protected encoders ATEX / IECEx
- Modules for safe drive monitoring
- Safe fieldbus gateways
- Safe speed monitors
- Adapted service packages
- Connection technology

Counters and Process Devices

- Pulse counters and preset counters
- Hour meters and timers
- Frequency meters and tachometers
- Combination time and energy meters
- Position displays
- Process displays and controllers for temperature, analog signals and strain-gauge
- Setpoint adjuster

We offer Solutions for the following Industries:



The high performance level and reliability of the Kübler products are based on our long experience in these demanding application sectors. Learn more about our application-specific solutions under:

www.kuebler.com/industries

Slip Rings

Table of contents

Product Overview / Basics	5
Slip Rings	13
Connection Technology	35
Addresses	41










		Page
Product overview		6
Technical basics	Slip rings	7

You will find comprehensive information about the basic technical knowledge relating to our products on our homepage, at the address www.kuebler.com/basics



Product overview

Slip rings

		Power / Current (Load)	Signal (Data)	Pneumatics	Hydraulics	N° of channels	Ø Hollow shaft max. in mm [inch]	Current max. in A	Protection max.	Speed max. in min ⁻¹	Temperature range max. in °C [°F]	Page
	Modular, construction system SR085	•	•	•	•	max. 20	30	25	IP64	800	-35 ... +85 [-31 ... +185]	14
	Modular, construction system, bearingless SR085B	•	•	–	–	max. 10	34	16	IP40	200	0 ... +75 [+32 ... +167]	17
	Modular, contactless signal transmission SRI085	•	•	–	–	max. 9	30	16	IP64	800	-30 ... +85 [-22 ... +185]	19
	Compact, low-maintenance SR060E	•	•	–	–	max. 5	25	20	IP64	500	0 ... +75 [+32 ... +167]	22
	Three chamber system, Ethernet transmission SR120	•	•	•	•	on request	–	25	IP64	300	-35 ... +85 [-31 ... +185]	24
	Modular, robust SR160	•	•	•	•	on request	–	25	IP65	150	-35 ... +85 [-31 ... +185]	28
	Modular, robust, high current SR250H	•	•	•	•	on request	–	80 ¹⁾	IP65	150	-35 ... +85 [-31 ... +185]	31

1) > 80 A on request.

Slip rings

General information / Mounting

Description

Slip rings are basically used for transmitting electrical current, signals or data, pneumatics and hydraulics from a stationary to a rotary platform.

Kübler slip rings feature a particularly rugged compact design, long maintenance cycles and a long service life.


In slip rings, the electrical transmission between the stator and rotor units takes place via sliding contacts and is extremely reliable.

The SR085 family has a modular construction and offers highest flexibility for a wide variety of applications.

Slip ring mounting


Hollow shaft mounting

- Slide the slip ring on the hollow shaft
- Tighten the setscrews and secure them with screw stop varnish
- Secure the slip ring against rotation with the torque stop

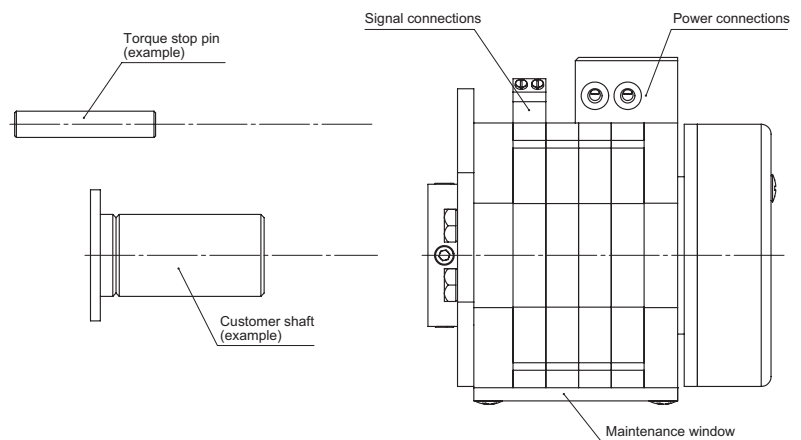

Flange mounting

- Connect the electrical and pneumatic transmission
- Fasten the flange with the screws and secure the screws with appropriate means, e.g. spring washers, screw stop plates
- Secure the slip ring against rotation with the torque stop

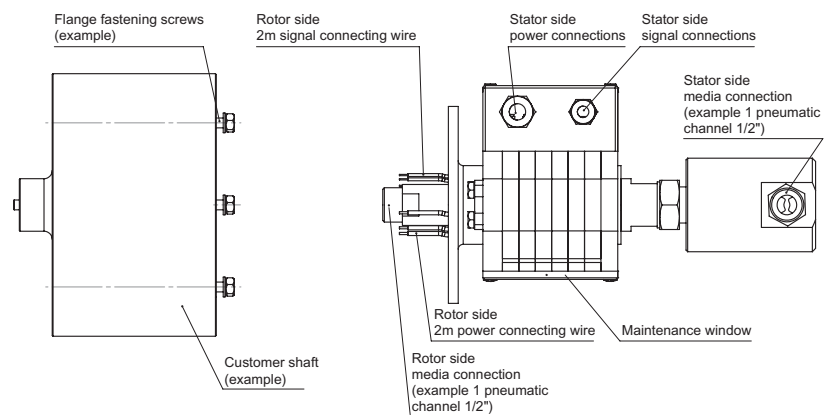

Slip rings

Mounting

Mounting position

The slip rings of the SR085 and SR060 series can be configured for the following electrical transmissions:

- Only signal transmission
- Only power current transmission
- Mixed transmission of signals and power

In the latter case, for a vertical installation, care must be taken so that the signal rings are always located on top. This reduces the possible risk of contaminating the signal contacts.

The slip rings of the SR085 series may be installed standing, horizontally and suspended.

A distinction is thus made among the installation positions in order to minimize the contamination of the signal channels.

The slip rings of the SR060 series are designed only for horizontal or suspended installation.



The mounting position is to be defined in the order code as follows:

SR085-XX-XX-XX-X1XXX-VXXX
in case of standing and horizontal installation
(flange at the bottom)



SR085-XX-XX-XX-X2XXX-VXXX
in case of suspended and horizontal installation
(flange on top)

SR085-XX-XX-XX-X0XXX-VXXX
in case of only load or only signal transmission

Mounting position standing

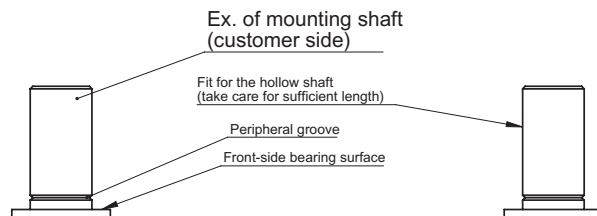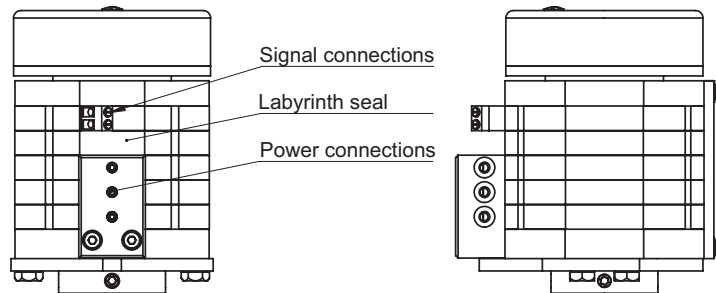

Mounting position suspended

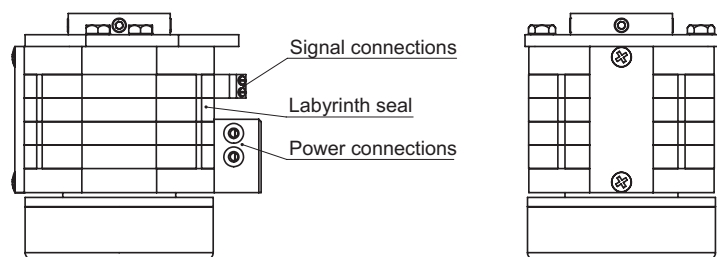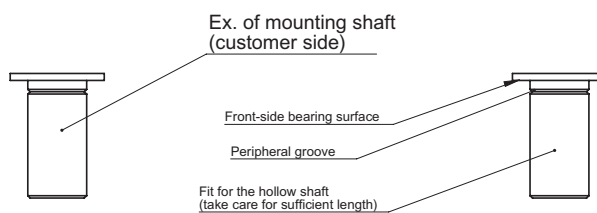

Slip rings Contactmaterials and characteristics

For load transmission

Copper alloy

Use: Standard contacts for power channels
Characteristics: Suitable for high currents, very low voltage drop, very low friction coefficient, and thus long service life



Stator ring with copper alloy contacts

Bronze

Use: Standard slip ring for power channels
Characteristics: Good contact properties, long service life



Bronze slip rings with insulator

For signal / data transmission

Silver alloy

Use: Standard contact for signal/data channels
Characteristics: Safe transmission of data and signals, especially for very low currents and voltages, very low contact resistance, easy maintenance, no contact oil required, long service life, longer maintenance cycles



Stator ring with silver alloy contacts

Precious metal alloy

Use: As a standard slip ring for signal channels, paired with silver alloy contacts
Characteristics: Safe transmission of data and signals, especially for very low currents and voltages, very low contact resistance. Suitable for intermittent operation (long standstill periods)



Slip rings out of special precious metal alloy with insulator

Slip rings Maintenance

Maintenance

Regular and appropriate maintenance is determining for the safety and service life of the slip ring.

Unless otherwise specified in the technical data sheet, the following maintenance intervals apply:


- 1st interval after max. 50 million revolutions or after 1 year
- Every further maintenance interval max. 100 million revolutions or at the minimum once per year



Maintenance plan

Depending on the rotational speed and on the operating mode, the specified maintenance intervals are reached more or less quickly. In case of continuous operation and corresponding rotational speeds, maintenance will be required, depending on the contact material of the signal/data channels, after the following number of months of operation:

Signal/data channels, contact material silver alloy / precious metal

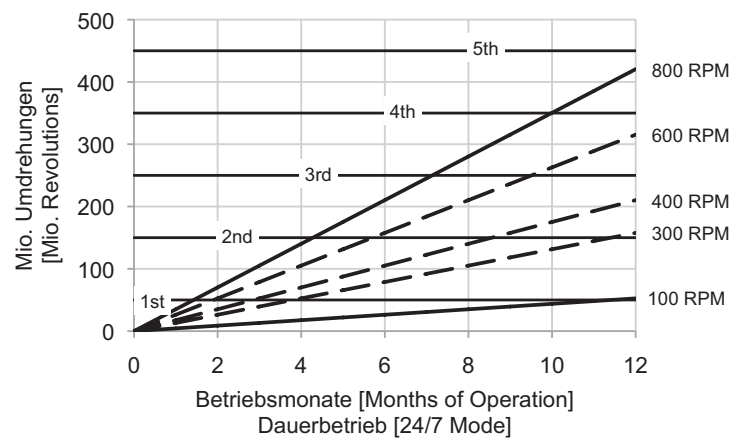


Slip rings


Maintenance

Position of the maintenance window

Slip ring with maintenance window at the bottom
(slip ring for power current up to 16 A)



Slip ring with maintenance window on the side
(slip ring for power current over 16 A)

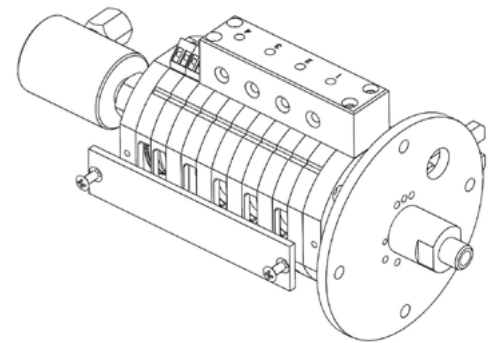


Note:

The accurate description of the maintenance work can be found in the respective maintenance instructions.

Rotational speeds

The maximum rotational speed depends on the mounting position and on the number of channels eg. housing rings (see fig.).

For higher rotational speeds, please contact the manufacturer.

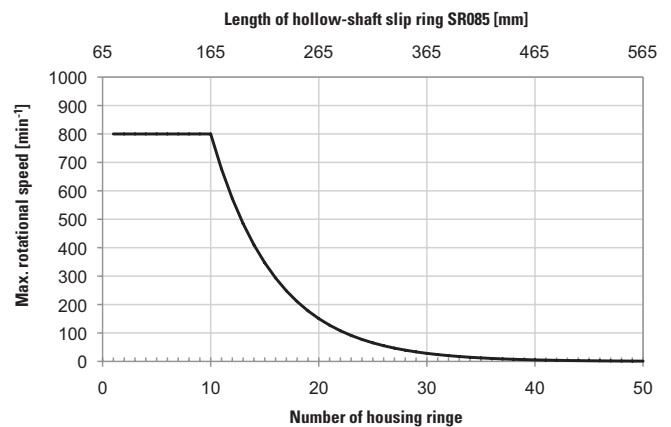


Slip rings are to be mounted by the customer so as to prevent them from oscillating and to ensure optimal rotation. The setscrews must be tightened evenly.

Unless otherwise specified, the shaft receiving the slip ring should have a h7 fit.




Whenever possible, always tighten the opposite screws consecutively and evenly. In addition, at least 1/3 of the whole slip ring length should be in contact with the shaft.

Safety-Trans™-Design

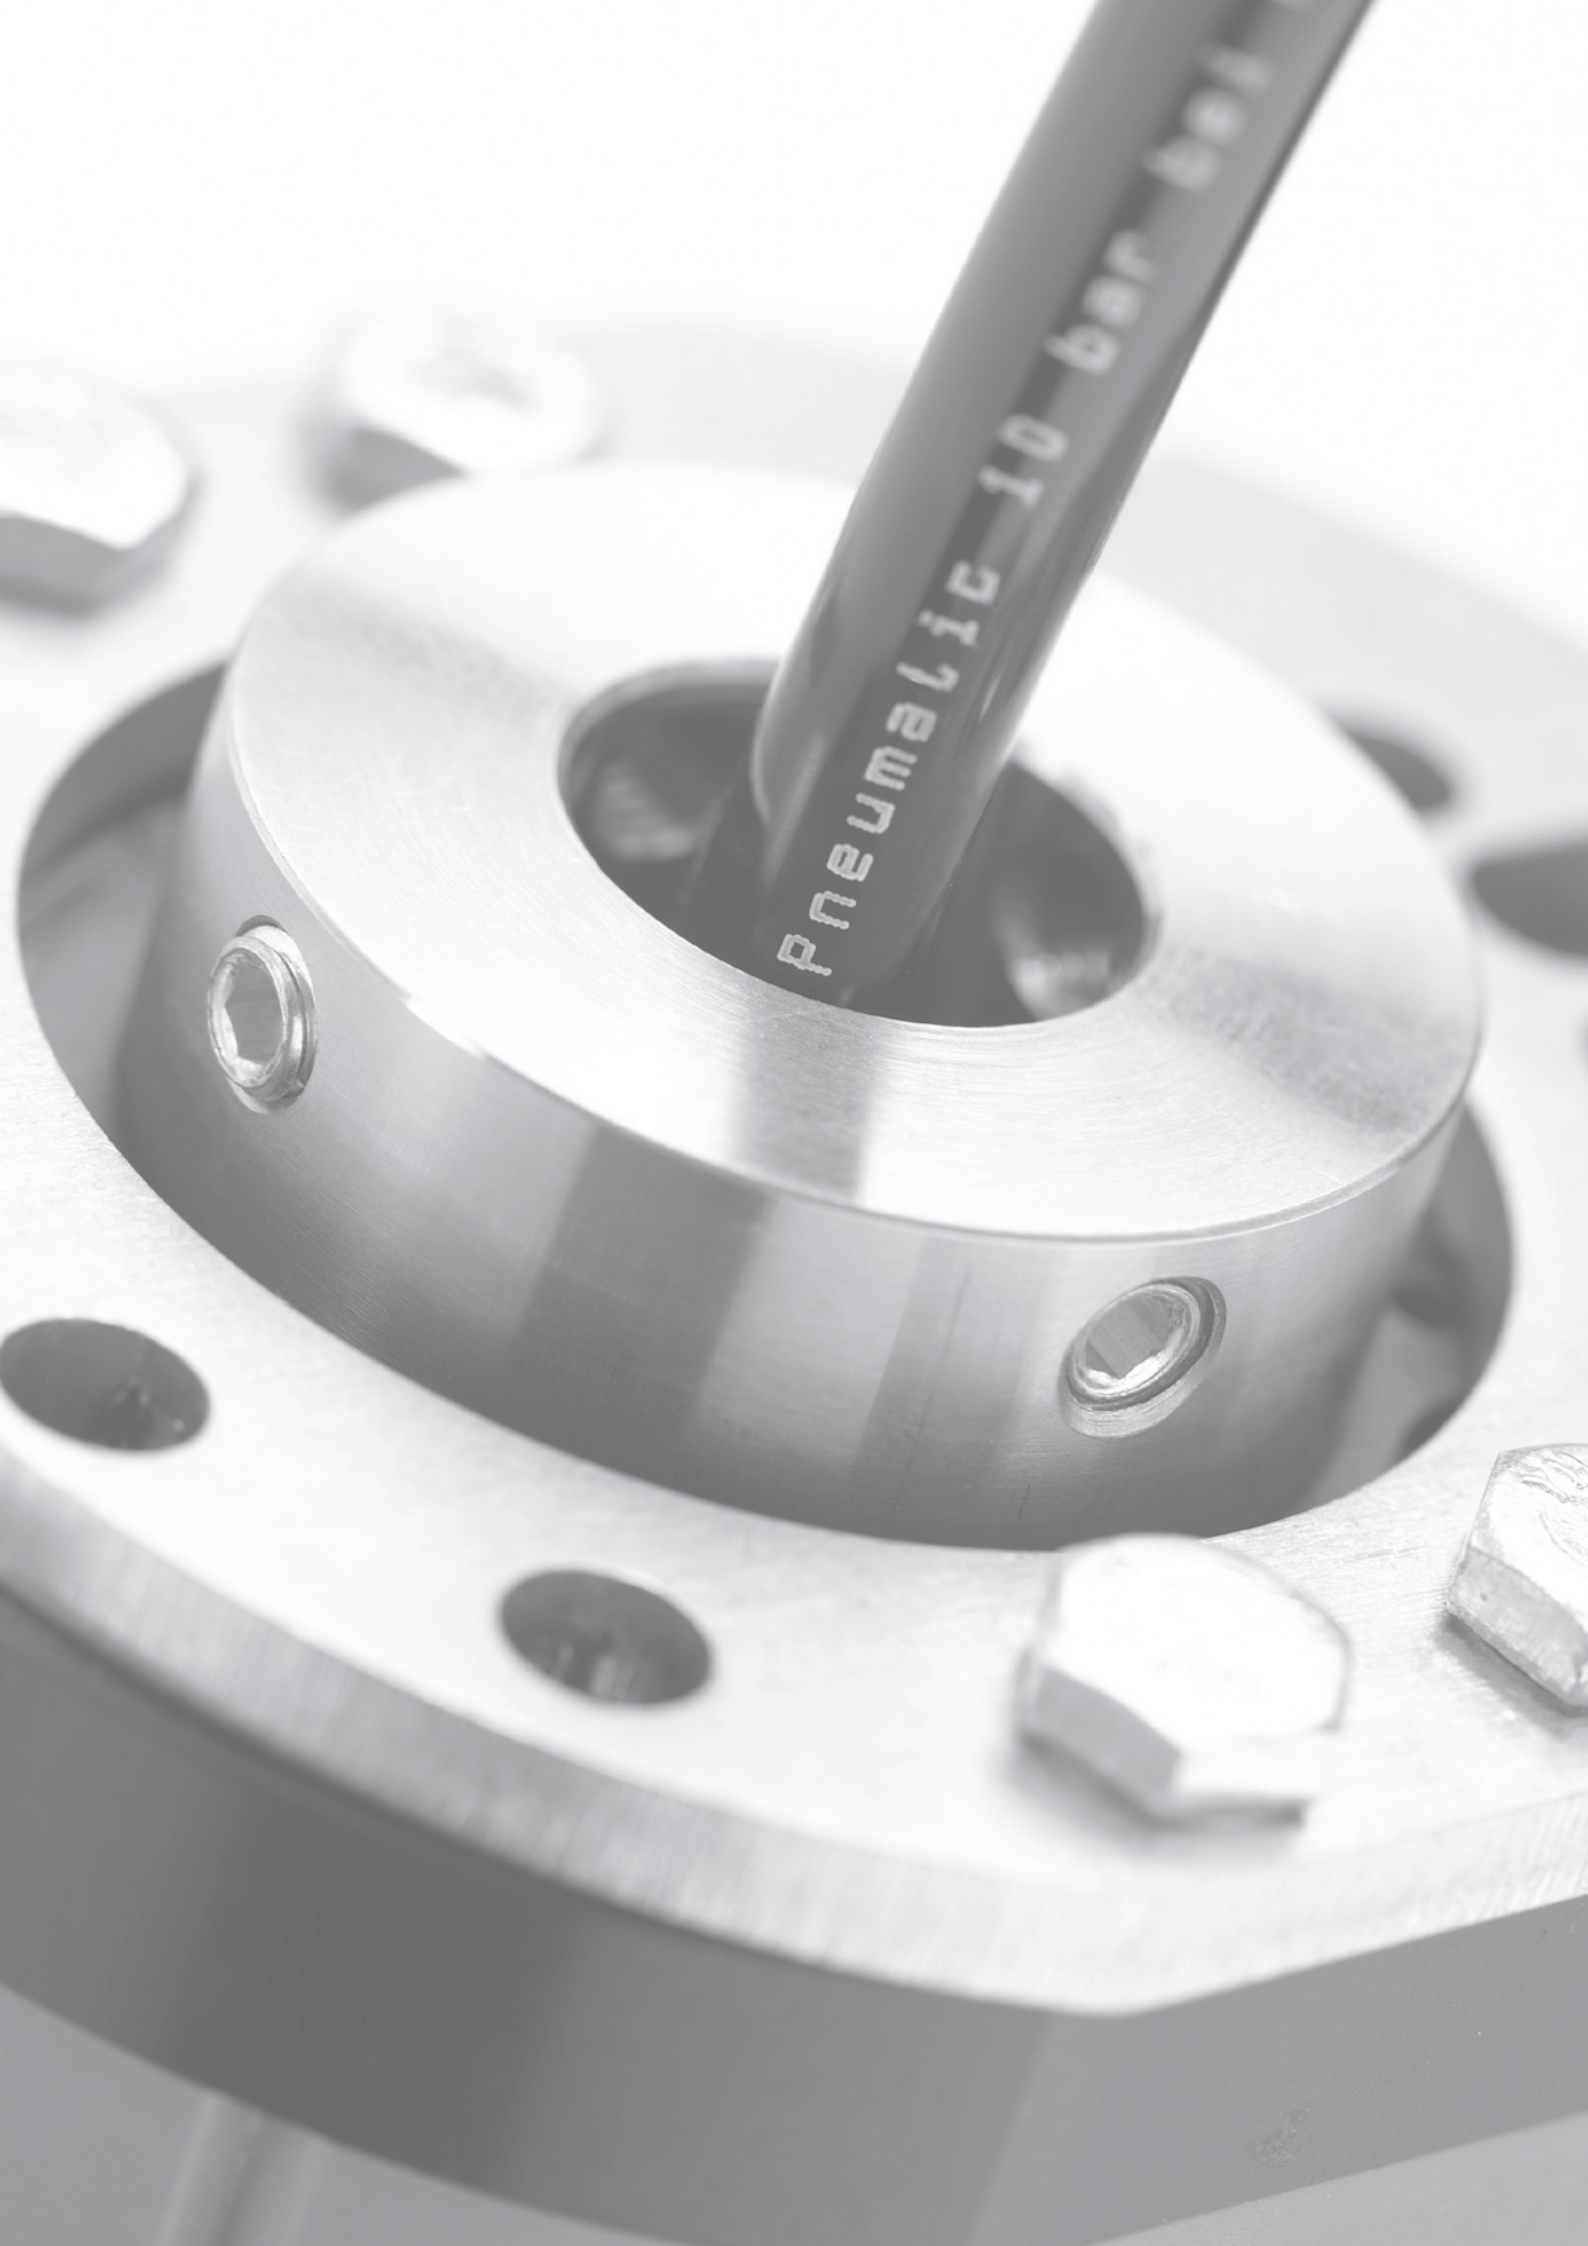Two-chamber system for simultaneous load and signal transmission. The power and the signal area are separated by a special labyrinth seal. This allows minimizing a possible contamination of the signal contacts.



Slip rings

		Type	Page
Slip rings	Modular – Construction system	SR085	14
	Modular – Construction system, bearingless	SR085B	17
	Modular – Contactless signal transmission	SRI085	19
	Compact – Low-maintenance	SR060E	22
	 Three chamber system – Ethernet transmission	SR120	24
	 Modular – Robust	SR160	28
	 Modular – Robust, high current	SR250H	31

Slip rings

Modular	Construction system	SR085
----------------	----------------------------	--------------



In general slip rings are used to transmit power, signals or data, pneumatic and hydraulic, from a stationary to a rotating platform.

The transmission between the stator and rotor takes place via sliding contacts and is extremely reliable.

The construction is modular and offers the greatest flexibility in a variety of applications.

Flexible and rugged

- Modular construction system, load and signal/data channels can be combined as desired.
- Rugged GFPC housing (glass-reinforced polycarbonate), 30% glass-fiber content for industrial usage.
- Long service life and long maintenance cycles.

Reliable with Safety-Trans™ Design

- Two-cavity system for load and signal transmission.
- Labyrinth seal.
- High vibration resistance.
- Fieldbus signals such as Profibus, CANopen etc. up to 12 Mbit/sec.

Applications

Packaging machines, textile machines, pipeline inspection systems, video surveillance equipment, bottling plants, rotary tables

Standard models

Delivery time is 10 working days for a maximum of 10 pcs. per delivery. Larger quantities have a delivery time of 15 working days (or alternatively on request).



	Signal / data channels	Load channels	Contact material	Order no.
Hollow shaft 25 mm [0.98"]	4 x	4 x	silver / precious metal	SR085-25-04-04-11301-V100
	6 x	6 x	silver / precious metal	SR085-25-06-06-11301-V100
Hollow shaft 30 mm [1.18"]	2 x	3 x	silver / precious metal	SR085-30-02-03-11301-V100
	6 x	6 x	silver / precious metal	SR085-30-06-06-11301-V100

Order code

SR085	-	XX	-	XX	-	XX	-	XXXXXX	-	V100
Type		a		b		c		d e f g h		i

Non-standard models will be checked for availability - an alternative model may be proposed. Minimum order quantity 5 pieces for new models. For orders < 5 pieces, we will invoice a one-shot lump sum for new variants. For list of all available types, see www.kuebler.com/sr-list

<p>a Type of mounting</p> <p>00 = flange mounting</p> <p>20 = hollow shaft, ø 20 mm [0.79"]</p> <p>24 = hollow shaft, ø 24 mm [0.94"]</p> <p>25 = hollow shaft, ø 25 mm [0.98"]</p> <p>30 = hollow shaft, ø 30 mm [1.18"]</p> <p>IN = hollow shaft, ø 1"</p> <p>(other options on request)</p>	<p>d Max. load current</p> <p>0 = no load channels</p> <p>1 = 16 A, 240 V AC/DC</p> <p>2 = 25 A, 240 V AC/DC</p> <p>3 = 10 A, 400 V AC/DC</p> <p>4 = 20 A, 400 V AC/DC</p>	<p>f Contact material for signal / data channels²⁾</p> <p>0 = no signal channels</p> <p>3 = silver / precious metal</p>	<p>h Protection rating</p> <p>1 = IP50</p> <p>2 = IP64</p>
<p>b Number of signal / data channels¹⁾</p>	<p>e Mounting position</p> <p>0 = any, only with either load or signal channels</p> <p>1 = standing and horizontal (flange down)</p> <p>2 = hanging and horizontal (flange up)</p>	<p>g Media lead-through</p> <p>0 = none</p> <p>only flange mounting (00):</p> <p>1 = air, connection 1/4"</p> <p>2 = air, connection 1/2"</p> <p>3 = air, connection 3/8"</p> <p>4 = hydraulics, connection 1/2"</p> <p>5 = hydraulics, connection 3/8"</p> <p>hollow shaft or shaft mounting:</p> <p>6 = air, rotatable connector (up to 300 min⁻¹)</p>	<p>i Version number (options)</p> <p>V100 = without options</p> <p>>V100 = Options on request, e.g.:</p> <ul style="list-style-type: none"> - > 20 channels - other types of mounting - other types of connection e.g. plug connectors

1) Max. 20 signal/data channels (no load), combinations of data and load channels > 13 upon request.
 2) Contact material gold / gold and copper / bronze on request.

Slip rings

Modular	Construction system	SR085
----------------	----------------------------	--------------


Technical data (standard version)		
Overall length	dep. on the number of transmission paths	
Hollow shaft diameter	up to \varnothing 30 mm [1.18"]	
Type of connection		
hollow shaft mounting	stator:	terminal clamp
	rotor:	screw terminal
flange mounting	stator:	terminal clamp
	rotor:	single wires, 2 m [6.56"] (towards the assembly flange)
Voltage/current loading		
load channels	240 V AC/DC, max. 16 A (order option 1)	
	240 V AC/DC, max. 25 A (order option 2)	
	400 V AC/DC, max. 10 A (order option 3)	
	400 V AC/DC, max. 20 A (order option 4)	
signal channels	48 V AC/DC, max. 2 A	
Contact resistance		
load channels	\leq 1 Ohm (dynamic) ¹⁾	
signal / data channels	\leq 0.1 Ohm (silver / precious metal) ²⁾	
Insulation resistance	10 ³ MOhm, at 500 V DC	
Dielectric strength	1000 V eff. (60 sec.)	
Speed max. (signal / data channels)	800 min ⁻¹ , up to 10 channels (depends on installation position and numbers of channels)	
Service life (signal / data channels)	typ. 500 million revolutions (at room temperature) depends on installation position	
Maintenance cycles	first maintenance after 50 million revolutions, all further maintenance intervals after 100 million revolutions	
Maintenance	contact oil not required	
Material pairing		
load channels	copper / bronze	
signal / data channels	silver / precious metal	
Operating temperature	-35° ... +85°C [-31°F ... +185°F]	
Protection acc. to EN 60529	max. IP64	
Transmission paths	max. 20 (> 20 on request)	

Air connection (media lead-through no. 1 - 3)	
Air pressure max.	10 bar (150 psi)
Vacuum max.	7 kPa (2" Hg)
Speed max.	800 min ⁻¹

Hydraulics connection (media lead-through no. 4 + 5)	
Hydraulic pressure max.	35 bar (510 psi)
Speed max.	800 min ⁻¹

Rotatable connector, air (media lead-through no. 6)	
Air pressure max.	10 bar (150 psi)
Speed max.	300 min ⁻¹
For tube diameter	8 mm [0.31"]

Modular construction system

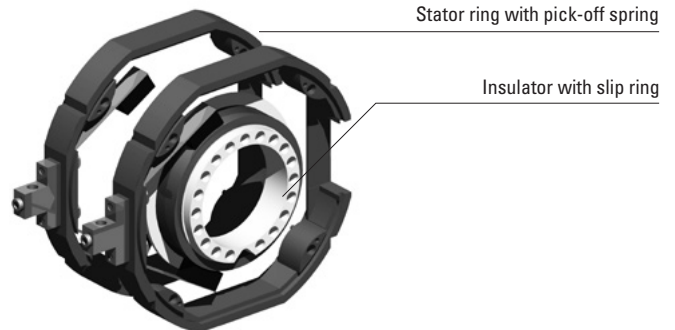

Technology in detail

Easily accessible connections



IP64 version with rotor and stator protective cover



Practical maintenance window



Hollow shaft mounting with rotatable connector (air), for tube diameter 8 mm [0.31"]

Version with media lead-through (air, hydraulics)



1) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.
2) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.

Slip rings


Modular	Construction system	SR085
----------------	----------------------------	--------------

Dimensions

Dimensions in mm [inch]

Standard version


Example: Type SR085-25-02-03-11301-V100
(2 data channels, 3 load channels)

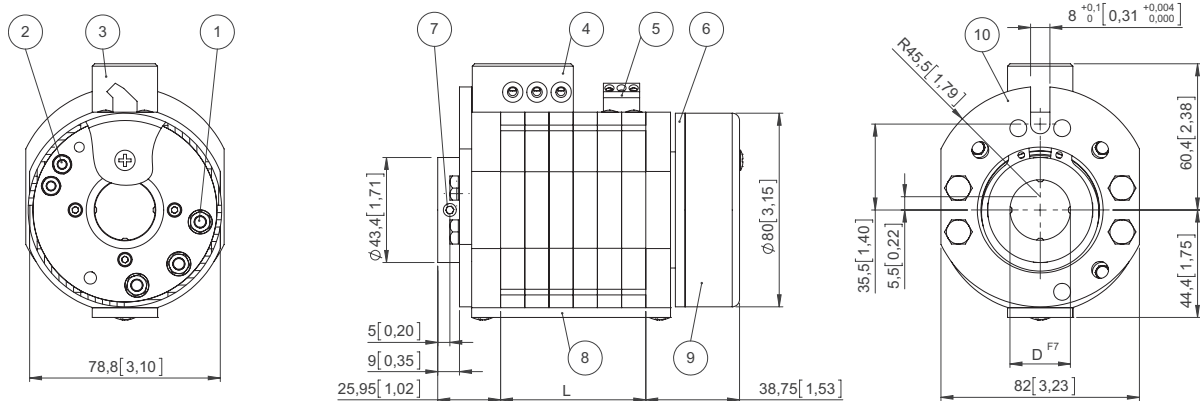

- | | | |
|------------------------------------------------------------------------------------------|---------------------------------------------------|--------------------------------------|
| 1 – Screw terminal M5 for load transmission | 4 – Wire lead-in for power possible on both sides | 8 – Maintenance window |
| 2 – Screw terminal M4 for signal transmission | 5 – Terminal clamp for signal transmission | 9 – Protective cover for connections |
| 3 – Terminal clamp for power without wire protection, with shock-hazard touch protection | 6 – Rotating connection ring | 10 – Torque stop |
| | 7 – 4 x socket set screw DIN 914 M6 | |

Air lead-through versions

Example: Type SR085-00-04-03-11322-V100

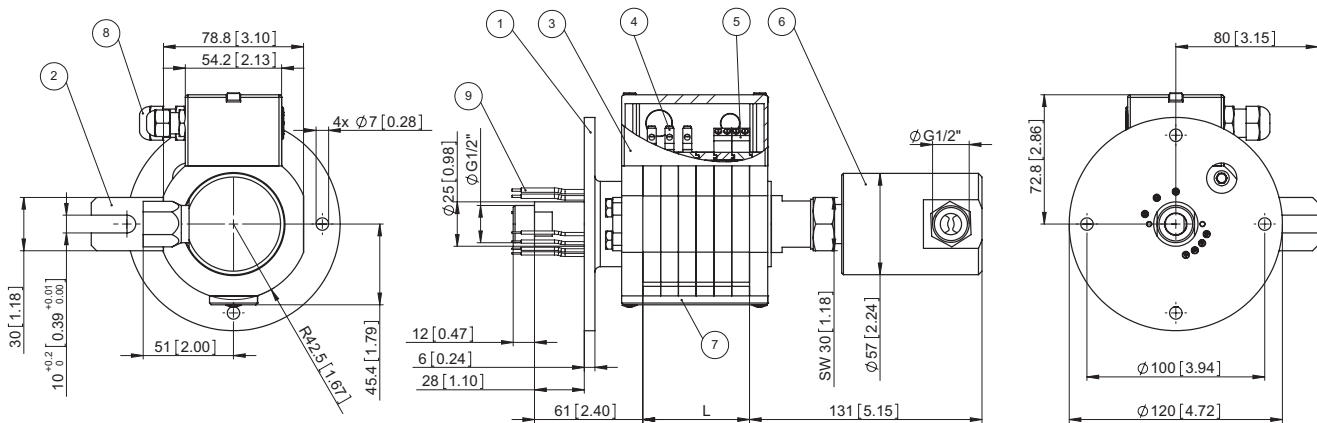


- | | | |
|-----------------------------|---------------------------|-----------------------------------|
| 1 – Mounting flange | 4 – Terminal clamp power | 7 – Maintenance window |
| 2 – Torque stop | 5 – Terminal clamp signal | 8 – Cable gland |
| 3 – Stator protective cover | 6 – Media lead-through | 9 – Connection wires, 2 m [6.56'] |

Calculation of the overall length

Basic dimensions	
slip ring with hollow shaft	64.5 mm [2.54"]
slip ring with flange mounting and media lead-through 1/2" or 3/8"	185 mm [7.28"]
slip ring with flange mounting and media lead-through 1/4"	168 mm [6.61"]
Additional dimensions	
+ number of signal/data channels (silver / precious metal)	+ 10 mm [0.39"] per data channels
+ number of load channels, order options 1 and 2	+ 10 mm [0.39"] per load channel
+ number of load channels, order options 3 and 4 (10 or 20 A, 400 V)	+ 20 mm [0.79"] per load channel, if only load + 10 mm [0.39"]
+ labyrinth isolation ring for load and signal transmission	+ 10 mm [0.39"]

Slip rings

Modular	Construction system, bearingless	SR085B
----------------	-----------------------------------------	---------------

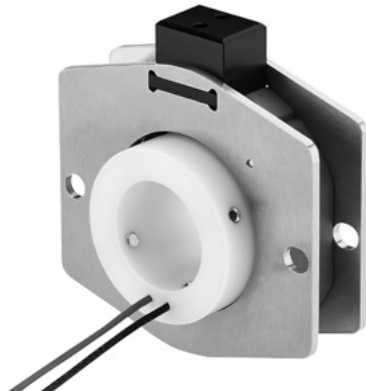

In general slip rings are used to transmit power, signals or data from a stationary to a rotating platform.

The SR085B is a cost-effective bearingless slip ring. Its flexible modular system allows a wide range of customer-specific applications.


The SR085B is ideally suited for the transmission of signals, data and/or loads.

Slip rings

<p>Flexible and slim</p> <ul style="list-style-type: none"> • Modular construction system, can be combined as desired. • From 33 mm mounting depth. • Cost-effective bearingless construction. • Long service life and long maintenance cycles. 	<p>Applications</p> <p>Revolving doors, rotary tables, rotary show cases, packaging machines, other low speed applications.</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------

Order code	SR085B - XX - XX - 10X - V100
	Type a b c d e f
a Type of mounting	b Number of channels
20 = hollow shaft, ø 20 mm [0.79"]	max. 10 channels
24 = hollow shaft, ø 24 mm [0.94"]	
25 = hollow shaft, ø 25 mm [0.98"]	c Max. load current
30 = hollow shaft, ø 30 mm [1.18"]	1 = 16 A, 240 V AC/DC
34 = hollow shaft, ø 34 mm [1.34"]	
(other options on request)	d Mounting position
	0 = any
	e Contact material
	3 = silver / precious metal
	5 = copper / bronze
	f Version number (options)
	V100 = without options
	>V100 = options on request

Technical data (standard version)	
Overall length	dep. on the number of transmission paths
Hollow shaft diameter	up to ø 34 mm [1.34"]
Voltage/current loading	240 V AC/DC, max. 16 A
Contact resistance	
load channels	≤ 1 Ohm (dynamic) ¹⁾
signal / data channels	≤ 0.1 Ohm (silver / precious metal) ²⁾
Insulation resistance	10 ³ MOhm, at 500 V DC
Dielectric strength	1000 V eff. (60 sec.)
Speed max.	200 min ⁻¹
Protection acc. to EN 60529	IP40
Service life	typ. 500 million revolutions (at room temperature) depends on installation position
Maintenance cycles	typ. 100 million revolutions
Maintenance	contact oil not required
Operating temperature	0°C ... +75°C [+32°F ... +167°F]

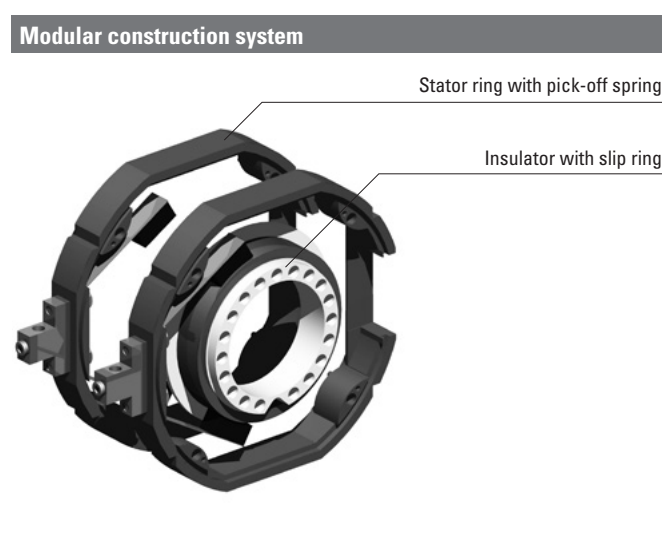


1) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.
 2) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.

Slip rings

Modular **Construction system, bearingless** **SR085B**

Dimensions

Dimensions in mm [inch]

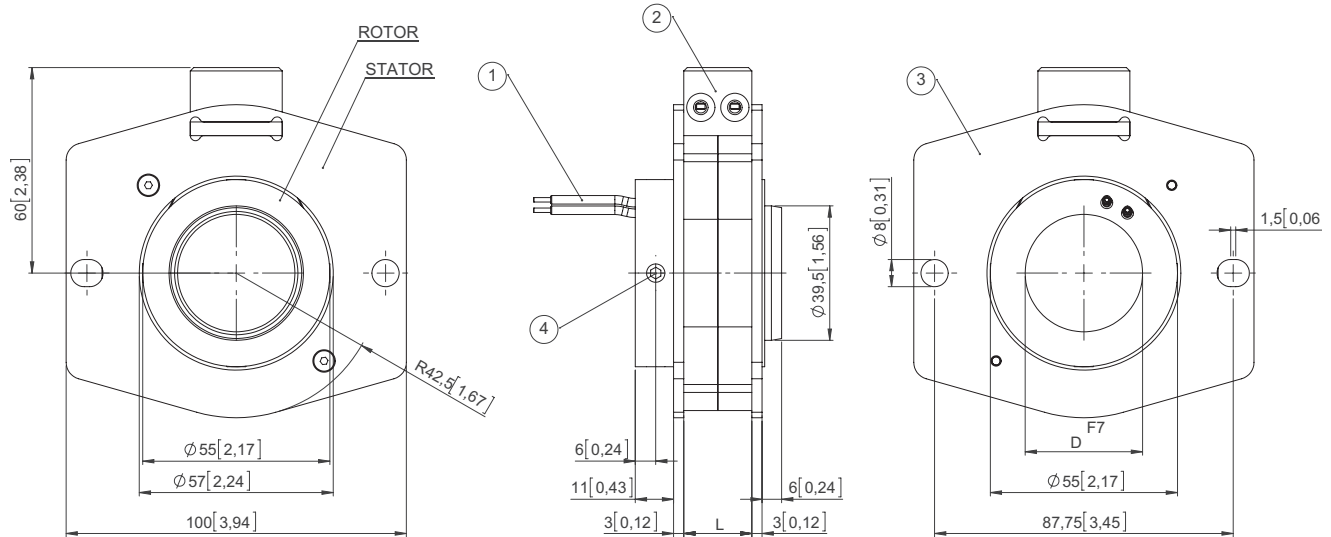

Permitted misalignment rotor/stator
axial = max 0.5 mm
radial = max 0.5 mm

- 1 – Connection wires, length 1 m [3.28']
- 2 – Terminal clamp for power without wire protection, with shock-hazard touch protection
- 3 – Stator cover, mounting plate
- 4 – 4 x socket set screw DIN 914 M6

Calculation of the total length L:

Basic size: 23 mm

Additional dimension: +10 mm per channel

Slip rings

Modular	Contactless signal transmission	SRI085
----------------	----------------------------------------	---------------



In general slip rings are used to transmit electrical power, signals or data, pneumatic and hydraulic, from a stationary to a rotating platform.

In the SRI085, signal transmission occurs by means of a contactless inductive coupling. This ensures the data channels without maintenance requirements.

The construction is modular and offers the greatest flexibility in a variety of applications.

Slip rings

Flexible and rugged	Maintenance-free
<ul style="list-style-type: none"> Modular construction system, load and signal/data channels can be combined as desired. Rugged GFPC housing (glass-reinforced polycarbonate) for industrial usage. Low signal noise. 	<ul style="list-style-type: none"> Signal / data channels maintenance-free by means of inductive coupling. Long service life.
Applications	
Packaging machines, rotary tables and textile machines	

Order code	SRI085 - XX - XX - XX - X1X1 - V100 <small>Type a b c d e f g h</small>
a <i>Type of mounting</i> 20 = hollow shaft, ø 20 mm [0.79"] 24 = hollow shaft, ø 24 mm [0.94"] 25 = hollow shaft, ø 25 mm [0.98"] 30 = hollow shaft, ø 30 mm [1.18"] IN = hollow shaft, ø 1" (other options on request)	b <i>Number of sensor channels</i> 01 = 1 x PT100 03 = 3 x PT100 c <i>Number of power channels</i> 01 ... 06 = max. 6 power channels d <i>Max. load current</i> 0 = no load channels 1 = 16 A, 240 V AC/DC
e <i>Interface</i> 1 = output 4 ... 20 mA	f <i>Media lead-through</i> 0 = none 6 = air, rotatable connector (up to 300 min ⁻¹)
g <i>Protection rating</i> 1 = IP50	h <i>Version number (options)</i> V100 = without options >V100 = options on request

Connection technology	Order no.
Cordset, pre-assembled	
M12 female connector with coupling nut, 8 pin 2 m [6.56'] PUR cable	05.00.6051.8211.002M
Connector, self-assembly (straight)	
M12 female connector with coupling nut, 8 pin	05.CMB 8181-0

Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Easily accessible connections



Slip rings

Modular	Contactless signal transmission	SRI085
----------------	----------------------------------------	---------------

Technical data

Load transmission	
Current carrying capacity voltage / current	max. 240 V / 16 A max. 240 V / 25 A
Contact resistance	< 1 Ohm
Insulation resistance	< 10 ⁸ MOhm
Dielectric strength	1000 V eff.

Data transmission	
Data signal	PT100
Measuring range	0°C ... +300°C [+32°F ... + 572°F] (4 ... 20 mA)
Power supply	24 V DC, ±10%
Interface	4 ... 20 mA
Power consumption	max. 250 mA at 24 V DC
Max. load of the current source	400 Ohm
Type of connection	Flange connector M12, A coded (terminal assignment see connection table)

Mechanical characteristics		
	only data transmission SRI085-XX-0X-00-010X-V100	mixed data and load transmission SRI085-XX-XX-XX-X101-V100
Speed	max. 800 min ⁻¹	max. 800 min ⁻¹
Service life	–	typ. 500 million revolutions
Maintenance cycles	maintenance-free	150 million revolutions
Operating temperature	-30°C ... +85°C [-22°F ... +185°F]	-30°C ... +85°C [-22°F ... +185°F]
Protection to EN 60529	max. IP65	max. IP50
Contact material load channel	–	copper/bronze

Rotatable connector, air (media lead-through no. 6)	
Air pressure max.	10 bar (150 psi)
Speed max.	300 min ⁻¹
For tube diameter	8 mm [0.31"]

Terminal assignment

Number of sensor channels	Flange connector M12, 8 pin								
1 x PT100	Signal:	–	–	–	0 V	24 VDC	channel 1, PT100	channel 1, 0 V	–
	Pin:	1	2	3	4	5	6	7	8

Number of sensor channels	Flange connector M12, 8 pin								
3 x PT100	Signal:	channel 2, PT100	channel 3, PT100	channel 3, 0 V	0 V	24 VDC	channel 1, PT100	channel 1, 0 V	channel 2, 0 V
	Pin:	1	2	3	4	5	6	7	8

Top view of mating side, male contact base



Flange connector M12, 8 pin


Slip rings

Modular **Contactless signal transmission** **SRI085**

Dimensions

Dimensions in mm [inch]

Example: SRI085-25-03-03-1101-V100

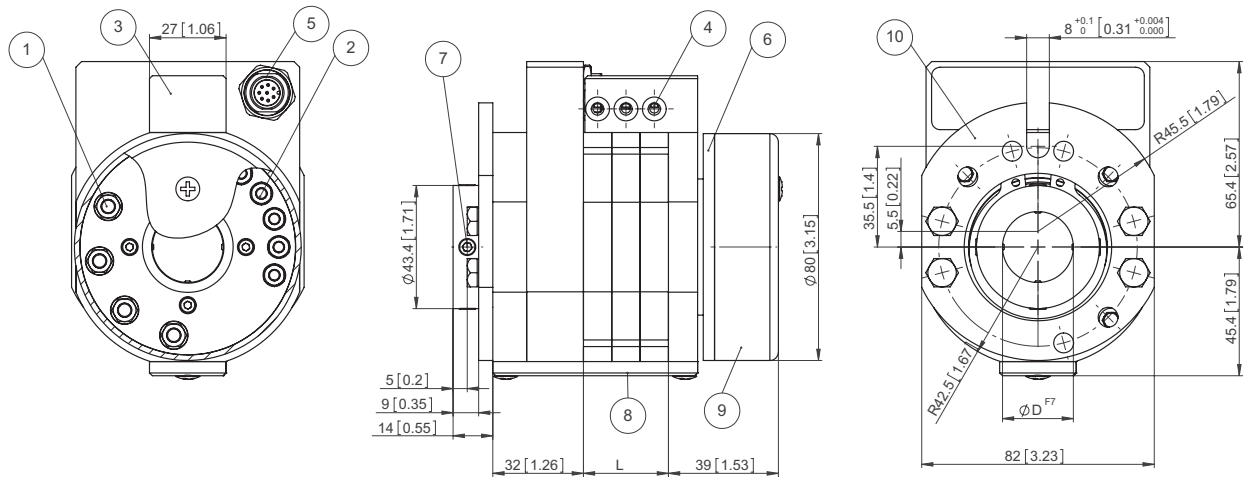

- 1 – Screw terminal M5 for load transmission
- 2 – Screw terminal M4 for signal transmission
- 3 – Terminal clamp for power without wire protection, with shock-hazard touch protection

- 4 – Wire lead-in for power possible on both sides
- 5 – Flange connector M12, A coded
- 6 – Rotating connection ring
- 7 – 4 x socket set screw DIN 914 M6

- 8 – Maintenance window
- 9 – Protective cover for connections
- 10 – Torque stop

Slip rings

Compact

Low-maintenance

SR060E



In general slip rings are used to transmit power, signals or data from a stationary to a rotating platform.

The SR060E is a compact, economical slip ring for up to 3 power and 2 signal transmissions.

New innovative contact materials ensure long service life and extremely low-maintenance operation. The round shape with smooth surfaces and high protection level allows easy cleaning.

Compact

- Dimensions 60 x 98 mm.
- Can be used as a pair starting from just 60 mm shaft distance of the sealing rollers.
- Various component configurations for the transmission paths, max. 3 x load and 2 x signal transmission.
- Easily accessible connections.
- Load current up to 20 A.

Low-maintenance

- Maintenance cycles only every 100 million revolutions.
- No contact oil required.
- Easy cleaning – high protection level IP64.

Applications for slip rings

Flowpack and blister packaging machines, robots and handling equipment, rotary tables

Order code

for standard versions

SR060E - **XX** - **X** - **X** - **XX** **2** - **V100**

Type

a

b

c

d

e

f

g

a *Hollow shaft*

20 = ø 20 mm [0.79"]
 21 = ø 21 mm [0.83"]
 22 = ø 22 mm [0.87"]
 24 = ø 24 mm [0.94"]
 25 = ø 25 mm [0.98"]
 (other diameters on request)

b *Number of signal / data channels*
 0 or 2

c *Number of load channels*
 0, 2 or 3

d *Max. load current*
 0 = no load channels
 1 = 16 A, 240 V AC/DC
 2 = 20 A, 240 V AC/DC

e *Contact material signal / data channels*
 0 = no signal / data channels
 3 = silver / precious metal

f *Protection*
 2 = IP64

g *Version number (options)*
 V100 = without option
 > V100 = option on request

Technical data

Hollow shaft diameter	up to max. ø 25 mm [0.98"]
Voltage/current loading	
load channels	240 V AC/DC, max. 16 A
signal / data channels	240 V AC/DC, max. 20 A (order option 2) 48 V AC/DC, max. 2 A
Contact resistance	
load channels	≤ 1 Ohm (dynamic) ¹⁾
signal / data channels	≤ 0.1 Ohm (silver / precious metal) ²⁾
Insulation resistance	10 ³ MOhm (at 500 V DC)
Dielectric strength	1000 V eff. (60 sec.)
Speed max.	500 min ⁻¹
Torque	< 0,2 Nm

Service life	typ. 500 million revolutions (at room temperature) depends on installation position
Maintenance cycles	first maintenance after 50 million revolutions, all further maintenance intervals after 100 million revolutions
Maintenance	contact oil not required
Material pairing	
load channels	copper / bronze
signal / data channels	silver / precious metal
Operating temperature	0°C ... +75°C [+32°F ... +167°F]
Protection acc. to EN 60529	IP64

1) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.


2) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.

Slip rings

Compact **Low-maintenance** **SR060E**

Dimensions

Dimensions in mm [inch]

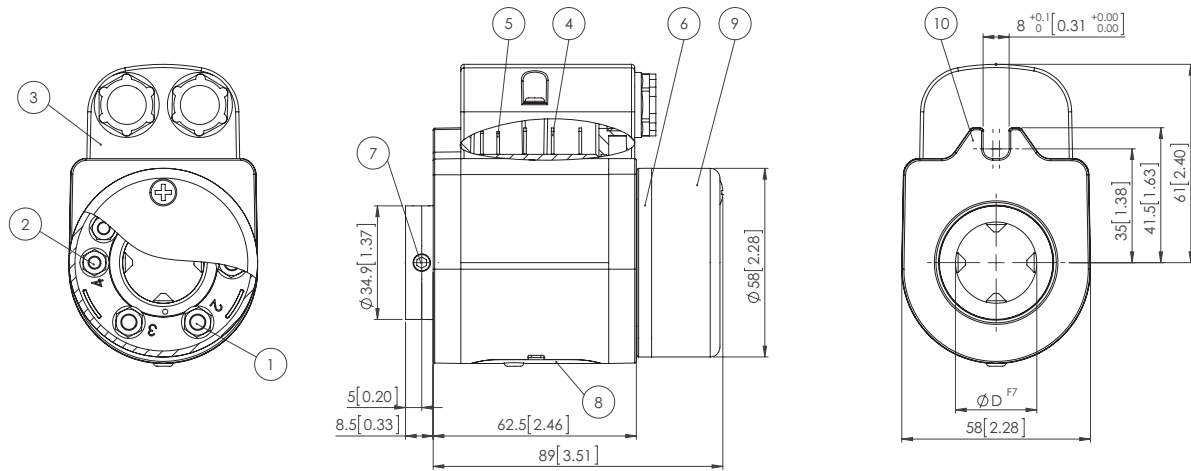

- | | | |
|-----------------------------------------------------------------------------------|-------------------------------------------------|--------------------------------------|
| 1 – Screw terminal M5 for load transmission | 4 – Flat pin connection for load transmission | 8 – Maintenance window |
| 2 – Screw terminal M4 for signal transmission | 5 – Flat pin connection for signal transmission | 9 – Protective cover for connections |
| 3 – Protective cover for the stator connections with screwed assembly (only IP64) | 6 – Rotating connection ring | 10 – Torque stop |
| | 7 – 4 x socket set screw DIN 914 M6 | |

Slip rings

Three chamber system	Ethernet transmission	SR120
-----------------------------	------------------------------	--------------



In general slip rings are used to transmit power, signals or data, pneumatic and hydraulic, from a stationary to a rotating platform.

The transmission between the stator and rotor takes place via sliding contacts and is extremely reliable.

The slip ring SR120 is ideal for applications requiring high transmission rates. The three chamber system allows parallel transmission of signals, load and data up to 100 Mbit/s.

Rugged

- Reliable operation in harsh environments.
- Rugged metal housing.
- High protection level IP64.

Flexible

- Fast and easy installation.
- Modular construction.
- Wide variety of connector and cable connections.

Reliable with the three chamber system

- Reliable thanks to interference-proof transmission.
- Transmission of Ethernet, signal, load, pneumatics and hydraulics.
- Innovative contact technology, low-maintenance and durable.
- Fieldbus or Ethernet up to 100 Mbit/s.
- UL approval in preparation.

Application areas for slip rings

Industrial automation, bottling plants, labelling machines, rotary tables, ...

Order code

for standard versions

SR120 - **XX** - **XX** - **XX** - **XX** - **X0X2** - **V100**
Type a b c d e f g h i

a Type of mounting

- 01 = flange mounting, rotor connections radial
- 02 = flange mounting, rotor connections axial

b Number of Ethernet transmissions

- 00 = none
- 01 = Ethernet transmission up to 100 Mbit/s

c Module signal / data channels ¹⁾

- 00 = none
- 02 = 2 channels
- 04 = 4 channels
- 06 = 6 channels
- C0 = CANopen
- D0 = DeviceNet
- M0 = Modbus
- P0 = Profibus

d Module load channels ²⁾

- 00 = none
- 02 = 2 x load
- 04 = 4 x load
- 06 = 6 x load
- L3 = 3 x load + ground PE
- L4 = 4 x load + ground PE

e Load channels max. load current

- 0 = none
- 1 = 230 V / 16 A
- 2 = 230 V / 25 A
- 3 = 400 V / 10 A
- 4 = 400 V / 20 A

f Type of connection

- 0 = cable ³⁾

g Central lead-through

- 0 = none
- 1 = air connection 1/4"
- 2 = air connection 1/2"
- 3 = air connection 3/8"
- A = central bore, inside diameter 20 mm
- B = central bore, inside diameter 15 mm

h Protection rating

- 2 = IP64

i Version number (options)

- V100 = without options
- >V100 = options on request, e.g.:
 - > 20 channels
 - other types of mounting
 - other types of connection (cable, connector, ...)
 - hydraulics connection
 - protection level IP65
 - stainless-steel housing

1) Additional signal / data channels on request (option)
 e.g. C2 = CAN module expansion with 2 additional channels
 Connection lines for CAN and signal transmission separated on stator and rotor side.

2) Additional load channels on request (option).

3) Except Ethernet channel (M12 connector).

Slip rings

Three chamber system	Ethernet transmission	SR120
Connection technology		Order no.
Cordset, pre-assembled	M12 male connector with external thread, 4-pin 2 m [6.56'] PUR cable	05.00.6031.4411.002M
Connector, self-assembly (straight)	M12 male connector with external thread, 4-pin	05.WASCSY4S
Industrial Ethernet - cable	PUR electronic cable	05.00.6031.1111.XXXM ¹⁾




Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data			
Overall length	dep. on the number of transmission paths		
Type of connection (stator and rotor)	load	cable 2 m [6.56']	
	signal / data	cable 2 m [6.56']	
	Ethernet	M12 connector 4-pin, D coded	
Material pairing	load	copper / bronze	
	signal / data	silver / precious metal	
	Ethernet	silver / precious metal	
Voltage/current loading	load channels	order option 1	230 V AC/DC, max. 16 A, 50/60 Hz
		order option 2	230 V AC/DC, max. 25 A, 50/60 Hz
		order option 3	400 V AC/DC, max. 10 A, 50/60 Hz
		order option 4	400 V AC/DC, max. 20 A, 50/60 Hz
	signal channels		48 V AC/DC, max. 2 A
Contact resistance	load channels	≤ 1 Ohm (dynamic) ²⁾	
	signal / data channels	≤ 0,1 Ohm (silver / precious metal) ³⁾	
Insulation resistance	10 ³ MOhm, at 500 V DC		
Dielectric strength	1000 V eff. (60 sec.)		

Speed max. (signal / data channels)	300 min ⁻¹ (depends on installation position and numbers of channels)
Service life (signal / data channels)	typ. 500 million revolutions (at room temperature) depends on installation position
Maintenance cycles	maintenance free (if necessary all 100 million revolutions)
Maintenance	remove contact abrasion dust – do not use compressed air
Operating temperature	-35° ... +85°C [-31°F ... +185°F]
Protection acc. to EN 60529	max. IP64
Transmission paths	max. 20 (> 20 on request)

Air connection (media lead-through no. 1 - 3)	
Air pressure max.	10 bar (150 psi)
Vacuum max.	7 kPa (2" Hg)
Speed max.	300 min ⁻¹

Technology in detail

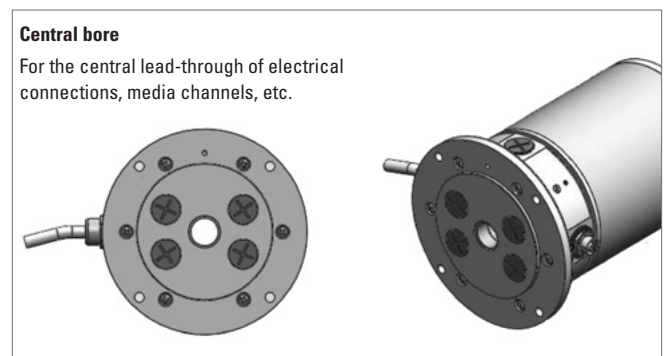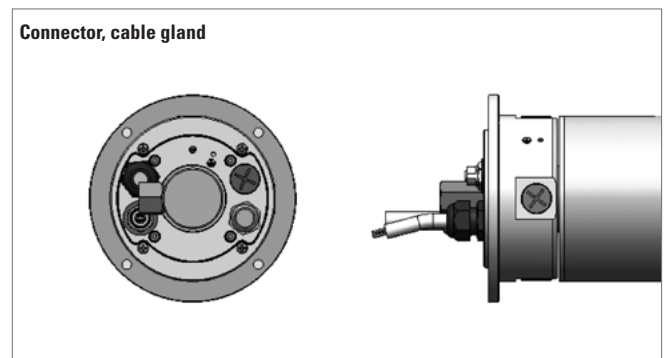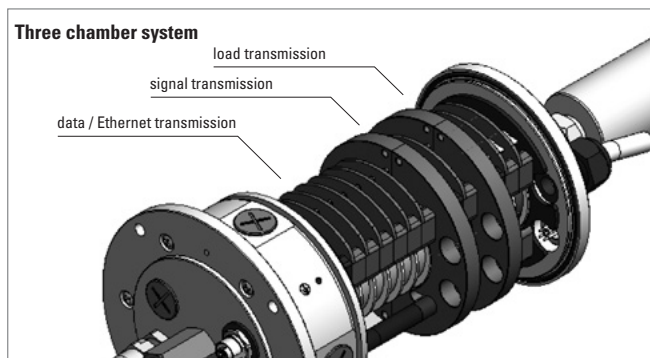

1) XXXX = cable length in meters (e.g. 10 m = 0010).
 2) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.
 3) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.

Slip rings

Three chamber system	Ethernet transmission	SR120
-----------------------------	------------------------------	--------------

Terminal assignment


M12 connector, 4-pin					
Signal:	Transmit data +	Receive data +	Transmit data -	Receive data -	
Abbreviation:	TxD+	RxD+	TxD-	RxD-	
Pin:	1	2	3	4	

Dimensions

Dimensions in mm [inch]

Standard version

Example: Type SR120-02-01-02-03-2002-V100

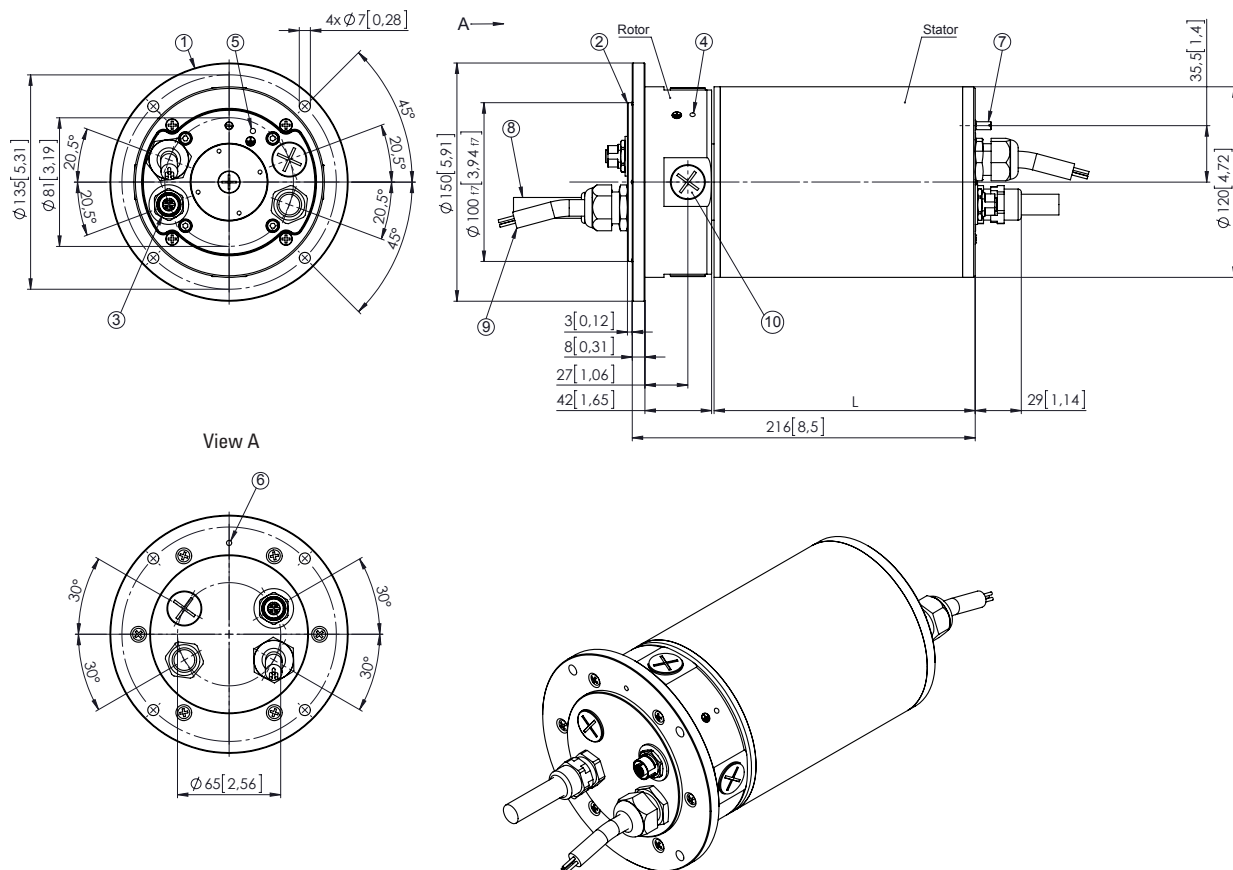

- | | | |
|----------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------|
| 1 – Mounting flange | 4 – Grounding PE (optional connectivity) | 8 – 2 m [6.56'] connecting cable for load transmission |
| 2 – Centering diameter | 5 – Grounding PE (optional connectivity) | 9 – 2 m [6.56'] connecting cable for signal transmission |
| 3 – M12 female connector (4-pin)
Ethernet (data transmission) (D-coded) | 6 – Grounding PE (optional connectivity) | 10 – Blind plug – depending on order code rotor
connections exit axially |
| | 7 – Anti-rotating-pin | |

Slip rings


Three chamber system **Ethernet transmission** **SR120**

Dimensions

Dimensions in mm [inch]

Version with media lead-through

Example: Type SR120-02-01-02-03-2032-V100

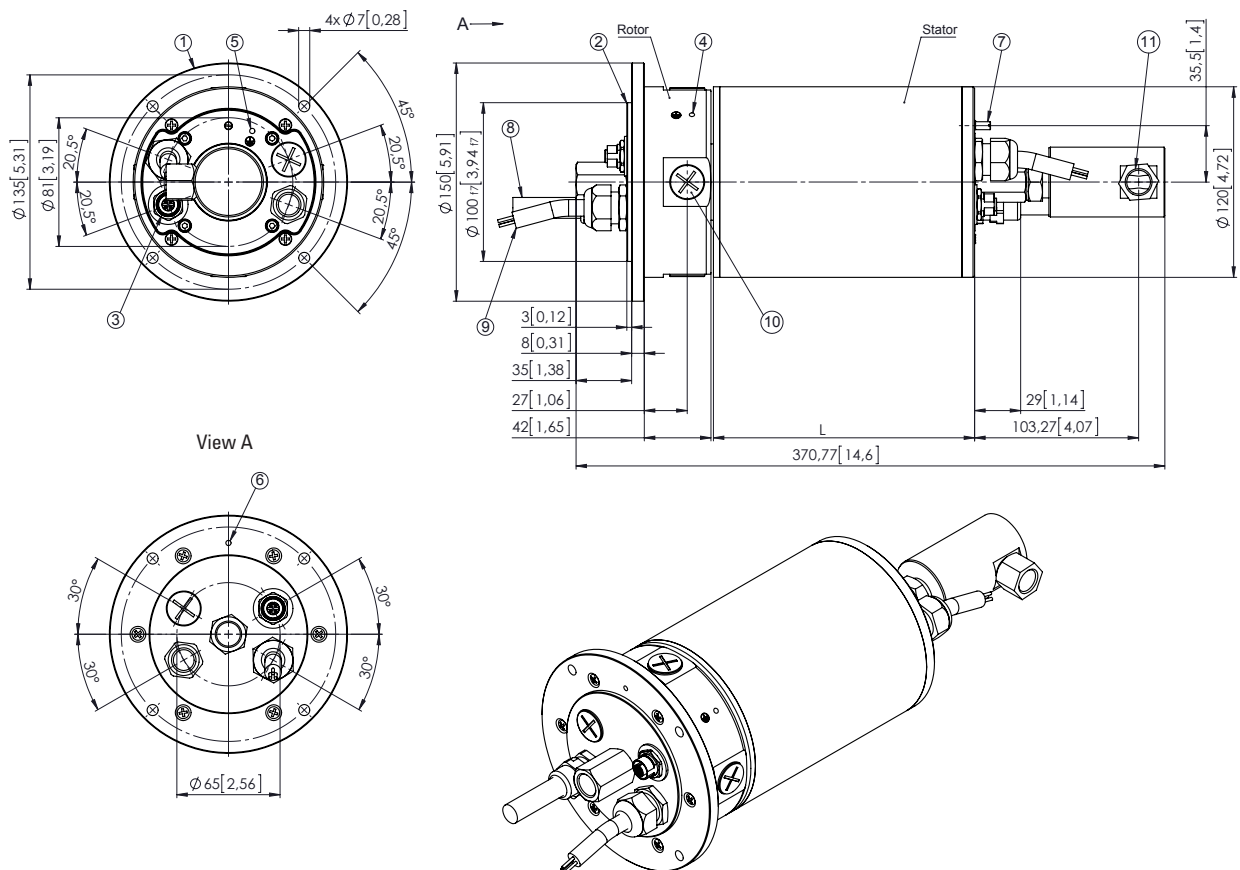

- | | | |
|----------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------|
| 1 – Mounting flange | 4 – Grounding PE (optional connectivity) | 8 – 2 m [6.56'] connecting cable for load transmission |
| 2 – Centering diameter | 5 – Grounding PE (optional connectivity) | 9 – 2 m [6.56'] connecting cable for signal transmission |
| 3 – M12 female connector (4-pin)
Ethernet (data transmission) (D-coded) | 6 – Grounding PE (optional connectivity) | 10 – Blind plug – depending on order code
connections exit axially |
| | 7 – Anti-rotating-pin | 11 – Media lead-through – depending on order code
connection thread G 1/2, G 1/4, G 3/8 |

Slip rings

Modular	Robust	SR160
----------------	---------------	--------------



In general slip rings are used to transmit power, signals or data, pneumatic and hydraulic, from a stationary to a rotating platform.

The transmission between the stator and rotor takes place via sliding contacts and is extremely reliable.

The SR160 is a robust modular slip ring. Its innovative contact technology ensures long maintenance-free operation. Connectors for signals/data and load allow fast and simple installation.

Rugged

- Reliable operation in harsh environments.
- Rugged metal housing.
- High protection level IP65.

Flexible

- Modular construction – individual product.
- Transmission of Ethernet, signal, load, pneumatics and hydraulics.

Reliable

- Pluggable connections – error prevention.
- Innovative contact technology, low-maintenance and durable.
- Transmission rate up to 100 Mbit/s.

Application areas for slip rings

Industrial automation, bottling plants, labelling machines, wear test machines, rotary tables ...

Order code

for standard versions

SR160 - **XX** - **XX** - **XX** - **XX** - **X1X2** - **V100**
Type a b c d e f g h i

a Type of mounting

- 01 = flange mounting, rotor connections radial
- 02 = flange mounting, rotor connections axial

b Number of Ethernet transmissions

- 00 = none
- 01 = Ethernet transmission up to 100 Mbit/s

c Module signal / data channels ¹⁾

- 00 = none
- 02 = 2 channels
- 04 = 4 channels
- 06 = 6 channels
- C0 = CANopen
- D0 = DeviceNet
- M0 = Modbus
- P0 = Profibus

d Module load channels ²⁾

- 00 = none
- 02 = 2 x load
- 04 = 4 x load
- 06 = 6 x load
- L3 = 3 x load + ground PE
- L4 = 4 x load + ground PE

e Load channels max. load current

- 0 = none
- 1 = 230 V / 16 A
- 2 = 230 V / 25 A
- 3 = 400 V / 10 A
- 4 = 400 V / 20 A

f Type of connection

- 1 = connector

g Central lead-through

- 0 = none
- 1 = air connection 1/4"
- 2 = air connection 1/2"
- 3 = air connection 3/8"
- A = central bore, inside diameter 20 mm
- B = central bore, inside diameter 15 mm

h Protection rating

- 2 = IP65

i Version number (options)

- V100 = without options
- >V100 = options on request, e.g.:
 - > 20 channels
 - other types of mounting
 - other types of connection (cable, connector, ...)
 - hydraulics connection
 - load current 50 A
 - stainless-steel housing

Connection technology

Order no.

Cordset, pre-assembled	M12 male connector with external thread, 4-pin 2 m [6.56'] PUR cable	05.00.6031.4411.002M
Connector, self-assembly (straight)	M12 male connector with external thread, 4-pin	05.WASCSY4S
Industrial Ethernet - cable	PUR electronic cable	05.00.6031.1111.XXXM ³⁾

Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

1) Additional signal / data channels on request (option)

e.g. C2 = CAN module expansion with 2 additional channels

Connection lines for CAN and signal transmission separated on stator and rotor side.

2) Additional load channels on request (option).

3) XXXX = cable length in meters (e.g. 10 m = 0010).

Slip rings

Modular	Robust	SR160
----------------	---------------	--------------



Technical data	
Overall length	dep. on the number of transmission paths
Type of connection (stator and rotor)	load M23 connector signal / data M12 connector Ethernet M12 connector 4-pin, D coded
Material pairing	load copper / bronze signal / data silver / precious metal Ethernet silver / precious metal
Voltage/current loading	
load channels	order option 1 230 V AC/DC, max. 16 A, 50/60 Hz order option 2 230 V AC/DC, max. 25 A, 50/60 Hz order option 3 400 V AC/DC, max. 10 A, 50/60 Hz order option 4 400 V AC/DC, max. 20 A, 50/60 Hz
signal channels	48 V AC/DC, max. 2 A
Contact resistance	load channels $\leq 1 \text{ Ohm (dynamic)}^{1)}$ signal / data channels $\leq 0.1 \text{ Ohm (silver / precious metal)}^{2)}$
Insulation resistance	$10^3 \text{ MOhm, at } 500 \text{ V DC}$
Dielectric strength	$1000 \text{ V eff. (60 sec.)}$
Speed max. (signal / data channels)	150 min^{-1} (depends on installation position and numbers of channels)
Service life (signal / data channels)	typ. 500 million revolutions (at room temperature) depends on installation position

Maintenance cycles	maintenance free (if necessary all 100 million revolutions)
Maintenance	Remove contact abrasion dust – do not use compressed air
Operating temperature	$-35^\circ \dots +85^\circ \text{C} [-31^\circ \text{F} \dots +185^\circ \text{F}]$
Protection acc. to EN 60529	max. IP65
Transmission paths	max. 20 (> 20 on request)

Air connection (media lead-through no. 1 - 3)	
Air pressure max.	10 bar (150 psi)
Vacuum max.	7 kPa (2" Hg)
Speed max.	150 min^{-1}

Slip rings

Technology in detail

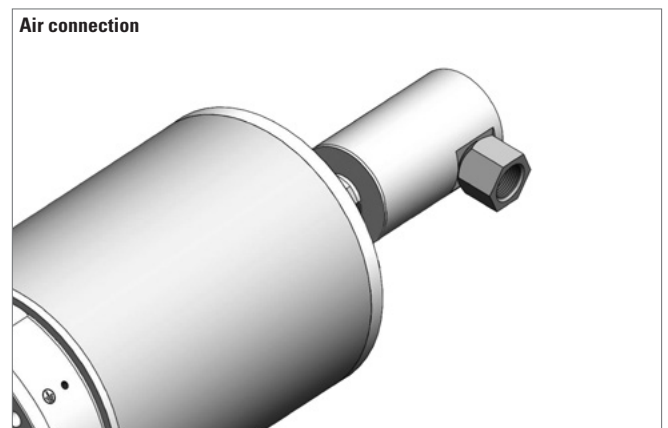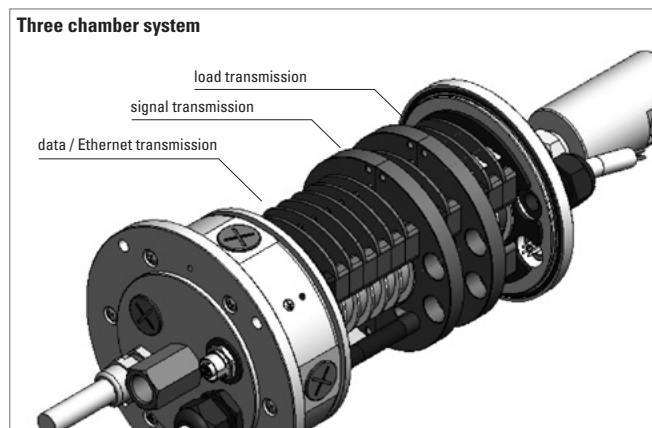

1) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.
 2) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.

Slip rings

Modular

Robust

SR160

Terminal assignment




M12 connector, 4-pin, EtherNet transmission						Stator IN	Rotor OUT			
Signal:	Transmit data +	Receive data +	Transmit data -	Receive data -		1 2 4 3	1 2 4 3			
Abbreviation:	TxD+	RxD+	TxD-	RxD-		D coded	D coded			
Pin:	1	2	3	4						
M12 connector, 5-pin, module Profibus						Stator IN	Rotor OUT			
Channel:	1	2	3	4	5	6	1 2 3 4			
Pin:	1	2	3	4	5	PH	B coded			
M12 connector, 5-pin, module DeviceNet, CANopen, Modbus						Stator IN	Rotor OUT			
Channel:	1	2	3	4	5	6	2 1 3 4			
Pin:	1	2	3	4	5	PH	A coded			
M12 connector, 8-pin, signal / data channels						Stator IN	Rotor OUT			
Channel:	1	2	3	4	5	6	7	8		2 3 4 5 6 7 8
Pin:	1	2	3	4	5	6	7	8		A coded
M23 connector, 6-pin, load channels						Stator IN	Rotor OUT			
Channel:	1	2	3	4	5	PE				2 1 3 4
Pin:	1	2	4	5	6	⊥	A coded	A coded		

Dimensions

Dimensions in mm [inch]

Standard version

Example: Type SR160-01-01-06-04-3132-V100

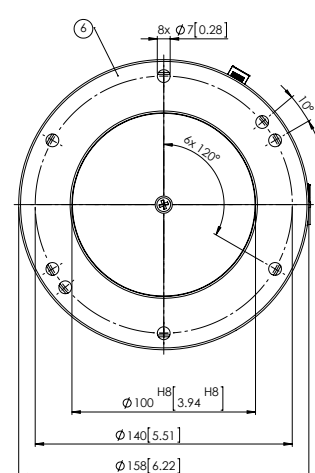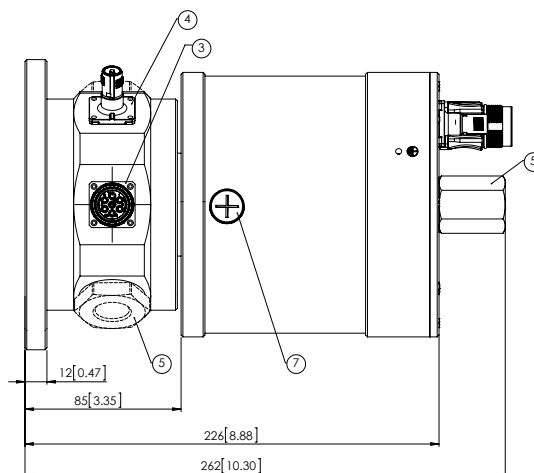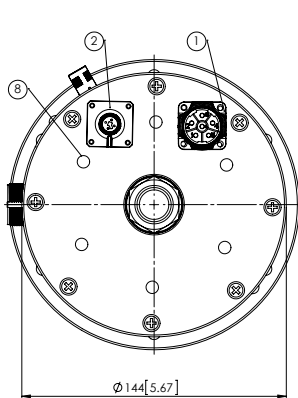

- 1 – Stator power connection, M23 connector
- 2 – Stator signal connection, M12 connector (coding depending on interface)
- 3 – Rotor power connection, M23 connector

- 4 – Rotor signal connection, M12 connector (coding depending on interface)
- 5 – Rotor media connection (optional)
- 6 – Mounting flange
- 7 – Maintenance opening (on both sides)

Slip rings

Modular	Robust, high current	SR250H
----------------	-----------------------------	---------------



In general slip rings are used to transmit power, signals or data, pneumatic and hydraulic, from a stationary to a rotating platform.

The transmission between the stator and rotor takes place via sliding contacts and is extremely reliable.

The slip ring SR250H transmits in parallel signals and data, as well as loads up to 80 A for high-power drives.

The robust modular construction and many different connection possibilities ensure flexible and reliable operation.

Slip rings



<p>Powerful</p> <ul style="list-style-type: none"> Reliable operation in harsh environments. Load transmission up to 80 A. High protection level up to IP67. <p>Flexible</p> <ul style="list-style-type: none"> Modular construction – individual product. Transmission of Ethernet, signal, load, pneumatics and hydraulics. 	<p>Reliable</p> <ul style="list-style-type: none"> Pluggable connections – error prevention. Innovative contact technology, low-maintenance and durable. Transmission rate up to 100 Mbit/s. <p>Application areas for slip rings</p> <p>Bottling plants, labelling machines, wear test machines, rotary transfer machines, construction machinery, cranes.</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Configuration – Options		
<p><i>Type of mounting</i></p> <ul style="list-style-type: none"> flange mounting (s. dimensional drawing) hollow shaft up to 30 mm (s. dimensional drawing) other types of mounting on request <p><i>Signal / data channels</i></p> <ul style="list-style-type: none"> Ethernet transmission PT100, 2-wire PT100, 4-wire thermocouples CANopen DeviceNet Modbus Profibus switching signals other signal- /data channels on request 	<p><i>Load channels</i></p> <ul style="list-style-type: none"> 10 A, 400 V AC/DC 16 A, 240 V AC/DC 20 A, 400 V AC/DC 25 A, 240 V AC/DC 63 A, 500 V AC/DC 80 A, 500 V AC/DC other load channels on request <p><i>Central lead-through</i></p> <ul style="list-style-type: none"> air connection 1/4" air connection 1/2" air connection 3/8" hydraulics connection 1/2" hydraulics connection 3/8" central bore, inside diameter 15 mm or 20 mm other central lead-throughs on request 	<p><i>Type of connection (stator and rotor)</i></p> <ul style="list-style-type: none"> M23 connector (load, signal) M12 connector (depending on the interface) RJ45 connector (Ethernet) SUB-D connector cable (load, signal) connector assembled on the cable other connection types, such as for example assembled motor or servo cables, on request <p><i>Protection rating</i></p> <ul style="list-style-type: none"> IP50 IP64 IP65 IP67

Slip rings

Modular	Robust, high current	SR250H
----------------	-----------------------------	---------------

Technology in detail

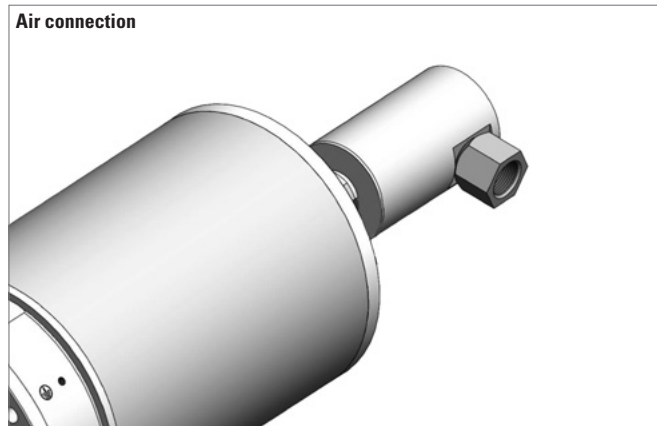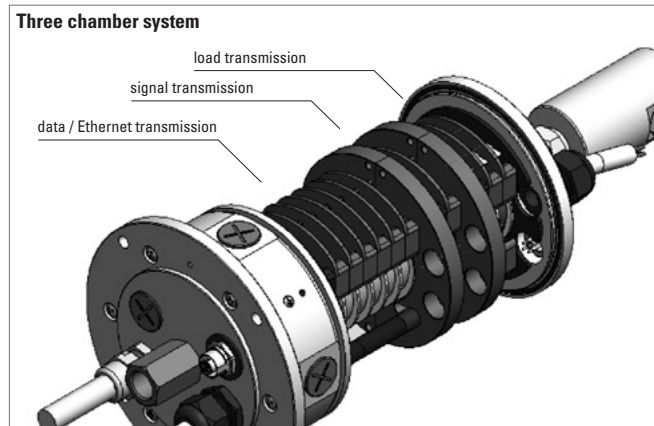

Applications



Technical data							
Overall length	dep. on the number of transmission paths						
Material pairing	<table border="0"> <tr> <td>load</td> <td>copper / bronze</td> </tr> <tr> <td>signal / data</td> <td>silver / precious metal</td> </tr> <tr> <td>Ethernet</td> <td>silver / precious metal</td> </tr> </table>	load	copper / bronze	signal / data	silver / precious metal	Ethernet	silver / precious metal
load	copper / bronze						
signal / data	silver / precious metal						
Ethernet	silver / precious metal						
Contact resistance	<table border="0"> <tr> <td>load channels</td> <td>$\leq 1 \text{ Ohm (dynamic)}^1$</td> </tr> <tr> <td>signal / data channels</td> <td>$\leq 0.1 \text{ Ohm (silver / precious metal)}^2$</td> </tr> </table>	load channels	$\leq 1 \text{ Ohm (dynamic)}^1$	signal / data channels	$\leq 0.1 \text{ Ohm (silver / precious metal)}^2$		
load channels	$\leq 1 \text{ Ohm (dynamic)}^1$						
signal / data channels	$\leq 0.1 \text{ Ohm (silver / precious metal)}^2$						
Insulation resistance	$10^3 \text{ MOhm, at } 500 \text{ V DC}$						
Dielectric strength	$1000 \text{ V eff. (60 sec.)}$						
Speed max. (signal / data channels)	150 min^{-1} (depends on installation position and numbers of channels)						

Service life (signal / data channels)	typ. 500 million revolutions (at room temperature) depends on installation position
Maintenance cycles	maintenance free (if necessary all 100 million revolutions)
Maintenance	Remove contact abrasion dust – do not use compressed air
Operating temperature	$-35^\circ\text{C} \dots +85^\circ\text{C} [-31^\circ\text{F} \dots +185^\circ\text{F}]$
Protection acc. to EN 60529	max. IP67
Transmission paths	on request

1) Voltage measurement, ambient temperature, DC series connection, ohmic load, min. 4 A test current.
 2) 2-wire resistance measurement, ambient temperature, 6.5-digit digital multimeter or similar, values without testing cable.


Slip rings

Modular	Robust, high current	SR250H
----------------	-----------------------------	---------------


Dimensions

Dimensions in mm [inch]

Example:

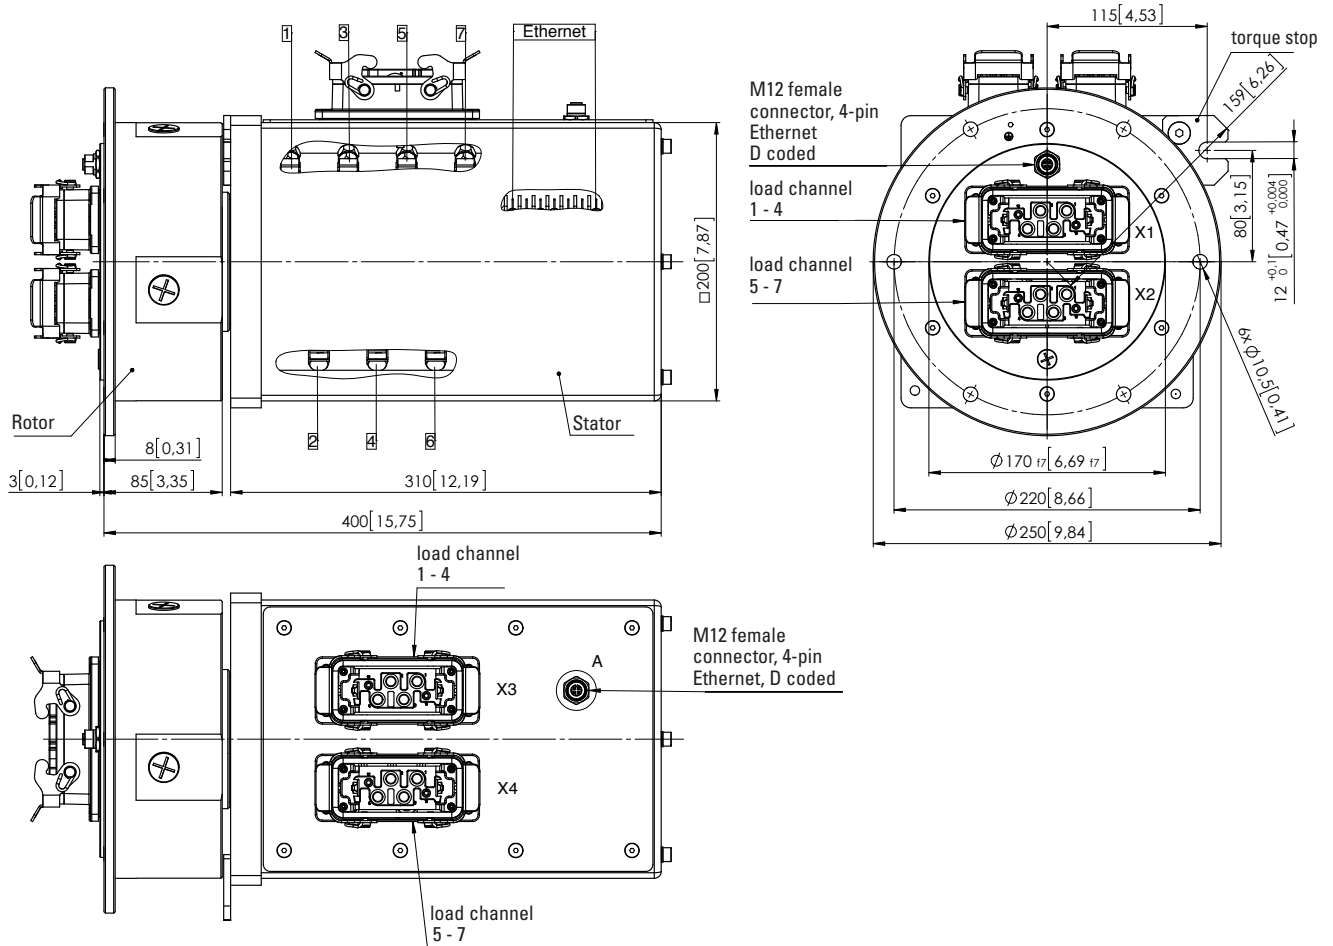

Slip rings

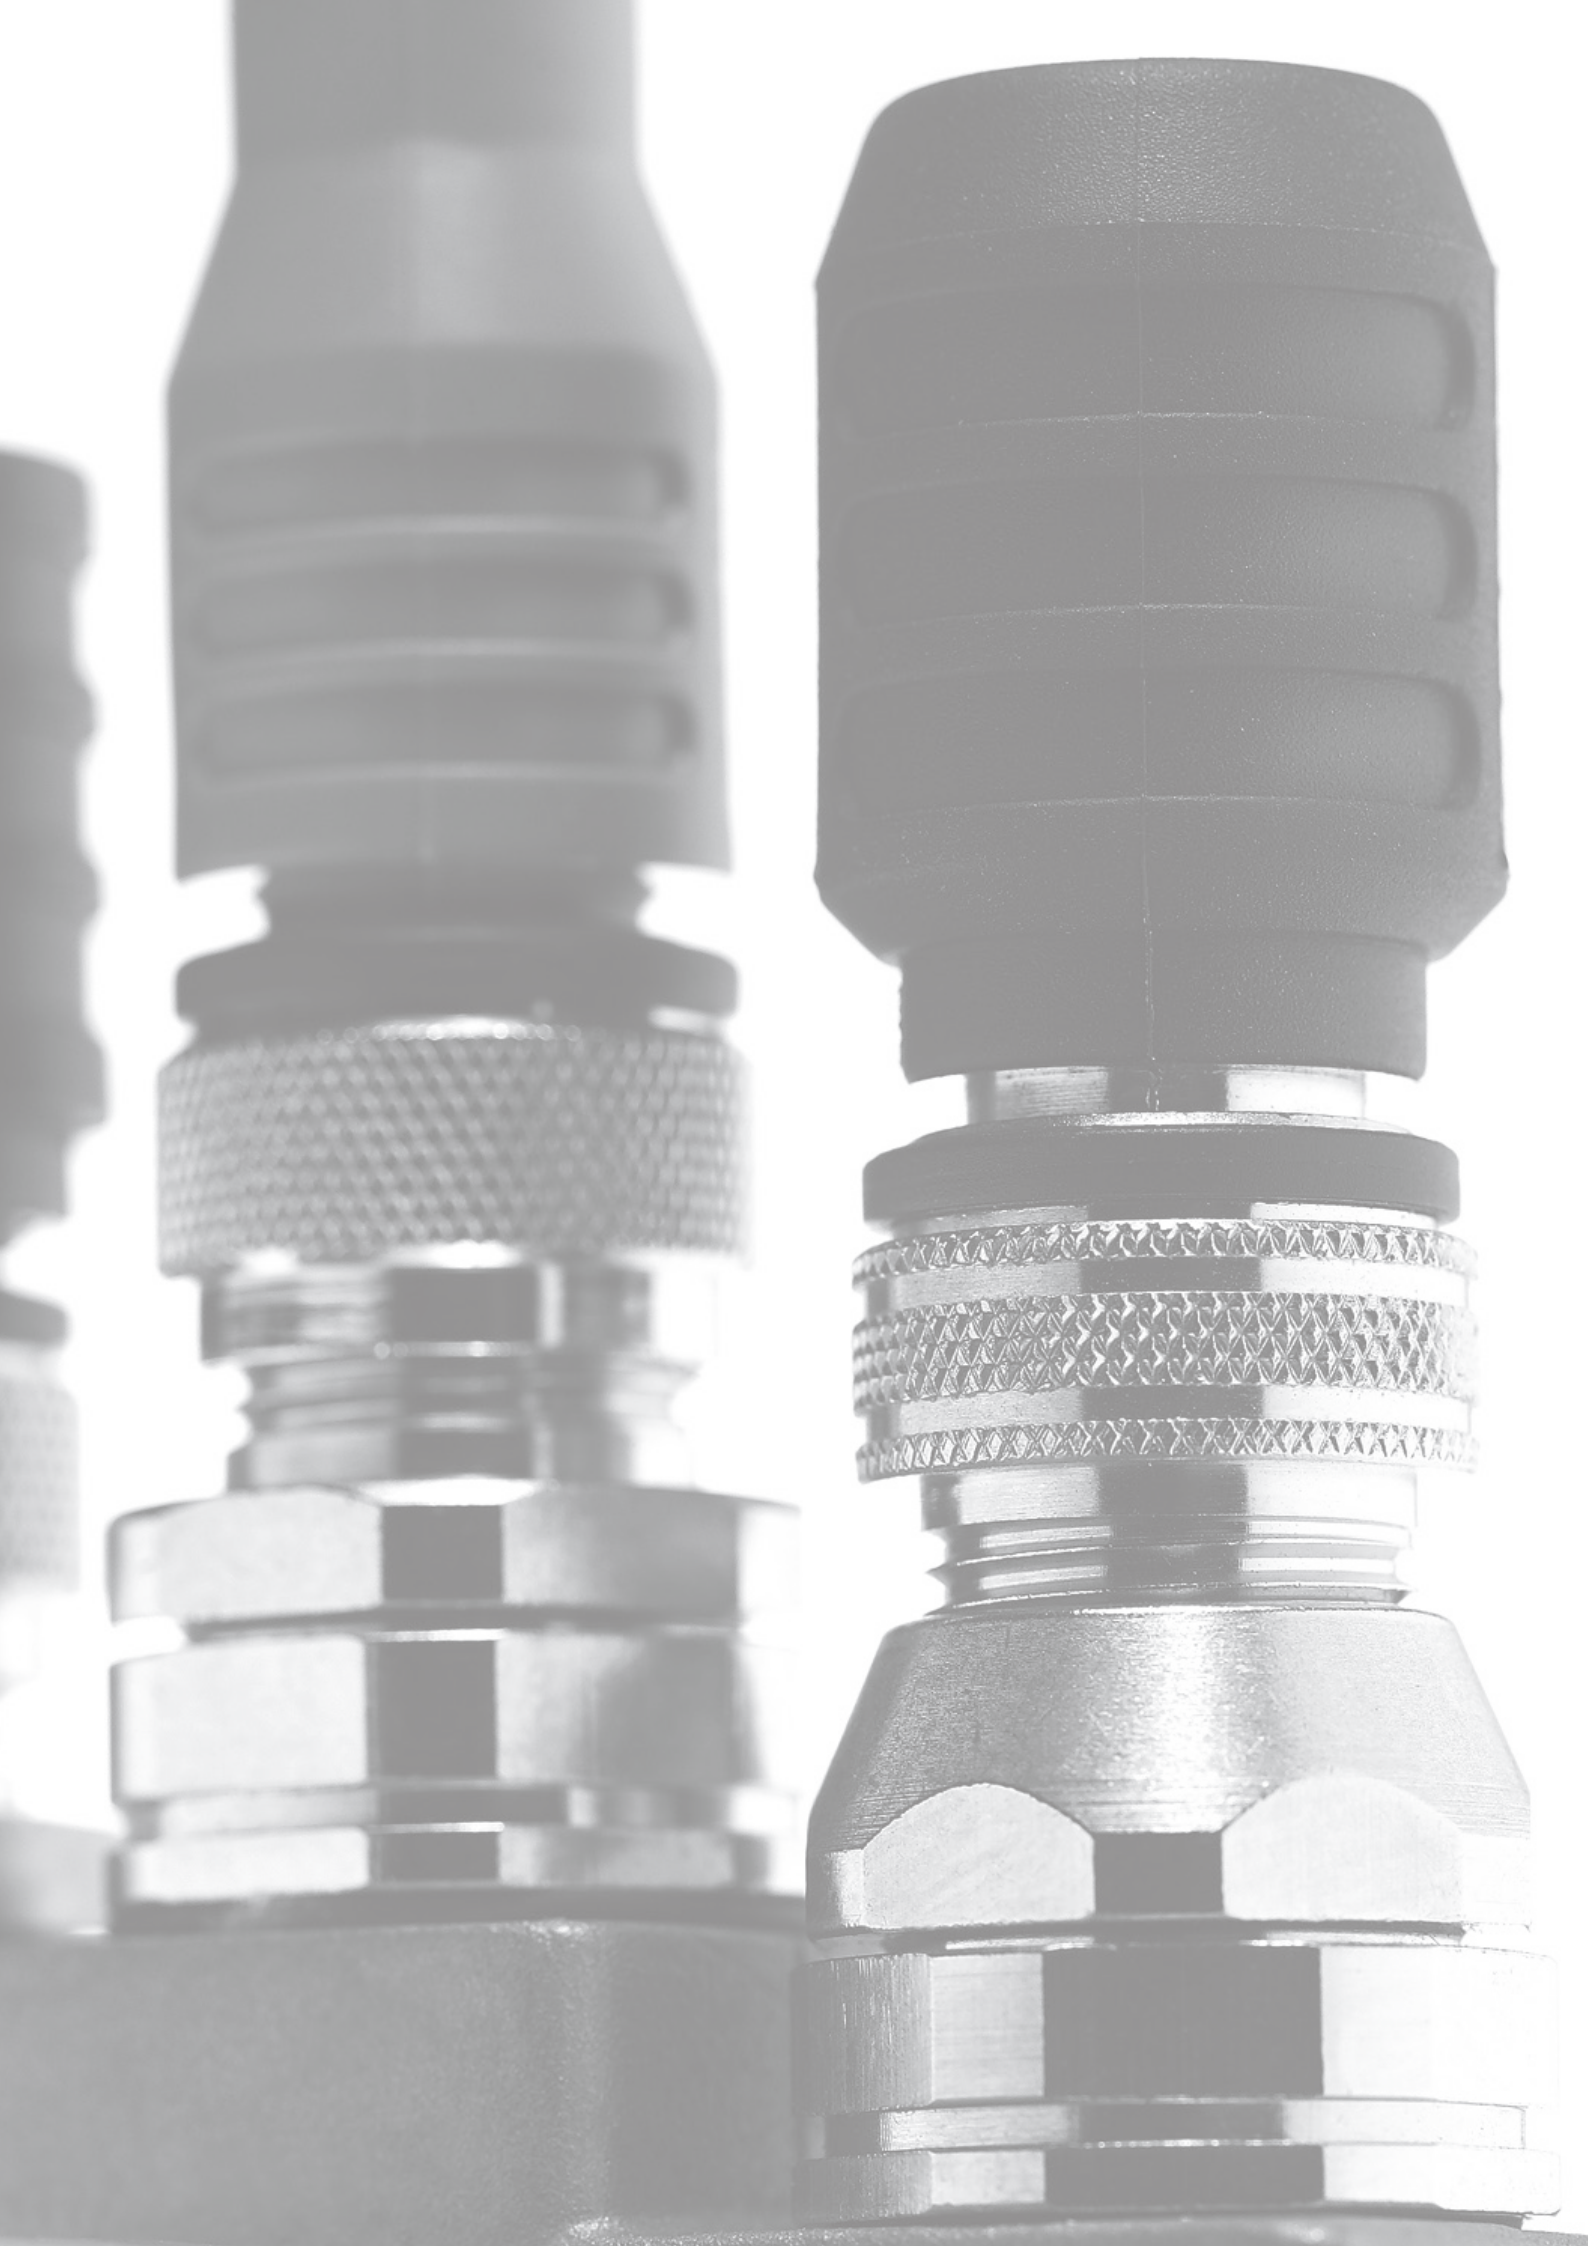

Connection technology

		Page
Cable	Unprepared, cut to length	36
M12 connection technology	Connectors, self-assembly	37
	Cordsets, pre-assembled	38

The idea behind our Connection Technology System







Connection Technology from Kübler = System Safety!

All the products in the Connection Technology section have been tested and approved with the relevant compatible Kübler sensors.

They ensure the full functionality and high signal quality of our sensors.

Your benefit:

- Elimination of connection errors
– no laborious fault finding
- Optimal shielding
– avoids EMC problems
- Shorter installation times
– saves time, cuts costs
- No time-consuming search for the right connector or cable
– saves time, eliminates errors

Cable		Unprepared, cut to length			
Industrial Ethernet - cable			Order no.		
PUR electronic cable  	Cross section	2 x 2 x 0.34 mm ² [AWG22]	 Conformance tested  EtherNet/IP [®]	05.00.6031.1111.XXXM ¹⁾	
	Permanent working temperature range	flexible installation			-30°C ... +70°C [-22°F ... +158°F]
		secure installation			-40°C ... +80°C [-40°F ... +176°F]
	Bending radius	flexible installation			min. 50 mm [1.97"]
		secure installation			min. 25 mm [0.98"]
Cable diameter		approx. 4.8 mm ±0.2 mm			

1) XXXX = cable length in meters (e.g. 10 m = 0010)

Connection technology

M12 connection technology Connectors, self-assembly



4 pin Order no.

Male connector with external thread
D coded, straight

Housing: metal, IP67



screw connections,
 for cable \varnothing 4 ... 9 mm [0.16 ... 0.35"]



EtherCAT
 Conformance tested

PROFI
NET

EtherNet/IP

05.WASCSY4S



5 pin Order no.

Female connector with coupling nut
A coded, straight

Housing: metal, IP67



screw connections,
 for cable \varnothing 6 ... 8 mm [0.24 ... 0.32"]



05.CMB 8181-0

Connection
 technology

Connection technology

M12 connection technology

Cordsets, pre-assembled

With connector, 4 pin

Working temp. -30°C ... +80°C [-22°F ... +176°F]



Order no.

Male connector with external thread
single-ended
D coded, straight

Cable: PUR, 2 x 2 x 0.34 mm² [AWG22]
Housing: metal / plastic, IP67



Port A (1) and B (2)



EtherCAT
Conformance tested

PROFI
NET

EtherNet/IP

*cable length*¹⁾

standard cable length 2 m [6.56']
(available from 1 piece) 5 m [16.40']
10 m [32.81']
15 m [49.21']

05.00.6031.4411.002M
05.00.6031.4411.005M
05.00.6031.4411.010M
05.00.6031.4411.015M

other cable lengths
(minimum order quantity 4 pieces)

05.00.6031.4411.0xxM
xx = length in meters:
1, 3, 8, 12, 20, 25, 30

Terminal assignment

Pin Stift:	1	2	3	4
Litzenfarbe:	YE	OG	WH	BU



With connector, 8 pin

Working temp. -30°C ... +80°C [-22°F ... +176°F]

Order no.

Female connector with coupling nut +
single-ended
A coded, straight

Cable: PVC, 8 x 0.25 mm² [AWG23]
Housing: metal / plastic, IP67



*cable length*¹⁾

standard cable length 2 m [6.56']
(available from 1 piece) 5 m [16.40']
10 m [32.81']
15 m [49.21']

05.00.6041.8211.002M
05.00.6041.8211.005M
05.00.6041.8211.010M
05.00.6041.8211.015M

other cable lengths
(minimum order quantity 4 pieces)

05.00.6041.8211.0xxM
xx = length in meters:
1, 3, 8, 12, 20, 25, 30

Terminal assignment

Pin female contacts:	1	2	3	4	5	6	7	8	PH ²⁾
Wire color:	WH	BN	GN	YE	GY	PK	BU	RD	PH ²⁾

1) Other cable lengths on request.
2) Shield on housing.



Addresses

	Page
Kübler worldwide	42
Contact partners in Germany	44



Kübler worldwide

Kübler Group



Fritz Kübler GmbH
Germany
Phone +49 7720 3903-0
info@kuebler.com
www.kuebler.com



Fritz Kübler SARL
France
Phone +33 3 89 53 45 45
info@kuebler-sarl.com
www.kuebler.fr



Kübler Italia S.r.l.
Italy
Phone +39 026 423 345
info@kuebler.it
www.kuebler.it



Kübler Österreich
Austria
Phone +43 720 510459
at@kuebler.com
www.kuebler.com



Kubler SP. Z O.O.
Poland
Phone +48 61 84 99 902
info@kubler.pl
www.kubler.pl



Kübler Turkey Otomasyon Ticaret Ltd. Sti.
Turkey
Phone +90 216 999 9791
cengizhan.temurcin@kuebler.com
www.kuebler.com.tr



Kuebler (Beijing) Automation Trading Co. Ltd.
China
Phone +86 10 8471 0818
beijing@kuebler.com
www.kuebler.com



Kuebler Automation India Pvt. Ltd.
India
Phone +91 99 7065 5599
Phone +91 20 6790 1-200 / 230 / 214 / 202
info@kuebler.in
www.kuebler.in



Kuebler Korea (by F&B)
South Korea
Phone +82 51 319 12 30
fnb@kuebler.co.kr
www.kuebler.kr



Kuebler Inc.
USA
Phone +1 704-705-4710
Toll Free +1-855-KUEBLER (583-2537)
usa@kuebler.com
www.kuebler.com/usa

Europe

Austria
Kübler Österreich
Deutsch Bieling 35
A-7522 Heiligenbrunn
Phone +43 720 510459
Fax +43 720 510456
at@kuebler.com
www.kuebler.com

Belarus
FEK Company
Pushkin Ave., 29B
BY-220015 Minsk
Phone +375 17 202 68 00
Fax +375 17 202 68 01
turck@fek.by
www.fek.by

Belgium
Turck Multiprox N.V.
Lion d'Orweg 12
B-9300 Aalst
Phone +32 53 76 65 66
Fax +32 53 78 39 77
mail@multiprox.be
www.multiprox.be

Bulgaria
Sensomat Ltd.
Ul.Stratsin 4, vh.A, app.1
P.O.B. 116
BG-9300-Dobrich
Phone +359-888 403 570
Fax +359-58-603 033
info@sensomat.info
www.sensomat.info

Croatia
Bering d.o.o.
Ulica Pri rampi 2
HR-49210 Zabok
Phone +385 49 221 182
Fax +385 49 223 658
bering@bering.hr
www.bering.hr

Czech Republic
TURCK s.r.o.
Na Brně 2065
CZ-500 06 Hradec Králové
Phone +420 - 4 95 51 87 66
Fax +420 - 4 95 51 87 67
turck-cz@turck.com
www.turck.cz

Denmark
Hans Følsgaard A/S
Theilgaard's Torv 1
DK-4600 Køge
Phone +45 43 20 86 00
Fax +45 43 96 88 55
hf@hf.net
www.hf.net

Estonia
Standel AS
Kiisa 8
EE-11313 Tallinn
Phone +372 6 558 180
Fax +372 6 558 179
standel@standel.ee
www.standel.ee

Finland
Sähkölehto Oy
Holkitie 14
FIN-00880 Helsinki
Phone +358 9 774 6420
Fax +358 9 759 1071
office@sahkolehto.fi
www.sahkolehto.fi

France
Fritz Kübler S.à.r.l.
Compteurs et codeurs
industriels
2 rue de Grande Bretagne
F-68310 Wittelsheim
Phone +33 3 89 53 45 45
Fax +33 3 89 53 66 77
info@kuebler-sarl.com
www.kuebler.fr

Germany
Fritz Kübler GmbH
Schubertstrasse 47
D-78054
Villingen-Schwenningen
Phone +49 7720 3903-0
Fax +49 7720 21564
info@kuebler.com
www.kuebler.com

Great Britain
OEM Automatic Ltd
Whiteacres, Cambridge Road
Whetstone
GB-Leicester LE8 6ZG
Phone +44 116 284 99 00
Fax +44 116 284 17 21
information@uk.oem.se
www.oem.co.uk

Greece
Industrial Automation Systems
L.J. Skourgialos
241, El. Venizelou Ave.
GR-176 73 Kallithea - Athens
Phone +30 210 9510260
Fax +30 210 9511048
info@ias.gr
www.ias.gr

Hungary
Kvalix Automatika Kft.
Kiss Ernő u. 1-3
H-1046 Budapest
Phone +36 1 272 2242
Fax +36 1 272 2244
info@kvalix.hu
www.kvalix.hu

Iceland
Reykjafell Ltd.
Skipholti 35
IS-125 Reykjavik
Phone +354 5 88 60 00
Fax +354 5 88 60 88
reykjafell@reykjafell.is
www.reykjafell.is

Ireland
Kübler Group
Fritz Kübler GmbH
Schubertstr. 47
D-78054
Villingen-Schwenningen
Phone +49 7720 3903-0
Fax +49 7720 21564
info@kuebler.com
www.kuebler.com

Italy
• Encoders:
Kübler Italia Srl.
Viale Sarca, 96
I-20125 Milano MI
Phone +39 026 423 345
Fax +39 026 611 3843
info@kuebler.it
www.kuebler.it

• Counters and process
devices:
MAS AUTOMAZIONE S.R.L.
Via G. Galilei 20
I-20090 Segrate (MI)
Phone +39 02 26 92 20 90
Fax +39 02 26 92 16 87
info@masautomazione.it
www.masautomazione.it

Lithuania
UAB FEK Elektronika
Naugarduko 91-415
LT-03160, Vilnius, Lietuva
Phone +370 700 01760
Phone +3705 2133603
Fax +3705 2159198
info@fek.lt
www.fek.lt

Netherlands
Duranmatic B.V.
Robijn 800
NL-3316 KE Dordrecht
Phone +31 78 631 05 99
Fax +31 78 613 11 33
info@duramatic.nl
www.duramatic.nl

Norway
ELTECO AS
Floodmyrveien 24
N-3946 Porsgrunn
Phone +47 35 56 20 70
Fax +47 35 56 20 99
firmapost@elteco.no
www.elteco.no

Poland
Kubler Sp. z o.o.
ul. Dabrowskiego 441
PL-60-451 Poznan
Phone +48 61 849 99 02
Fax +48 61 849 99 03
info@kubler.pl
www.kubler.pl

ASTAT sp. z o.o.
ul. Dabrowskiego 441
PL-60-451 Poznan
Phone +48 61 848 8871
Fax +48 61 848 8276
info@astat.com.pl
www.astat.com.pl

• Electronic counters and
process displays:
IMPOL-1 Sp.J.
ul. Krakowiaków 103
PL-02-255 Warszawa
Phone +48 22 886 56 02
Fax +48 22 886 56 04
biuro@impol-1.pl
www.impol-1.pl

• Encoders:
OEM AUTOMATIC Sp. z o.o.
ul. Działkowa 121 A
PL-02-234 Warszawa
Phone +48 22 863 27 22
Fax +48 22 863 27 24
info@pl.oem.se
www.oemautomatic.pl

Portugal
Kübler Group
C/Bretón de los Herreros 43 3 A
28003 Madrid, Spanien
Phone +34 91 1516773
Mobil +34 630 976 107
alejandroperezmanrique@kuebler.com
www.kuebler.com

vLA2P – Tecnologias de Auto-
mação, LDA
Rua Teófilo Braga, 156 A
Esrit. F – Edifício S. Domingos
Cabeço do Mouro
PT-2785 - 122 S. Domingos de Rana
Phone +351 21 444 70 70
Fax +351 21 444 70 75
la2p@la2p.pt
www.la2p.pt

Romania
Syscom 18 SRL
Calea Plevnei 139B, Sector 6
RO-060011 Bucharest
Phone +40 21 310 26 78
Fax +40 21 316 91 76
syscom@syscom18.com
www.syscom.ro

Russia
Servotechnica ZAO
Klara Isetkin str., 33/35
RUS-125130 Moscow
Phone +7 495 797 8866
Fax +7 495 450 0043
info@servotechnica.ru
www.servotechnica.ru

Slovakia
S.D.A. s. r. o.
Jána Bottu 4
SK-974 01 Banská Bystrica
Phone +421 48 472 34 11
Fax +421 48 472 343 69
sekretariat@s-d-a.sk
www.s-d-a.sk

Slovenia
Balluff d.o.o.
Livadna ulica 1
SLO-2204
Miklavž na Dravskem polju
Phone +386 2 6 29 03 00
Fax +386 2 6 29 03 02
senzorji.sb@siol.net
www.senzorji-sb.si

Spain
Kübler Group
C/Bretón de los Herreros 43 3 A
28003 Madrid, Spanien
Phone +34 91 1516773
Mobil +34 630 976 107
alejandroperezmanrique@kuebler.com
www.kuebler.com

Elion, S.A.
Farell, 5
E-08014 Barcelona
Phone +34 93 298 20 00
Fax +34 93 431 18 00
elion@elion.es
www.elion.es

Sweden
OEM AUTOMATIC AB
Dalagatan 4, Box 1011
S-57328 Tranås
Phone +46 75-242 4100
Fax +46 75-242 4119
info@aut.oem.se
www.oemautomatic.se

Switzerland
Fritz Kübler S.à.r.l.
2 rue de Grande Bretagne
F-68310 Wittelsheim
Phone +33 3 89 53 45 45
Fax +33 3 89 53 66 77
info@kuebler-sarl.com
www.kuebler.fr

① Kübler Italia Srl.
Viale Sarca, 96
I-20125 Milano MI
Phone +39 026 423 345
Fax +39 026 611 3843
info@kuebler.it
www.kuebler.it

② Fritz Kübler GmbH
Schubertstraße 47
D-78054 Villingen-Schwenningen
Phone +49 7720 3903-0
Fax +49 7720 21564
info@kuebler.com
www.kuebler.com

Turkey
Kübler Turkey Otomasyon
Ticaret Ltd. Sti.
Bahçelievler Mah.
Serpinti Sok.No:6 Kat:4
TR - 34893 Pendik/Istanbul
Phone +90 216 999 9791
Fax:+90 216 999 9784
cengizhan.temurcin@kuebler.com
www.kuebler.com

• System Integrator
ROBOSAN Otomasyon San.Tic. Ltd.
Robosan Plaza Bahçelievler Mah.
Serpinti Sok. No:6 Pendik
TR-34893 Pendik/Istanbul
Phone +90 216 340 39 70
Fax +90 216 340 39 64
info@robosan.com.tr
www.robosan.com.tr

• Encoders, process devices and
transmission technology:
Sanil Teknik
Elektrik San. ve Tic. Ltd. Sti.
Oğkumusca Caddesi
Tusak Sokak
No: 27/5 Karaköy
TR-34420 Istanbul
Phone +90 212 256 94 28
Fax +90 212 256 94 04
sanil@sanil.com.tr
www.sanil.com.tr

• Counters:
ERUZ Elektrik San. ve Tic. A.S.
Necatibey Caddesi
Sait Demirbag Han No.5 K.1
TR-34425 Istanbul
Phone +90 212 2 93 60 36
Fax +90 212 2 44 51 56
eruzelektrik@eruzelektrik.com.tr
www.eruzelektrik.com.tr

Ukraine
SV Altera Ltd.
4, Ivana Lapse blvd, Kyiv,
UA-03680 Ukraine
Phone +38 044 496-18-88
Fax +38 044 496-18-18
office@sv-altera.com
www.svaltera.ua

America, Asia, Australia, Africa

Catalog distributors: (Europe)

Austria
Farnell GmbH
Birkenstrasse 2
A-5300 Salzburg/Hallwang
Phone +43 662 - 218 06 80
Fax +43 662 - 218 06 70
verkauf.at@farnell.com
www.farnell.at

RS Components
Albrechtser Straße 11
A-3950 Gmünd
Phone +43 28 52 505
Fax +43 28 52 53 223
www.rs-components.at

France
RS Components SAS
Rue Norman King BP 40453
F-60031 Beauvais CEDEX
Phone +33 3 44 10 16 48
Fax +33 3 44 10 16 44
www.radiospares.fr

Farnell France SAS
81-83 rue Henri Depagneux
BP 60426 Limas
F-69654 Villefranche sur
Saône
Cedex
Phone +33 4 74 68 99 99
Fax +33 4 74 68 99 90
ventes@farnell.com
www.farnell.fr

Great Britain
RS Components Ltd.
PO Box 99, Corby
GB-Northants NN17 9RS
Phone +44 84 58 50 99 00
Fax +44 15 36 40 56 78
www.rs-components.com

Farnell
Canal Road
GB-Leeds, LS12 2TU
Phone +44 8447 11 11 11
Fax +44 8447 11 11 13
sales@farnell.co.uk
www.farnell.co.uk

Italy
RS Components S.p.A.
Via De Vizzi 93/95
I-20092, Cinisello Balsamo,
Milano
Phone +39 02 660 581
Fax +39 02 660 580 51
www.rs-components.it

Distrelec Italia s.r.l.
Via Canova 40/42
I-20020 Lainate (Mi)
Phone +39 02 - 93 75 51
Fax +39 02 - 93 75 57 55
info-it@distrelec.com
www.distrelec.com

Switzerland
Distrelec AG
Grabenstraße 6
CH-8606 Nänikon
Phone +41- 44 9 44 99 11
Fax +41- 44 9 44 99 88
www.distrelec.com

Farnell AG
Brandschenkestr. 178
Postfach 1703
CH-8027 Zürich
Phone +41 1 - 204 64 64
Fax +41 1 - 204 64 54
verkauf.ch@farnell.com
www.farnell.ch

Argentina
AUMECON S.A.
Acassuso 4768
1605 Munro
Prov. de Buenos Aires
Phone +54 11 47 56 1251
Fax +54 11 47 62 63 31
ventas@aumecon.com.ar
www.aumecon.com.ar

Australia
Balluff PTY LTD
18 Malvern Street
Bayswater, VIC 3153
Phone +61 1300 225833
Fax +61 1300 653894
sales@balluff.com.au
www.balluff.com.au

Brazil
Brastronic Comércio e
Serviço Importação e
Exportação Ltda.
Representante Exclusivo
no Brasil
Rua Antônio Pagano,
43 - Jardim Prudência
Cep 04368-040 São Paulo
Phone +55 (11) 5670-8970
vendas@kebbrazil.com.br
www.kebbrazil.com.br

Canada
Turck Chartwell Canada Inc.
140 Duffield Drive
Markham, Ontario L6G 1B5
Phone +1 905 513 7100
Fax +1 905 513 7101
sales@www.chartwell.ca
www.chartwell.ca

China
Kuebler (Beijing) Automation
Trading Co. Ltd.
Rm 1603, B Area, Tower 2,
Wangjing Soho,
No.1 Futong East Street,
Chaoyang, Beijing,
China,100102
Phone +86 10 8471 0818
Fax: +86 10 8471 0819
beijing@kuebler.com
www.kuebler.com

Egypt
AEE Advanced Electronic
Engineering Co.
3 Hassan El-Sheraie St.Off
El-Horiya St-Heliopolis
Cairo
Phone +20 2 2418 50 20
Fax +20 2 2415 92 65
hfarid@aeecontrols.com
www.aeecontrols.com

Hong Kong
Po Kwong Electric (HK) Ltd.
Rm. 177-180, 1/F, Blk C,
Hang Wai Ind. Ctr.,
6 Kin Tai St., Tuen Mun, N.T
Phone +852 24 23 66 22
Fax +852 24 61 10 02
sales@pokwong.com
www.pokwong.com

India
Kuebler Automation India Pvt Ltd
Plot No 677, S. No. 269/3,
Paud Road, Bhugaon,
Pune 412 115,
Maharashtra
Phone +91 99 7065 5599
Phone +91 20 6790 1-200 / 230 /
214 / 202
Fax +91 20 6790 1232
info@kuebler.in
www.kuebler.in

Indonesia
PT. Supra Engineering
Jl. Pecenongan 17 D
RI-10120 Jakarta
Phone +62 21 345 73 55
Fax +62 21 345 73 18
atsupra@supra.co.id
www.supra-engineering.com

Israel
Omega Engineering
P.o.Box 190
Ein Carmel 30860
Phone +972-4-9544993
Fax +972-4-9544992
info@omegae.net
www.omegae.net

Lebanon
Industrial Technologies S.A.L
(ITEC)
Blvd. Fouad Chehab
Point Center, Sin El Fil, Beirut
Phone +961 (1) 491161
Fax +961 (1) 491162
info@iteclb.com
www.iteclb.com

Malaysia
dpstar Smart Solutions Sdn Bhd
No. 37-1, Jalan OP 1/2
Pusat Perdagangan One Puchong,
Off Jalan Puchong,
47160 Puchong,
Selangor Darul Ehsan,
Malaysia
Phone +603 8074 8866
Fax +603 8074 8666
christiau@dpstar.com.my
www.dpstar.com.my

Mexico
TURCK Comercial, S. de RL de CV
Blvd. Campestre No. 100
Parque Industrial SERVER
C.P. 25350 Arteaga, Coahuila
Phone +52 844 411 6650
Toll Free: 01-800-01-TURCK
(Mexico only)
Fax +52 844 482 6926
mexico@turck.com
www.turck.com.mx

Morocco
r2i Consult SARL
109 rue Montaigne Val
Fleuri Maarif Casablanca
Maroc
Phone +212522986960
Fax +212522989537
info@r2imaroc.ma
www.r2imaroc.com

New Zealand
Carrel-Electrade Ltd.
P.O. Box 11-078
Eilerslie
NZ-Auckland 1542
Phone +64 95251753
Fax +64 95251756
sales@carrel-electrade.co.nz
www.carrel-electrade.co.nz

Peru
Techpro SAC
Calle Alberto del Campo 414
Magdalena del Mar
Lima 17 - Peru
Phone +51 98943 58-54
Fax +51 17272 685
techpro.peru@techprocorp.net
www.techprocorp.net

Philippines
Technorand Sales Coporation
122 McArthur Highway
0 Malabon, Metro Manila
Phone +632 985 07 05
Fax +632 716 59 86
technorand@gmail.com

Singapore
Raymond International Pte. Ltd.
Blk 219 Henderson Road #07-04
Henderson Industrial Park
Singapore 159556
Phone +65 62 76 37 38
Fax +65 62 76 37 39
sales@raymondcom.com
www.raymondcom.com

South Africa
Kübler Group
DC Auto-Motion (Pty) Ltd.
11 Sunrock Close,
131 Sunnyrock, Ext. 2
Germiston, Gauteng.
Phone +27 11 453 1740
Fax +27 86 508 5929
dave@dcauto-motion.co.za
www.kuebler.co.za

South Korea
Kuebler Korea (by F&B)
578, Kwaebop-dong, Sasang-ku
Pusan Industrial Supplies
Market 9-116
PUSAN
Phone +82 51 319 12 30
Fax +82 51 319 12 50
fnb@kuebler.co.kr
www.kuebler.kr

Taiwan, R.O.C.
• Encoders, transmission
technology:
E-E-Sensors & Automation Int'l Corp.
No.17-2, Beichang 2nd St.
Fengshan Dist.,
Kaohsiung City 83053
Taiwan, R.O.C.
Phone +886-7-7323606
Fax +886-7-7333023
ez-corp@umail.hinet.net
www.e-sensors.com.tw

• Electronic counters and
process devices:
Canaan Electric Corp.
6F-5, No. 63, Sec. 2
Chang An East Road
Taipei
Phone +886 225 08 23 31
Fax +886 225 08 47 44
sales@canaan-elec.com.tw
www.canaan-elec.com.tw

Thailand
Technology Instruments Co., Ltd.
549/9 Onnut Road Kwaeng
Pravet, Khet Pravet
Bangkok 10250
Phone +662 74 388 88
Fax +662 74 388 43
marketing@tic.co.th
www.tic.co.th

Tunisia
H2M Technologies
13, Rue El Moutanabi
TN-2037 El Menzah 7 - Tunis
Phone +216 71 42 76 77
Fax +216 71 42 76 88
h2m.tech@planet.tn

U.S.A.
Kuebler Inc.
10430-J Harris Oak Boulevard
Charlotte, NC 28269
Phone +1-704-705-4710
Toll Free +1-855-KUEBLER (583-2537)
Fax +1-704-733-9170
usa@kuebler.com
www.kuebler.com/usa

• Counting and process
technology:
Howland Technology
8129 North Austin AVE
Morton Grove, IL 60053
Toll-free number:
1-800-951-8774
Phone 847 965 9808
Fax 847 901 9846
sales@howlandtechnology.com
www.kueblerusa.com

United Arab Emirates
Baer Measurements LLC
P.O. Box 111393
Al Gaith Tower 1902,
Hamdan Street
Abu Dhabi - UAE
Phone +971 2 627 2097
Fax +971 2 627 2091
info@bml.ae
www.bml-international.com

Vietnam
GNN Co., Ltd
153, Nguyen Van Thu
Da Koa Ward, District 1
Ho Chi Minh City
Phone +84 8 3517 4923
Fax +84 8 3517 4924
contact@gnnvietnam.com
www.gnnvietnam.com

Contact partners in Germany

PLZ 01000 ... 09999

PLZ 15000 ... 15999
Kübler Vertriebsbüro Süd-Ost
Lars Meyer
Durchfahrt 9
09569 Oederan
Phone +49 37292 283500
Fax +49 37292 283501
lars.meyer@kuebler.com

PLZ 10000 ... 14999

PLZ 16000 ... 19999
PLZ 20000 ... 32999
PLZ 38000 ... 39999
Kübler Vertriebsbüro Nord
Hermi Herrmann
Mohnblumenweg 6
28876 Oyten
Phone +49 4207 6880-32
Fax +49 4207 6880-34
hermi.herrmann@kuebler.com

PLZ 33000 ... 33999

Kübler Vertriebsbüro West
Torsten Czubkowski
Auf der Ümcke 11 a
59757 Arnsberg
Phone +49 2932 891898
Fax +49 2932 53311
torsten.czubkowski@kuebler.com

PLZ 34000 ... 37999

Kübler Vertriebsbüro Mitte
Stefan Heinigk
Gartenstraße 10
35759 Driedorf
Phone +49 2775 578427
Fax +49 2775 578428
stefan.heinigk@kuebler.com

PLZ 40000 ... 47999

Kübler Vertriebsbüro West
Torsten Czubkowski
Auf der Ümcke 11a
59757 Arnsberg
Phone +49 2932 891898
Fax +49 2932 53311
torsten.czubkowski@kuebler.com

PLZ 48000 ... 49999

Kübler Vertriebsbüro Nord
Hermi Herrmann
Mohnblumenweg 6
28876 Oyten
Phone +49 4207 6880-32
Fax +49 4207 6880-34
hermi.herrmann@kuebler.com

PLZ 50000 ... 54999

PLZ 55300 ... 55999
PLZ 56500 ... 56999
PLZ 58000 ... 59999
Kübler Vertriebsbüro West
Torsten Czubkowski
Auf der Ümcke 11a
59757 Arnsberg
Phone +49 2932 891898
Fax +49 2932 53311
torsten.czubkowski@kuebler.com

PLZ 55000 ... 55299

PLZ 56000 ... 56499
PLZ 57000 ... 57999
Kübler Vertriebsbüro Mitte
Stefan Heinigk
Gartenstraße 10
35759 Driedorf
Phone +49 2775 578427
Fax +49 2775 578428
stefan.heinigk@kuebler.com

PLZ 60000 ... 65999

PLZ 67000 ... 67599
PLZ 68000 ... 69999
Kübler Vertriebsbüro Mitte
Stefan Heinigk
Gartenstraße 10
35759 Driedorf
Phone +49 2775 578427
Fax +49 2775 578428
stefan.heinigk@kuebler.com

PLZ 66000 ... 66999

PLZ 67600 ... 67999
Kübler Vertriebsbüro West
Torsten Czubkowski
Auf der Ümcke 11a
59757 Arnsberg
Phone +49 2932 891898
Fax +49 2932 53311
torsten.czubkowski@kuebler.com

PLZ 70000 ... 79999

Kübler Vertriebsbüro Süd-West
Philipp Lang
Lembergstraße 6
72119 Ammerbuch-Altingen
Phone +49 7032 2293665
Fax +49 7032 2993454
philipp.lang@kuebler.com

PLZ 80000 ... 87999

PLZ 89200 ... 89499
Kübler Vertriebsbüro Süd
Bernhard Preißler
Am Seeacker 8
93326 Abensberg
Phone +49 9443 9186926
Fax +49 9443 9186974
bernhard.preissler@kuebler.com

PLZ 88000 ... 89199

PLZ 89500 ... 89999
Kübler Vertriebsbüro Süd-West
Philipp Lang
Lembergstraße 6
72119 Ammerbuch-Altingen
Phone +49 7032 2293665
Fax +49 7032 2993454
philipp.lang@kuebler.com

PLZ 90000 ... 93999

PLZ 95000 ... 95999
Kübler Vertriebsbüro Süd-Ost
Lars Meyer
Durchfahrt 9
09569 Oederan
Phone +49 37292 283500
Fax +49 37292 283501
lars.meyer@kuebler.com

PLZ 94000 ... 94999

Kübler Vertriebsbüro Süd
Bernhard Preißler
Am Seeacker 8
93326 Abensberg
Phone +49 9443 9186926
Fax +49 9443 9186974
bernhard.preissler@kuebler.com

PLZ 96000 ... 99999

Kübler Vertriebsbüro Mitte
Stefan Heinigk
Gartenstraße 10
35759 Driedorf
Phone +49 2775 578427
Fax +49 2775 578428
stefan.heinigk@kuebler.com

Approved system partners/ distributors

22149 Hamburg
Hermann Seidel GmbH
Techn. Vertretungen
Rahlstedter Str. 16
Phone +49 40 675085-0
Fax +49 40 675085-85
info@seidel-gmbh.de
www.seidel-gmbh.de

42499 Hückeswagen
Fuhrmeister + Co. GmbH
Industrie-Elektronik
Stahlschmidtsbrücke 61
Phone +49 2192 851122
Fax +49 2192 851127
info@fuhrmeister-gmbh.de
www.fuhrmeister-gmbh.de

66287 Göttelborn
Herbert Neundorfer
GmbH & Co. KG
Werksvertretungen
Am Campus 5
Phone +49 6825 9545-0
Fax +49 6825 9545-99
info@herbert-neundoerfer.de
www.herbert-neundoerfer.de

82069 Hohenschäftlarn
Bachmann
Electronic GmbH
Am Wagnerfeld 4
Phone +49 8178-8676-0
Fax +49 8178-8676-50
info@bachmann-electronic.de
www.bachmann-electronic.de


Catalogue distributors (Germany):

28359 Bremen
Distrelec Schuricht GmbH
Lise Meitner-Str. 4
Phone +49 1805 2234-35
Fax +49 1805 2234-36
scc@distrelec.de
www.distrelec.de

64546 Mörfelden-Walldorf
RS Components GmbH
Hessenring 13 b
Phone +49 6105 401234
Fax +49 6105 401100
www.rs-components.de

85609 Aschheim
Farnell GmbH
Karl-Hammerschmidt-Straße 38
Phone +49 89 61303-0
www.farnell.de

92240 Hirschau
Conrad Electronic SE
Klaus-Conrad-Straße 1
92240 Hirschau
Phone +49 9604 408 787
www.conrad.com

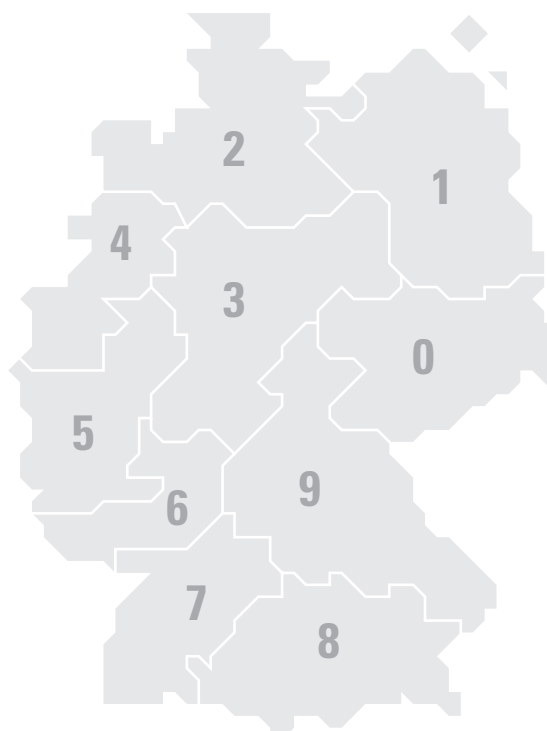



Kübler

Kübler Group
Fritz Kübler GmbH
Schubertstrasse 47
D-78054 Villingen-Schwenningen
Germany
Phone +49 7720 3903-0
Fax +49 7720 21564
info@kuebler.com
www.kuebler.com

www.kuebler.com/sliprings