

ER-AP 60 H



short description

Surface-mounted fan for air extraction, air volume 61 m³/h, with humidity control and base load circuit


Article number 0084.0154

Technical Data

Model	Humidity control
Air flow volume	35 m ³ /h/61 m ³ /h
Rotating speed	900 1/min/1,250 1/min
Air direction	Air extraction
Speed controllable	—
Rated voltage	230 V
Frequency	50 Hz
Power consumption	11 W/21 W
I _{max}	0.13 A/0.17 A
Degree of protection (IP)	X5
Mains cable	5 × 1.5 mm ²
Installation site	Wall, Ceiling
Type of installation	Surface-mounted
Installation position	vertical, horizontal
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	2.56 kg
Filter class	G2
Connection diameter	75 mm, 80 mm
Airstream temperature at I _{Max}	40 °C
Sound pressure level	33 dB(A)/40 dB(A)/Specifications in accordance with DIN 18017-3 at an equivalent absorption area A _L = 10 m. ²
Approval number	Z-51.1-42
Range	B
EAN	4012799841548
Total L _{WA7} , high (housing and free inlet sound power level)	43 dB(A)

ER-AP 60 H

Characteristic curve

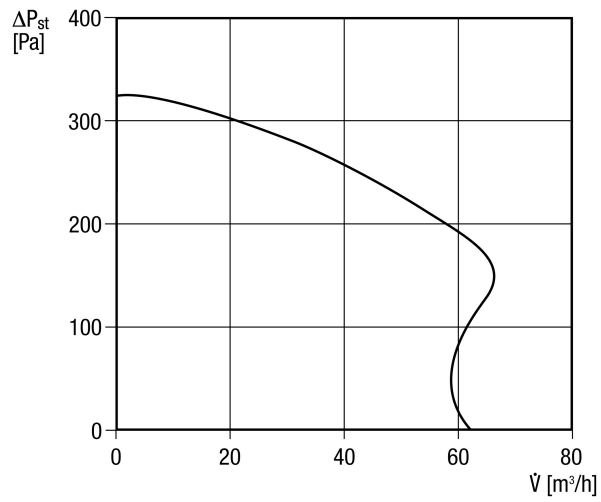

Dimensions [mm]

