


TM2520A

Feature

- Reflow solderable.
- Low impedance.
- Low profile and surface mountable MCF.
- This is achieved by using leadless type ceramic package.
- **Frequency range 80 ~ 160 MHz**
- Automatic mount by tape and reel

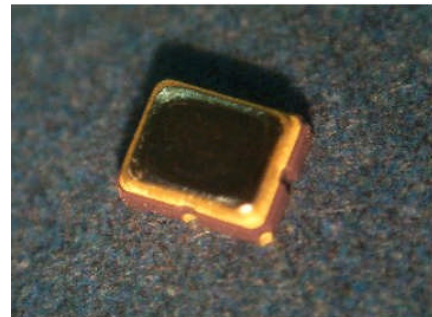

Specifications (example)

SIZE	2.5 X 2.0 X 0.9 MM
Nominal Frequency	130 MHz
Pass Bandwidth	3.0 dB: ± 15.0 KHz min.
Attenuation Bandwidth	30.0 dB: ± 200 KHz min.
Pass-band Ripple	1.0 max. dB
Insertion Attenuation	4.0 max. dB
Group Delay Time	10 max. (μ s): $f_0 \pm 10.5$ kHz
Impedance	200 (Ω) // -2.0 (pF)
Operating Temperature range	(-20~85°C)

Products with specific requirements are available upon request.

■ Outline

