

PCB Separator MAESTRO 2/2M



MAESTRO 2 separates small amount and prototype series of PCBs fast and economically. The compact and stable aluminum frame requires only a minimum of space.

MAESTRO 2

is the reasonable model to start with, suitable for smaller numbers of PCBs. The PCB is fed manually between the circular blades and is thereby separated.

MAESTRO 2M motorized


Separates large numbers of PCBs without fatigue of the operator. The lower circular blade is driven by a motor. The PCB is fed between the circular blades where it is seized, transported and separated. Three different speeds can be selected.

Strain of components

Frequently for critical components an upper limit of tensile stress will be determined. Please ask us regarding possibilities to reduce tensile stress of components.

Save Operation

The clearance between the upper guide **1** and the lower guide **2** is adjustable to ensure that the PCB is only fed through the machine in the pre-scored groove.

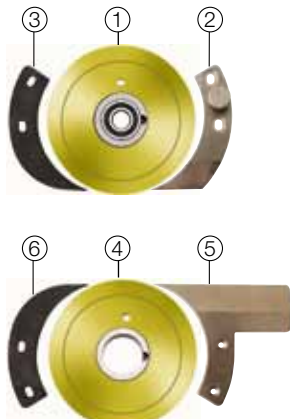

Maximum height of components next to the groove	
PCB thickness A	0.8 - 3.2 mm
Remaining PCB thickness B	typical 1/3 of Dim. A max. 0.8 mm
Depth of scoring C	min. 0.25 mm
Increase in external dimensions after separation	0.1 - 0.2 mm
The pre-scored grooves can be interrupted by cutouts with a length of up to approx. 5 mm.	


Technical Data	
Separation type	Component side circular blade Solder side circular blade
Operation	MAESTRO 2 by hand MAESTRO 2M motor-driven
Separation speed 2M	100/200/300 mm/s
Separation length	15 - 300 mm
Mains voltage 2M	230/115 V~ 50 - 60 Hz
Earthing stud	Ø 10 mm
Operating temperature	10 - 35° C
Storage/transport temp.	-20 - 50° C
Humidity, not condensing	10 - 85%
Safety regulations	CE, FCC class A
Weight	MAESTRO 2 16 kg MAESTRO 2M 19 kg
Dim. H x W x D	330 x 195 x 620 mm

Part No.	Description
8933900	PCB Separator MAESTRO 2
8933935	PCB Separator MAESTRO 2M

Pos.	Part No.	Spare parts	VP
1	8930509.001	Upper circular blade	1
2	8930522.001	Guide cpl.	1
3	8930744.001	Upper guide	1
4	8933661.001	Lower circular guide	1
5	8930514.001	Guide	1
6	8930745.001	Lower guide	1

- *Headquarters in Germany*
- *cab subsidiaries*
350 distribution partners
in more than 80 countries.

cab is represented in every active commercial center - worldwide.

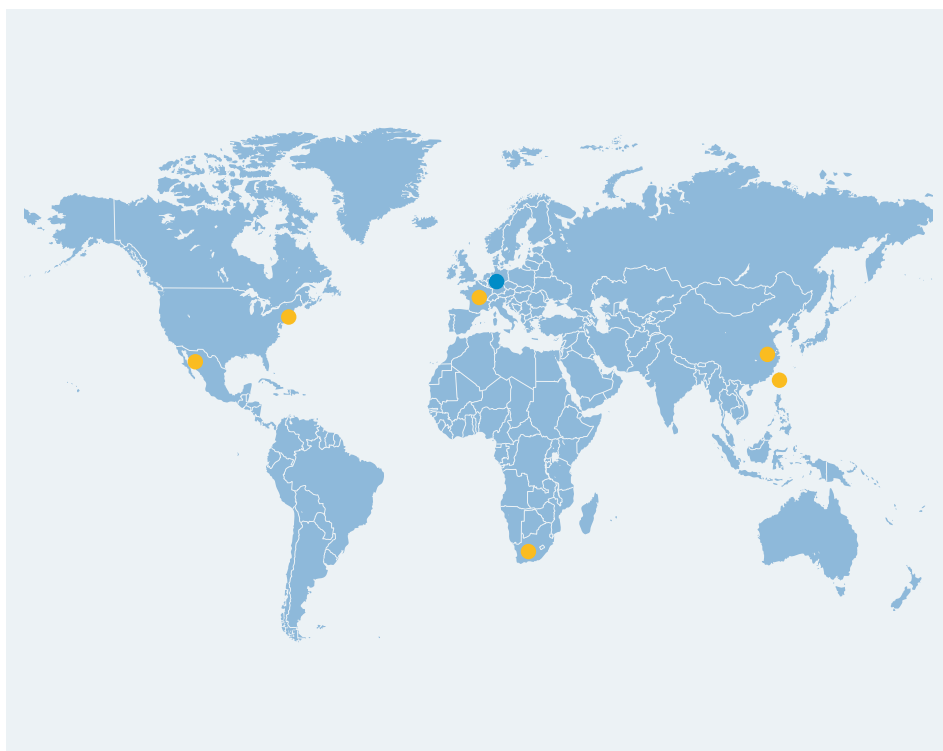

www.cab.de

Germany

cab Produkttechnik
GmbH & Co KG
Postfach 1904
76007 Karlsruhe
Wilhelm-Schickard-Str. 14
76131 Karlsruhe
Telefon +49 721 6626-0
Telefax +49 721 6626-249
www.cab.de
info@cab.de

Representatives in other countries on request.

France

cab technologies s.a.r.l.
67350 Niedermodern
Téléphone +33 388 722 501
www.cab.de/fr
info.fr@cab.de

USA

cab Technology Inc.
Tyngsboro MA, 01879
Phone +1 978 649 0293
www.cab.de/us
info.us@cab.de

South Africa

cab Technology (Pty.) Ltd.
2125 Randburg
Phone +27 11-886-3580
www.cab.de/za
info.za@cab.de

Asia 亚洲

cab Technology Co, Ltd.
希爱比科技股份有限公司
Junghe, Taipei, Taiwan
Phone +886 2 8227 3966
www.cab.de/tw
info.asia@cab.de

China 中国

cab (Shanghai) Trading Co., Ltd
铠博(上海)贸易有限公司
Phone +86 21 6236-3161
www.cab.de/cn
info.cn@cab.de

This documentation and any translations hereof are the property of cab GmbH & Co KG.

The replication, processing, reproduction or distribution in whole or in parts requires our prior written consent. © Copyright bei cab/9008452.

All delivery, design and technical specifications are compiled to the best of our current knowledge and are subject to change without prior notice.