



6 YEARS GUARANTEE
APPROVED QUALITY

Vibranivo[®] 1000 / 5000

Vibration level limit switch

The universal unit for reliable level monitoring of granulated and powdered bulk goods – versatile, suitable especially for applications with high mechanical loading and measurement of bulk goods in liquids; certified for hazardous locations (gas and dust)







Vibranivo® 1000 / 5000




- Modular and simple design
- For applications with high mechanical loading
- Particularly suitable for interface measurement
- Absolutely maintenance free

Application: Vibranivo® probes can be used as full, demand or empty detectors in bulk good silos. They are especially suited for use in all solids which are conveyed or stored under extreme conditions as well as for interface measurement. The short fork design allows mounting in containers with very limited space. VN vibration forks are available with international certificates for applications in hazardous locations (gas and dust).

Types of Vibranivo demand, full and empty detectors:

| | | | |
|--|--|---|--|
| Vibranivo® ..020 Short extension length, vertical, horizontal and oblique installation | Vibranivo® ..030 Design with pipe extension, vertical and oblique installation | Vibranivo® ..040 Delivery without pipe extension (reduced shipping costs, flexible length), vertical and oblique installation | Vibranivo® ..050 Model with cable extension, vertical installation up to 7 m measuring range |
|  |  |  |  |

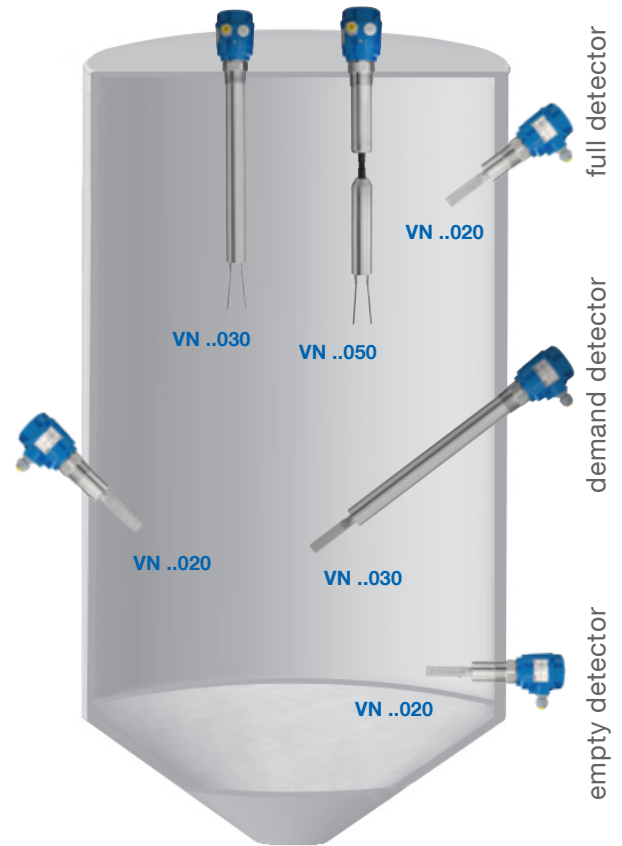

Technical Data

| | | |
|-----------------------------------|---|-----------------------------|
| Housing | Aluminium IP66 / NEMA Type 4X | |
| Pressure range | -1 up to +16 bar (-14.5 up to +145 psi) | |
| Supply voltage/ | Relay SPDT | 19..230V AC, 19..55V DC |
| Signal output | Relay DPDT | 19..230V AC, 19..36V/55V DC |
| | PNP | 18..50V DC 3-wire |
| | 2-wire without contact | 19..230V AC/DC |
| | 8/16mA; 4-20mA | 12,5-30/36V DC 2-wire |
| Versions with certificates | ATEX, IEC-Ex, FM / CSA, TR-CU, INMETRO, CCC-Ex, KCs (Dust explosion-proof, Flameproof, Intrinsically safe, Increased safety) | |
| Process temperature | -40°C up to +150°C (-40°F up to + 302°F) | |
| Sensitivity | From 50 g/l (3 lb/ft ³) adjustable in 2 steps | |
| Process connection | R 1½" conical; NPT 1½"; various flanges available | |
| Vibration fork/ extension | Stainless steel 1.4301 (SS304) or 1.4404 (SS316L) various lengths available | |

Housing types



Installation

Mounting in downpipe as back up switch

Mounting in loading bellow as full detector

