

# Highly effective

## Chlorine Evaporator C 6100



### Efficient gas production

The evaporator mainly consists of a pipe that is designed as an evaporation coil with a vertical inlet and outlet. The evaporation coil is encased by a steel tank that is filled with water.

Immersion heaters below the evaporation coil close to the tank floor guarantee that the water is evenly heated due to free convection. This means that neither a circulation pump nor a mixer is needed for circulating the water.

The liquid chlorine enters the evaporator from the top and flows through the evaporation coil towards the tank floor in counterflow to the hot water, which is circulating upwards. On its way downwards, the chlorine absorbs the water's heat and evaporates as a result. This design, whereby both fluids are passing each other in opposing directions, ensures that the heat of the water is used effectively and efficiently for evaporating the liquid chlorine.

### Controlled safety

The C 6100 chlorine evaporator fulfils all criteria of the declaration of conformity according to the pressure equipment directive 97/23/EC. The evaporation coil of the C 6100 evaporator fulfils the design requirements according to AD-2000 rules, Eurochlor GEST 75/47 and Chlorine Institute Pamphlet 9.

### Functions

- Evaporator output of up to 220 kg Cl<sub>2</sub>/h
- Evaporation coil design with water as a heating medium
- Hot water tank and evaporation coil made of seamless pressure tank steel
- Electrical heating of the water using immersion heaters
- Sensors for monitoring the temperature, pressure and fill level
- Visual indicators for pressure, fill level and temperature
- Cathodic anti-corrosion protection

### Automatically safe

The evaporator has sensors for monitoring the water temperature and water level in the tank. These sensors are used for controlling the electrical heating and the fill level in the tank. Furthermore, they are used for closing the gas pipe to the chlorine gas dosing devices should there be a risk of the liquid chlorine breaking through. Due to the high degree of automation of the evaporator, the plant operator's monitoring effort is minimised.

## Technical data

Evaporation coil volume (model variant)		1,8 dm <sup>3</sup>	8,3 dm <sup>3</sup>
Evaporator capacity	kg/h	65	220
Heating capacity	KW	2 x 5	4 x 5
Volume of warm water tank	Litres	175	
Voltage supply		230/400 V, 50/60 Hz	
Contact load rating	Contact thermometer	Max. 250 V, max. 1 A, 30 W	
	Contact pressure gauge		
	Temperature monitoring		
Chlorine connection (inlet and outlet)		Flange DN25/PN40 that complies with EN 1092 Form D (groove)	
Permissible ambient temperature	°C	0 – 50	
Hydrostatic test pressure	bar	60	
Operating pressure	bar	40 (100 °C)	
Weight	kg	275	


## Scope of delivery

The C 6100 chlorine evaporator's scope of delivery includes:


- Chlorine Evaporator C 6100
- Counterflange for assembly on the site pipe line
- Assembly accessories for flange DN25/PN40
- Square hollow key SW 7

## Dimensions

All dimensions in mm

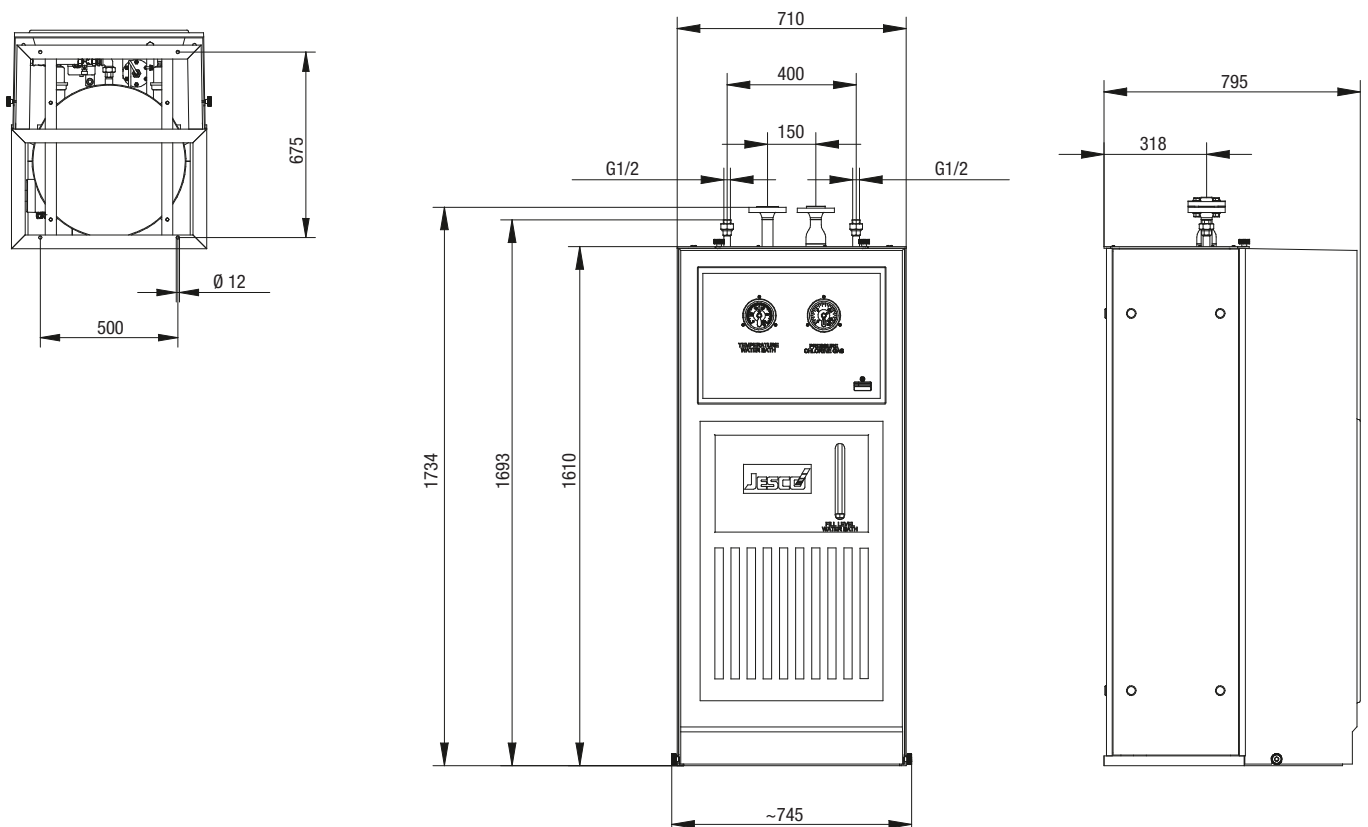


## Standard accessories




### Control cabinet

For 1x evaporator with a heating output of up to 20 kW (220 kg Cl<sub>2</sub>/h).  
 All sensors are analysed at the evaporator. Control of heater and water refilling. Indication of operating states on the SPS display. Remote signalling of operation notifications and alarms. Control of the motor ball valve.  
 Voltage supply: 230/400 V, 50 – 60 Hz, protection class IP55.  
 Dimensions: 1000 x 800 x 300 (H x W x D)



### Motor ball valve with battery system

For protecting metering equipment against liquid chlorine. Is installed directly at the evaporator outlet. In the event that the power supply is interrupted, the ball valve is closed using battery power.  
 Voltage supply: 85 – 240 VAC/DC, closing time 11 s.  
 Inlet: flange DN25/PN40 with a groove; outlet: flange DN25/PN40 with a spring



### Expansion system with a rupture disc, contact pressure gauge and expansion tank

Under the influence of heat, liquid chlorine expands considerably, creating extremely high pressure. Therefore, all pipeline systems for liquid chlorine must be fitted with a relief system.  
 Rupture disc DN25 / Monel / 22.5 bar; contact pressure gauge 0 – 40 bar / Ø 63 mm  
 Inlet 1" NPT internal or external (T-piece included in the scope of delivery)  
 Expansion tanks available in different sizes



### Pressure gauge for chlorine gas

0 – 16 bar / Ø 100 mm; 1x max-separator contact  
 Various measuring ranges, nominal sizes and design with electrical contacts

**Product range**

Lutz Pumpen GmbH  
Postfach 1462  
D-97864 Wertheim  
www.lutz-pumpen.de

**Product range**

Lutz-Jesco GmbH  
Postfach 100164  
D-30891 Wedemark  
www.lutz-jesco.de



Barrel and container pumps



Dosing pumps




Measuring and control equipment



Flow meters



Chlorinators



Disinfection



Double diaphragm pumps



Chemical centrifugal pumps



Standard plus



Centrifugal pumps



**TECHNOPOL**

Products for the disinfection of swimming pool water based on salt water electrolysis and domestic water technology



The Lutz-Jesco App for iPads and iPhone is available from the iTunes App Store. Further information on this can be found at [www.lutz-jesco.com](http://www.lutz-jesco.com)



Head Office  
**Lutz-Jesco GmbH**  
Am Bostelberge 19  
30900 Wedemark  
Germany

Tel.: +49 5130 5802-0  
Fax: +49 5130 580268

E-mail: [info@lutz-jesco.com](mailto:info@lutz-jesco.com)  
Website: [www.lutz-jesco.de](http://www.lutz-jesco.de)

Hungary  
**Lutz-Jesco Üzletág**  
Vasvári P. u. 9.  
9024 Győr  
Hungary

Tel.: +36 96 523046  
Fax: +36 96 523047

E-mail: [info@lutz-jesco.hu](mailto:info@lutz-jesco.hu)  
Website: [www.lutz-jesco.hu](http://www.lutz-jesco.hu)

Austria  
**Lutz-Jesco GmbH**  
Aredstraße 7/2  
2544 Leobersdorf  
Austria

Tel.: +43 2256 62180  
Fax: +43 2256 6218062

E-mail: [info@lutz-jesco.at](mailto:info@lutz-jesco.at)  
Website: [www.lutz-jesco.at](http://www.lutz-jesco.at)

Netherlands  
**Lutz-Jesco Nederland B.V.**  
Nijverheidstraat 14 C  
2984 AH Ridderkerk  
Netherlands

Tel.: +31 180 499460  
Fax: +31 180 497516

E-mail: [info@lutz-jesco.nl](mailto:info@lutz-jesco.nl)  
Website: [www.lutz-jesco.nl](http://www.lutz-jesco.nl)



Great Britain  
**Lutz-Jesco (GB) Ltd.**  
Gateway Estate  
West Midlands Freeport  
Birmingham B26 3QD  
Great Britain

Tel.: +44 121 782 2662  
Fax: +44 121 782 2680

E-mail: [info@lutz-jesco.co.uk](mailto:info@lutz-jesco.co.uk)  
Website: [www.lutz-jesco.co.uk](http://www.lutz-jesco.co.uk)

USA  
**Lutz-JESCO America Corp.**  
55 Bermar Park  
Rochester, N.Y. 14624  
USA

Tel.: +1 585 426-0990  
Fax: +1 585 426-4025

E-mail: [mail@jescoamerica.com](mailto:mail@jescoamerica.com)  
Website: [www.lutzjescoamerica.com](http://www.lutzjescoamerica.com)

East Asia  
**Lutz-Jesco East Asia Sdn Bhd**  
6 Jalan Saudagar U1/16  
Hicom Glenmarie Industrial Park  
40150 Shah Alam/ Selangor  
Malaysia

Tel.: +603 55692322  
Fax: +603 55691322

E-mail: [info@lutz-jescoasia.com](mailto:info@lutz-jescoasia.com)  
Website: [www.lutz-jescoasia.com](http://www.lutz-jescoasia.com)

Middle East  
**Lutz-Jesco Middle East FZE**  
P.O. Box 9614  
SAIF-Free Zone Center  
Sharjah  
UAE

Tel.: +971 6 5572205  
Fax: +971 6 5572230

E-mail: [info@jescome.com](mailto:info@jescome.com)  
Website: [www.jescome.com](http://www.jescome.com)

