



Description	In-Line pressure regulator with factory-set outlet pressure, reducing from e.g. 15 bar to 5 bar. The regulator is suited for basic pressure control only with an outlet pressure tolerance of approx. ± 20%. Non-relieving function, therefore not recommended for applications such as nailers
Benefits	<ul style="list-style-type: none"> • Higher safety through lower pressure. Tools and equipment protected against pressure damages • Cost reduction through substantially reduced air consumption • Noise reducing for tools
Media	compressed air, non-corrosive gases
Supply pressure	max. 18 bar
Adjustment	Select the pressure regulator according to the desired outlet pressure. The outlet pressure cannot be subsequently adjusted. This safeguards against tampering.
Relieving function	non-relieving
Temperature range	0 °C to 60 °C / 32 °F to 140 °F
Material	Body: zinc Elastomer: NBR/Buna-N, optionally FKM



Dimensions			Flow rate	Supply pressure	Connection thread	Outlet pressure	Order number
Ø A	B	A/F	l/min*1	max. bar	G	bar	


Regulator for air "SaveAir®"							supply pressure max. 18 bar, non-relieving, accuracy ±15%*2, made of zinc	231
34	52	17	700	18	G1/4	1	231A0210	
						2	231A0220	
						3	231A0230	
						4	231A0240	
						5	231A0250	
						6	231A0260	
						7	231A0270	
						8	231A0280	

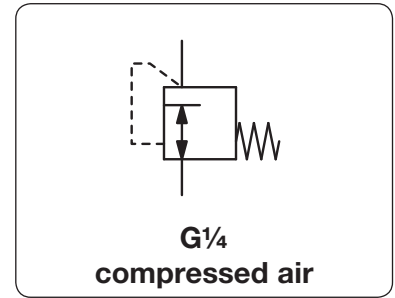


231A0240

Special options, add the appropriate letter


NPT	connection thread	231A 12 . .
deviant pressure range	indicate on order	231A . 2XX



231



cross section

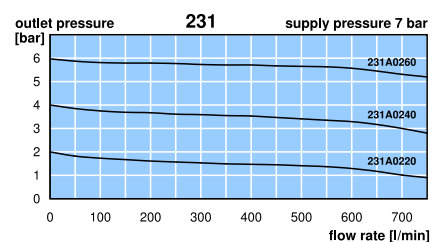

*1 at 7 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop *2 outlet pressure < 3 bar ±30%