

Shoulder screws flathead for DIN 173 drill bushes

Item description/product images



Description


Material:

Steel.

Version:

Bright, grade 10.9

Drawings

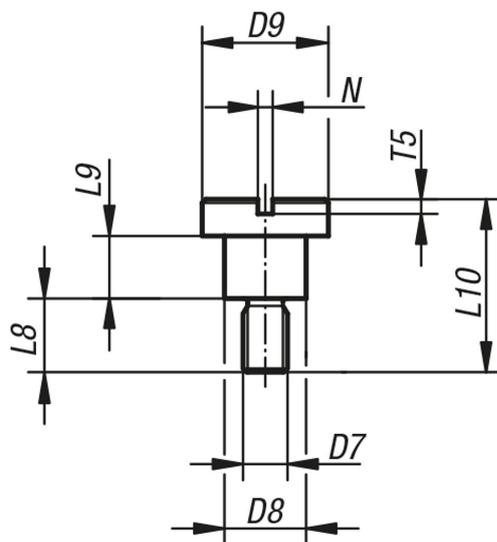

Overview of items

| Order No. | Product type | D7 | for drill bushes (D1) | L8 | L9 | L10 | D8 | D9 | N | T5 |
|--------------|--------------|----|-----------------------------|------|------|-----|-----|----|-----|-----|
| B0005.05X03 | short | M5 | ≤6.0 | 9 | 3 | 15 | 7,5 | 13 | 1,6 | 2 |
| B0005.06X04 | short | M6 | > 6,0 ≤ 12,0 | 10 | 4 | 18 | 9,5 | 16 | 2 | 2,5 |
| B0005.08X55 | short | M8 | > 12,0 ≤ 30,0 | 11,5 | 5,5 | 22 | 12 | 20 | 2,5 | 3 |
| B0005.05X06 | long | M5 | ≤6.0 | 9 | 6 | 18 | 7,5 | 13 | 1,6 | 2 |
| B0005.06X08 | long | M6 | > 6,0 ≤ 12,0 | 10 | 8 | 22 | 9,5 | 16 | 2 | 2,5 |
| B0005.08X105 | long | M8 | > 12,0 ≤ 30,0 | 11,5 | 10,5 | 27 | 12 | 20 | 2,5 | 3 |

Shoulder screws flathead for DIN 173 drill bushes

Overview of items

Information about this article

DIN 173 flat head screws for replaceable drill bushes The steel flat head screws are used with DIN 173 replaceable drill bushes with a diameter of up to 30 mm. If flat head screws are required for an application, these from Norelem will meet all requirements. Our screws are grade 10.9. They are available in the sizes M5 to M8 making them ideal for mounting drill bushes. The drill bushes can only be correctly mounted with no annoying protruding edges when the correct size of flat head screw is used.