

# ER 60



## short description

Fan insert with cover and filter for installation in recessed-mounted housings, air volume 62 m<sup>3</sup>/h


Article number 0084.0100

## Technical Data

Model	Standard model
Air flow volume	62 m <sup>3</sup> /h
Rotating speed	1,250 1/min
Air direction	Air extraction
Speed controllable	—
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Power consumption	21 W
I <sub>max</sub>	0.16 A
Degree of protection (IP)	X5
Mains cable	3 × 1.5 mm <sup>2</sup>
Installation site	Wall, Ceiling
Type of installation	Recessed-mounted
Installation position	vertical, horizontal
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	1.7 kg
Filter class	G2
Airstream temperature at I <sub>Max</sub>	40 °C
Sound pressure level	36 dB(A)/Specifications in accordance with DIN 18017-3 at an equivalent absorption area A <sub>L</sub> = 10 m. <sup>2</sup>
Range	B
EAN	4012799841005
Total L <sub>WA7</sub> , high (housing and free inlet sound power level )	40 dB(A)

# ER 60

## Characteristic curve

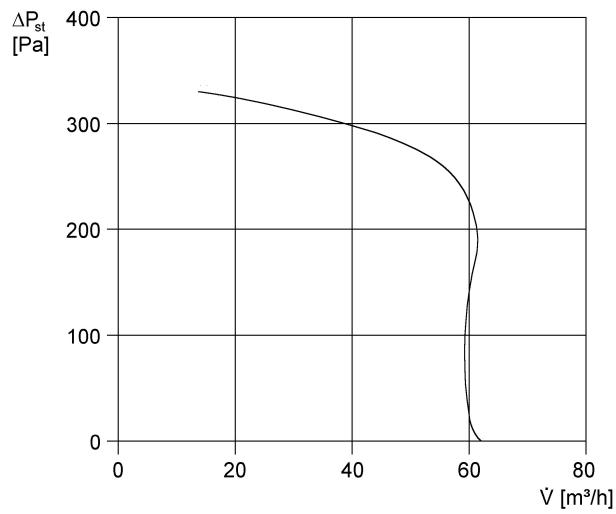

## Dimensions [mm]

ER recessed housing with second room connection

