


# OKS 1133

## Low-Temperature Silicone Grease

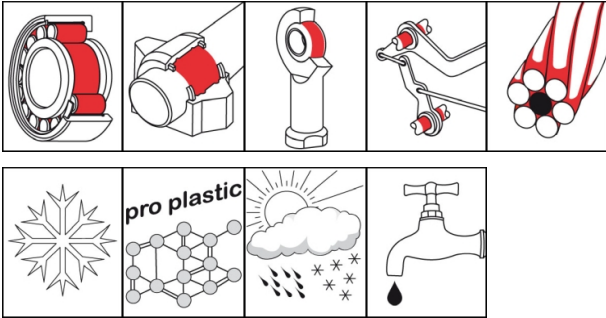

### Description

OKS 1133 is a low-temperature silicone grease.

### Applications

- Lubrication of rolling and friction bearings, as well as other machine elements at medium rotating speeds or sliding speeds in a broad temperature range
- For example, electric motors, drives, control systems and telecommunication and navigation systems under arctic conditions, Bowden cables and brake mechanisms in aircraft, sliding parts in shock-freezing systems etc.
- Lubricating grease for plastic/plastic and plastic/metal pairs and elastomers
- For plastic sliding coatings in bridge supports and as a parting agent in plastics processing

### Branches

- Shipbuilding and marine technology
- Paper and packaging industry
- Iron and steel industry
- Plant and machine (tool) engineering
- Glass and foundry industry
- Chemical industry
- Logistics
- Rail vehicle technology
- Rubber and plastic processing
- Municipal services

### Advantages and benefits

- Highly effective due to optimum formula
- Broad temperature range with a wide range of possible uses
- Excellently suited for lubricating plastics and elastomers
- Lubricating grease resistant to ageing, especially at low temperatures

# OKS 1133

## Low-Temperature Silicone Grease

### Application tips

For best results, clean lubricant point carefully, e.g. with OKS 2610 or OKS 2611 universal cleaner. Remove the corrosion protection ahead of the initial filling. Fill the bearings in a way that all the functional surfaces for sure get the grease. Slow moving bearings (DN-value < 50,000) should be filled completely, normal moving bearings should be filled to 1/3 of the free inner housing space. Observe the instructions of the bearing or machine manufacturer. Relubrication with a grease gun on to the grease nipples or with an automatic lubrication system. Relubrication intervals and amount to be defined acc. to the service conditions. If the removal of the old grease is not possible the amount of grease has to be limited to avoid excess lubrication of the bearing. At longer relubrication intervals a complete exchange of the old grease is recommended. Only mix with appropriate lubricants. Bearings filled with silicon grease must not have higher loads than 1/3rd of the bearing's permitted load. Silicone-based plastics, e.g. silicone rubber, can be dissolved by silicone grease. Silicone grease must not be applied to sliding surfaces under influence of pure oxygen.

### Packaging

- 500 g Can
- 5 kg Hobbock
- 25 kg Hobbock

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyphenylmethylsiloxane
thickener				lithium hydroxystearate
<b>Application related technical data</b>				
marking	DIN 51 502	DIN 51 825		KSI2S-70
viscosity at (25°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	100
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	80
drop point	DIN ISO 2176		°C	> 220
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2
worked penetration	DIN ISO 2137	60DH	0.1 mm	265-295
oil separation	DIN 51 817	168h/40°C	percent in weight	1.6
lower operating temperature			°C	-73
upper operating temperature			°C	200
colour				transparent
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	1
DN value (dm x n)			mm/min	200,000
four-ball test rig welding load	DIN 51 350-4		N	1,200

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.