



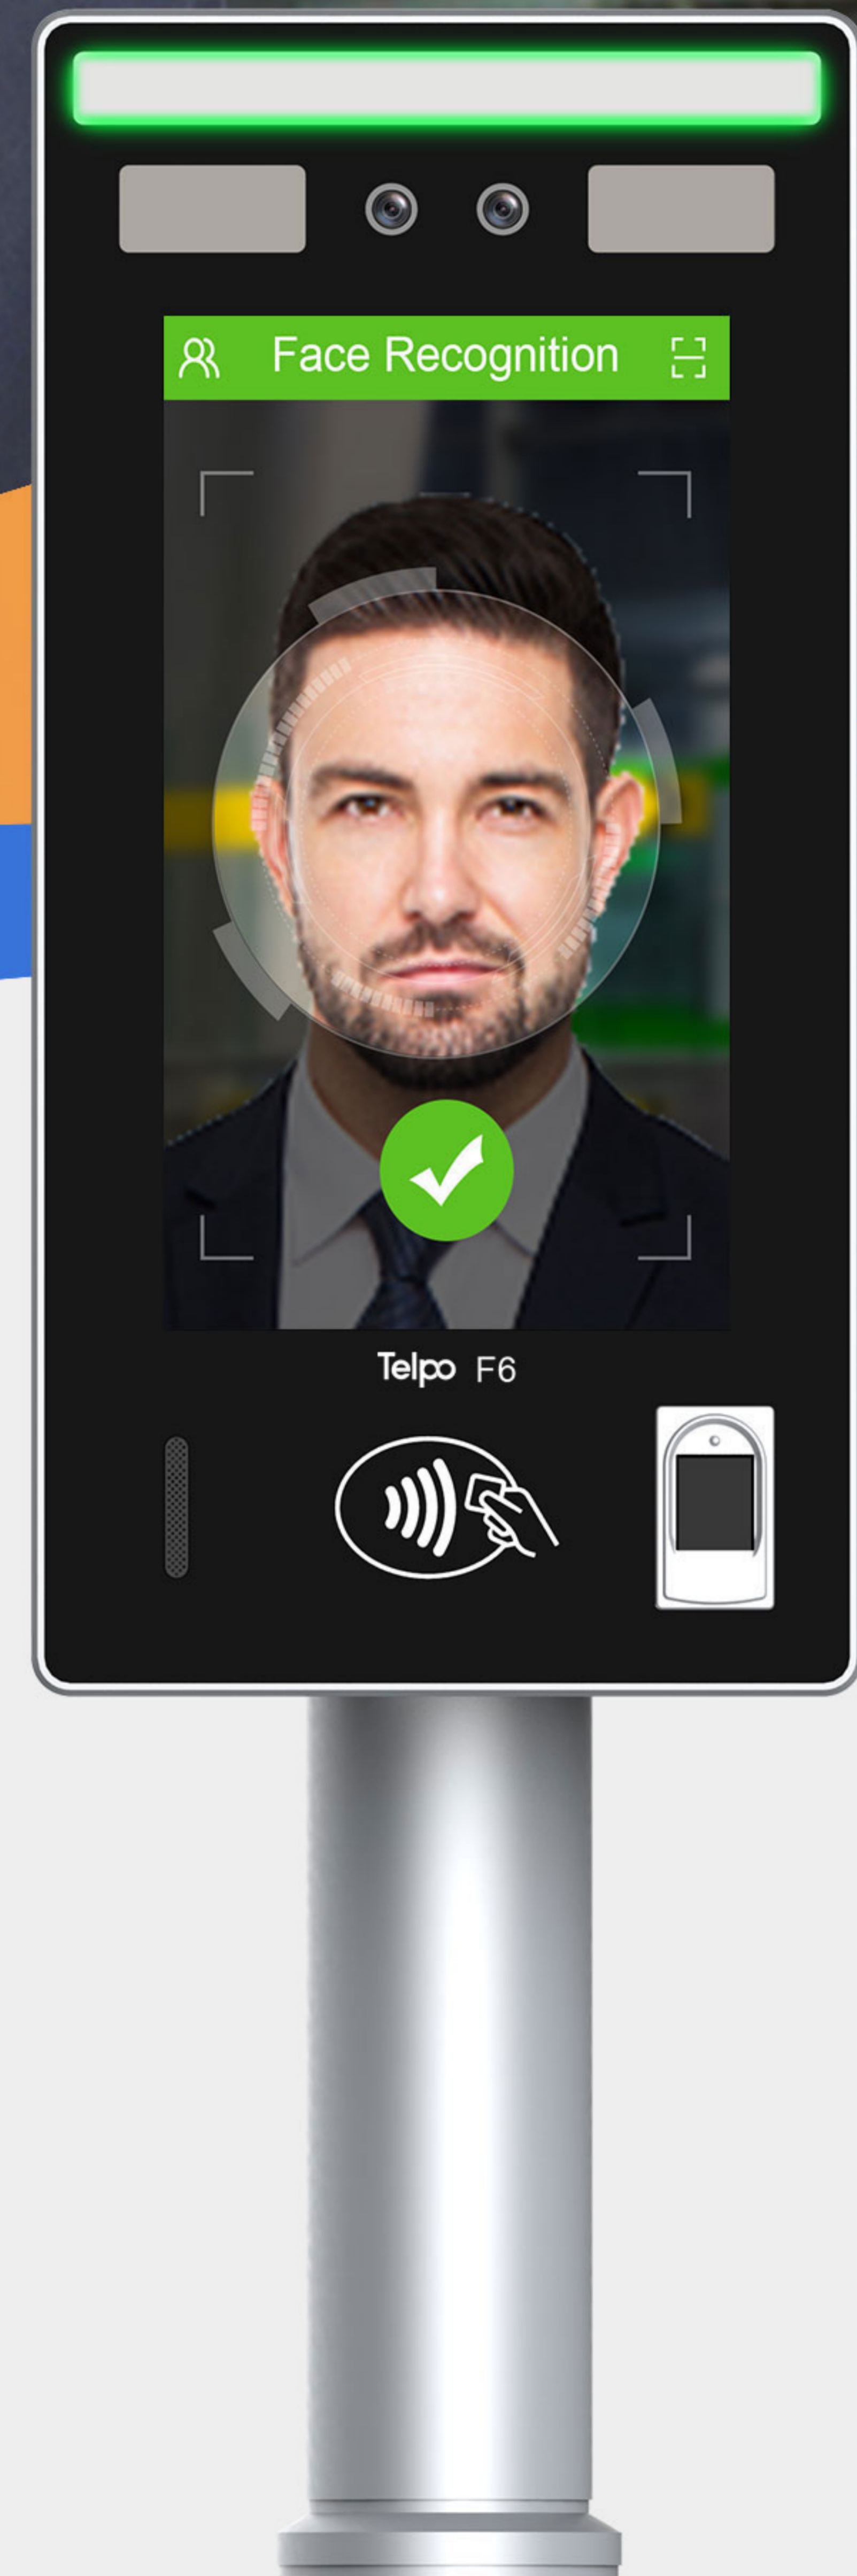


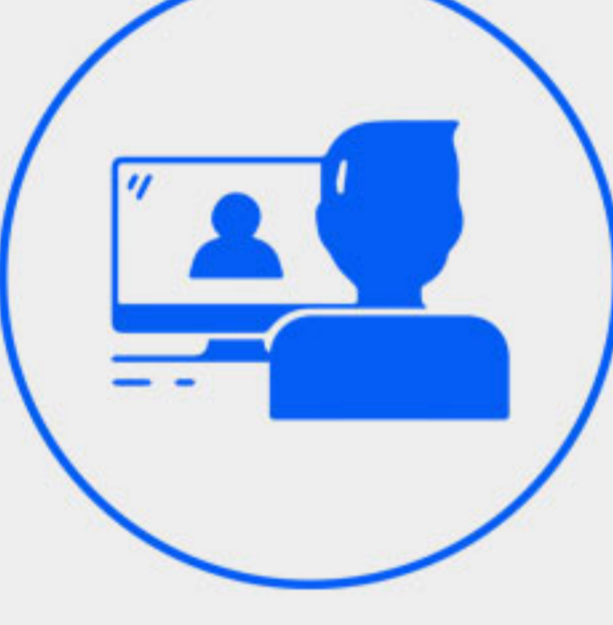



F6

IP66 Outdoor Face Recognition Terminal

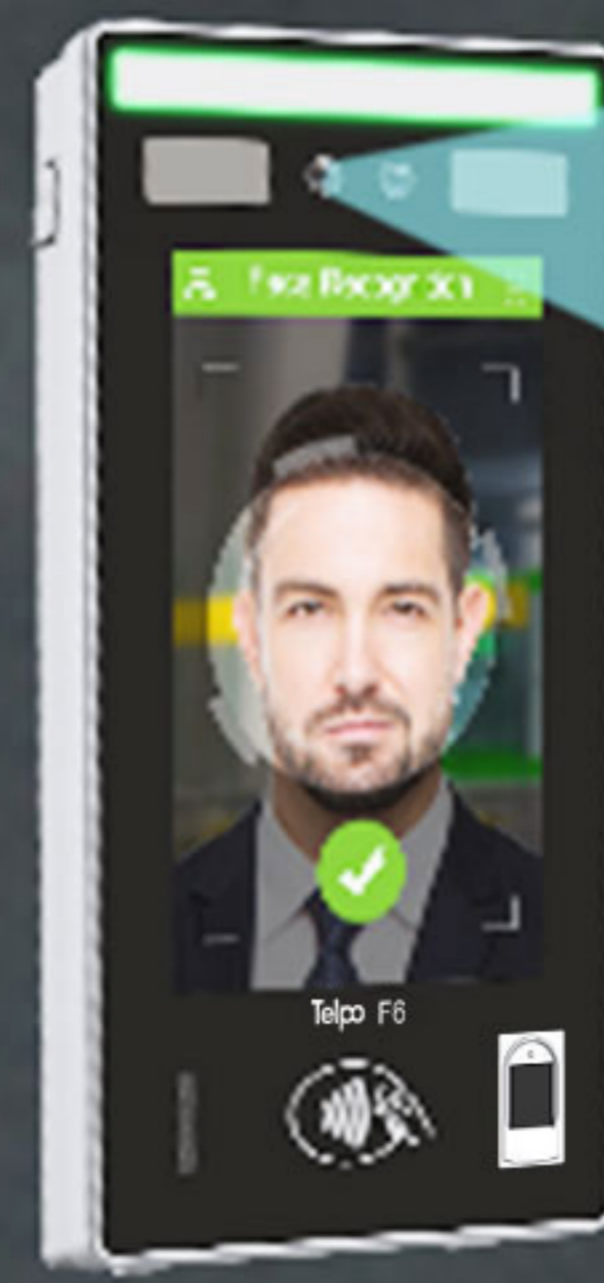

Features

- 
Face
- 
NFC
- 
Fingerprint
- 
IP66
- 
Tamper Protection
- 
Video Intercom
- 
Multi-language
- 
Telpo cloud

F6

IP66 Outdoor Face Recognition Terminal


Application



Specification

OS	Android 9.0 or above
Processor	Octa-Core 1.8GHz
Memory	2GB DDR, 16GB eMMC 1GB DDR, 8GB eMMC (Optional)
Display	7-inch, 600*1024
Keypad	1 Reset Key
Face Camera	Dual-lens Camera (RGB+IR), 2MP+2MP Single-lens Camera (RGB), 2MP (Optional)
Light	White/Red/Green LED
Communications	Ethernet/WiFi/Bluetooth
Contactless Card Reader (Optional)	ISO14443 Type A/B, Mifare, ISO18092 compliant
Fingerprint Scanner (Optional)	ANSI/INCITS 378, ISO/IEC 19794-2, ISO/IEC 19794-4
Audio	Digital Audio Speaker, Microphone
Peripheral Interface	1DCPort,1RJ45,1 Micro USB,1 Wiegand,1RS485,2Relay,2I/O
Tamper Protection	Support
Power Supply	12V/2A
Bracket	Wall Mount Bracket, Turnstile Mount Bracket
Environmental	Operating temperature: -20°C ~ 55°C Storage temperature: -25°C ~ 60°C
Ingress Protection	IP 65
MDM (Optional)	Mobile Device Management
Certification	CE, FCC, IP66

Note: Reserve the right to change the parameters without prior notice.

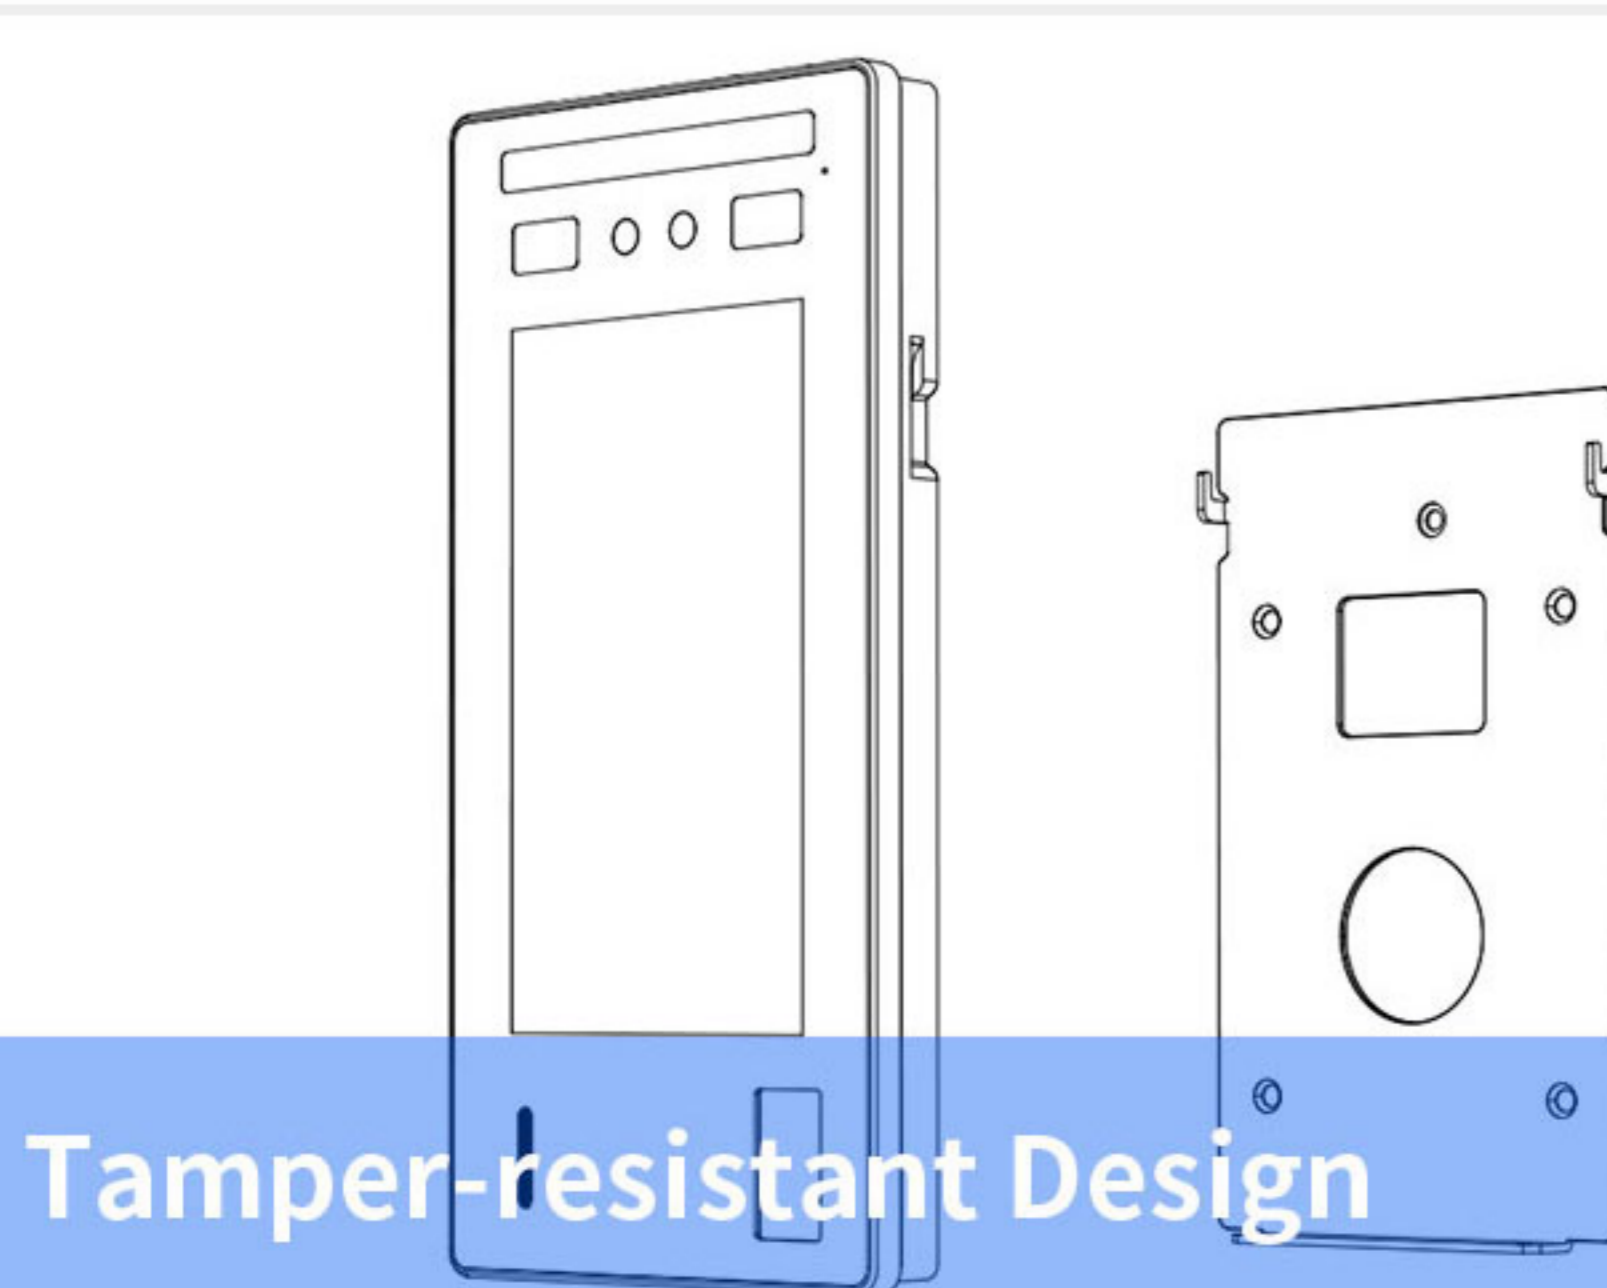

Tamper-resistant Design

Telepower communication Co.,Ltd.

www.telpo.com.cn
Tel:+86-757-86227898
E-mail:business@telpo.com
Add:Foshan City,Guangdong Province,China

