


Transverse drive ZR-40-80-Q

Housing height	40 mm
Housing width	80 mm
Belt width	50 mm

Centre distance	in consultation
Conveyor speeds / load	<p>5 - 30 m/min at max. 20 N or 4 - 24 m/min at max. 40 N or 1.5 - 10 m/min at max. 100 N</p> <p>Speed adjustable via analog signal 0-10 V: GND or 0 - 0.3 V Programmed, fixed value 0.5 - 0.9 V Motor stop 1 - 10 V Speed adjustable from min. up to max. up to 11 V Speed increase up to 110 % of rated speed with Vetter setpoint device</p>



Conveyor belts	timing belt, optionally with insert nuts (others on request)
Extensions	<ul style="list-style-type: none"> - sliding supports (e.g. lateral guides) - drive shaft stub - encoder-drive shaft - coupled conveyors (2-track) - setpoint device VR-24-SW-11 - setpoint device VSW-11 - part carriers
Supply voltage	24 V DC

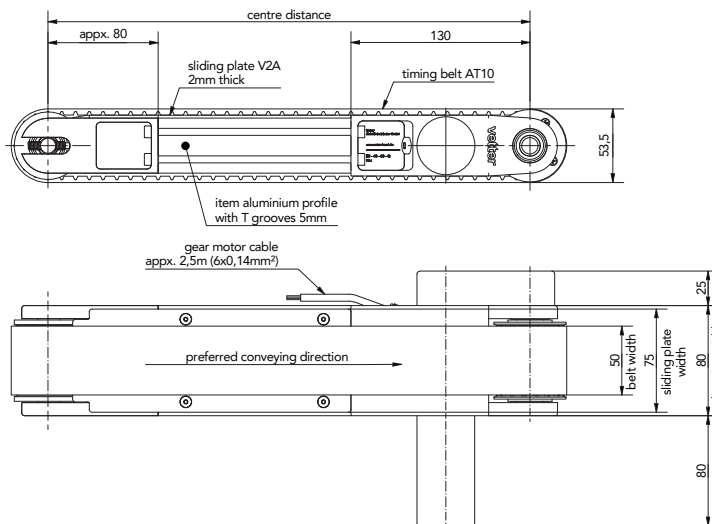

Option timing belt ATN10 with insert nuts

