


TAS-2520B

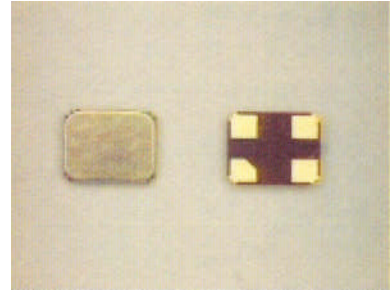

Features

- Small size ceramic package with high reliability using Au-Sn alloy for hermetic sealing
- Excellent shock and vibration performance, wide frequency range, high mechanical shock resistance
- Suitable for NFC, Bluetooth, WLAN and Cellular Phones
- Products are supplied on tape and reel, ROHS conform


Specifications

TAS-2520B	
Frequency	16 - 60 MHz
Load capacitance (CL)	5 pF - 20 pF, series
Frequency tolerance (@25°C)	± 10 ppm ... ± 50 ppm
Frequency stability	± 5 ppm ... ± 30 ppm
Operating temperature range	-35°C - +85°C
ESR	60 - 80 Ω max.
Dimension	2.5 x 2.0 x 0.45 mm

- Please consult us for customized specifications.

Dimension 2.5 x 2.0 x 0.45 mm

■ Outline

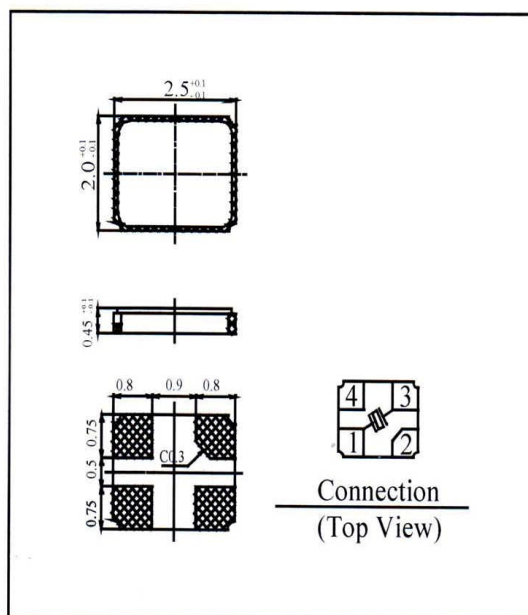

■ Reference Land Pattern

