




Excellence Series (PE) 40mmx40mmx28mm




- Bearing Type : Ball Bearing
- Function Type (Optional) : FG Signal, RD Signal, PWM
- Protection :
Auto Restart Protection, Polarity Reverse Protection
- Lead Wire :
UL 1061 AWG #26 OR Equivalent
Red Wire : Positive (+)
Black Wire : Negative (-)
Yellow Wire : FG Signal, RD Signal
Blue Wire : PWM



★ Dimensions Drawing

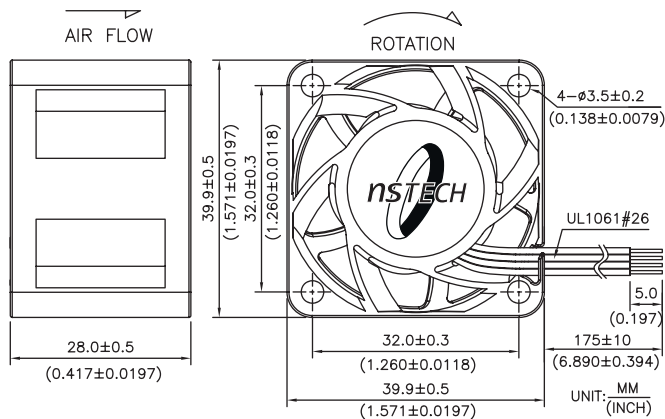

★ Performance Curves

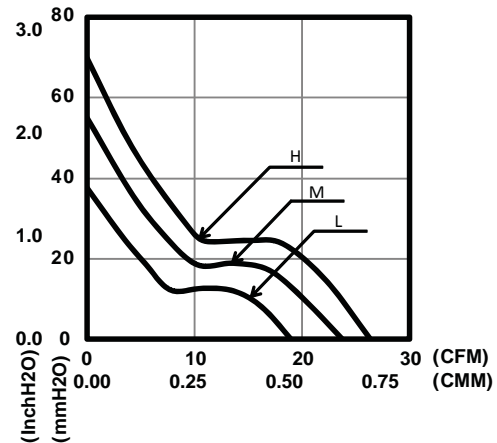

Specification												
Model	Function Type	Rated Voltage	Operating Voltage	Rated Current*	Input Current	Input Power	Rated Speed	Max. Air Flow		Max. Air Pressure		Noise
		VDC	VDC	Amp	Amp	Watt	RPM	CMM	CFM	mmH ₂ O	InH ₂ O	
PEAD14032BL	P000/PF00	12	6~13.8	0.58	0.46	5.52	14600	0.54	19.0	37.5	1.48	52.5
PEAD14032BM	PR00/M000	12	6~13.8	0.81	0.65	7.80	17600	0.67	23.8	55.0	2.16	56.5
PEAD14032BH	MF00/MR00	12	6~13.8	1.02	0.81	9.72	20000	0.75	26.4	69.9	2.75	59.5

- * Function type is optional
- * The data shows typical value at rated voltage
- * Sound level is measured at the distance of one meter from fan intake side
- * Specifications are subject to change without notice