
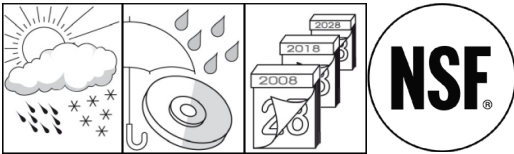


## OKS 3600

### Adhesive Oil and High-Performance Corrosion Protection for Food Processing Technology



#### Description

Highly adhesive lubricating oil with good creep properties. Anti-corrosion agent on an oil basis as long-term protection for the storage and transportation of bare surfaces and machine components. Certified for applications in food processing technology.

#### Applications

- Highly adhesive lubrication of moving parts, e.g. valve spindles, piston rods, wire cables, drag cables, drive and conveyor chains, hinges and guides, at highly corrosive conditions in food processing technology
- Temporary corrosion protection of ferrous and non-ferrous metals, in particular in highly corrosive atmospheres, such as industrial atmospheres, outdoor weathering under roofs of semi-finished products and finished products
- Shipping protection of packed and unpacked machines and machine parts, apparatuses and equipment goods under extreme climatic conditions

#### Advantages and benefits

- Highly adhesive oil with very good creep and lubrication properties
- Optimal corrosion protection through high effectiveness of the corrosion protection additive
- After the solvent has dried, forms a transparent, highly adhesive oil film
- Contains non-ferrous metal deactivator
- NSF H1-registered
- Also available as spray version OKS 3601

#### Branches

- Catering equipment and food processing technology
- Plant and machine (tool) engineering
- Rubber and plastic processing
- Municipal services
- Paper and packaging industry
- Chemical industry
- Shipbuilding and marine technology
- Logistics
- Iron and steel industry
- Glass and foundry industry
- Rail vehicle technology

#### Application tips

For best adhesion, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Apply a sufficient quantity of OKS 3600/OKS 3601 to the areas to be protected. Apply several times depending on the operating conditions and storage duration. Let soak in/dry before packing. Observe the machine manufacturer's instructions. Only mix with suitable lubricants.

# OKS 3600

## Adhesive Oil and High-Performance Corrosion Protection for Food Processing Technology

### Packaging

- 5 l Canister
- 25 l Canister

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyalphaolefine
<b>Application related technical data</b>				
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	1,700
viscosity at (40°C)	DIN 51 562-1	with solvent	mm <sup>2</sup> /s	>21.5
flashing point	DIN EN ISO 13736		°C	> 67
lower operating temperature			°C	-40
upper operating temperature			°C	80
colour				yellow-brown
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.81
salt spray test	DIN EN ISO 9227	brush application	h	> 100
salt spray test	DIN EN ISO 9227	spray application (max.)	h	> 300
<b>Properties and approvals</b>				
approval for food processing technology				NSF H1, Reg.-Nr. 153877

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.