

# Inclinometers

<b>Inclinometer MEMS / capacitive</b>	<b>IS40, 1-dimensional</b>	<b>Analog</b>
---	----------------------------	---------------



With the IS40 inclinometer 1-dimensional inclinations in the measuring range 0 - 360° can be measured.  
The compact robust construction makes this sensor the ideal device for measuring angles in harsh environments.



Output



High protection level



Shock / vibration resistant



Reverse polarity protection

## Innovative

- Rugged construction – high shock resistance.
- High resolution and accuracy.
- Current or voltage interface.
- Adjusting of the measuring range via teach adapter.

## Compact / Many applications

- Small design – minimal space requirement.
- For use in vehicle technology, solar installations, cranes and hoists or in commercial vehicles.

## Order code Inclinometer IS40

**8.IS40** . **14X21**  
Type      a b c d e

**a** Measuring direction  
1 = 1-dimensional

**b** Measuring range  
4 = 0 ... 360°

**c** Interface  
1 = 4 ... 20 mA  
3 = 0.1 ... 4.9 V DC

**d** Power supply  
2 = 10 ... 30 V DC

**e** Type of connection  
1 = M12 connector


## Accessories

		Order no.
<b>Teach adapter</b>	for inductive encoders, linear position, angle and ultrasonic sensors	<b>05.TX40.1</b>
<b>Cables and connectors</b>		Order no.
<b>Preassembled cables</b>	M12 female connector with coupling nut, 5-pin, straight 2 m [6.56'] PVC cable	<b>05.00.6081.2211.002M</b>
<b>Connectors</b>	M12 female connector with coupling nut, 5-pin, straight	<b>8.0000.5116.0000</b>

Further Kübler accessories can be found at: [kuebler.com/accessories](http://kuebler.com/accessories)

Further Kübler cables and connectors can be found at: [kuebler.com/connection-technology](http://kuebler.com/connection-technology)

## Direction of inclination



## Adjusting the measuring range via 05.TX40.1 teach adapter

- Setting the angular range in CW direction:
  - Move sensor to start position
  - Press and hold Teach-GND until the output is set to < 4 mA / 0.1 V (approx. 1 s)
  - Move sensor to end position
  - Press and hold Teach-GND until the output is set to 20 mA / 4.9 V (approx. 3 s)
- Resetting the angular range:
  - Press and hold Teach-GND until the output is set to 12 mA (approx. 6 s)
  - The angular range is reset to 360°



# Inclinometers

<b>Inclinometer MEMS / capacitive</b>	<b>IS40, 1-dimensional</b>	<b>Analog</b>
---	----------------------------	---------------

## Technical data


Mechanical characteristics	
Connection	M12 connector
Weight	50 g [1.76 oz]
Protection acc. to EN 60529	IP68 / IP69k
Working temperature range	-30 °C ... +70 °C [-22 °F ... +158 °F]
Material	plastic PBT-GF20-V0
Shock resistance	300 m/s <sup>2</sup> , 11 ms
Vibration resistance	100 m/s <sup>2</sup> , 10 ... 2000 Hz
Dimensions	60 x 30 x 20 mm [2.36 x 1.18 x 0.79"]

Electrical characteristics	
Power supply	10 ... 30 V DC
Power consumption	50 ... 105 mA (depending on voltage)
Reverse polarity protection	yes
Measuring axes	1
Measuring range	0 ... 360°
Resolution	≤ 0.14°
Repeat accuracy	≤ 0.2 % of measuring range ≤ 0.1 % after a warm-up period of 30 min
Temperature drift	0.03°/K
Reaction time	0.1 s – Time that the output signal requires to reach 90 % full scale

Interface characteristics	
Voltage output	0.1 ... 4.9 V DC short-circuit protected to +V
Load resistance voltage output	≥ 40 kΩ
Output impedance voltage output	99 ... 105 Ω
Current output	4 ... 20 mA
Load resistance current output	≤ 200 Ω


Approvals	
CE compliant in accordance with	EMC Directive 2014/30/EU

## Connections

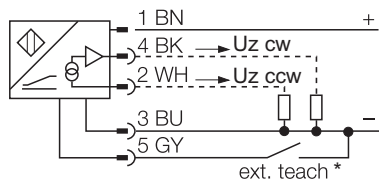

\*) Teach adapter, accessory (Order no. 05.TX40.1)

## Terminal assignment



# Inclinometers

<b>Inclinometer</b> <b>MEMS / capacitive</b>	<b>IS40, 1-dimensional</b>	<b>Analog</b>
---	----------------------------	---------------

## Dimensions

Dimensions in mm [inch]

