Absolute encoders – multiturn



Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

EtherCAT



The multiturn encoders Sendix 5868 and 5888 with secondgeneration EtherCAT interface and optical sensor technology are ideal for use in all applications with an EtherCAT interface.

The data communication is based on CAN over EtherNet and ideally suited for use in real time applications.

These encoders are available with a solid shaft up to a maximum of 10 mm or a blind hollow shaft up to 15 mm.





























High rotational

Temperature

capacity

Shock / vibration resistant

Magnetic field proof

Reverse polarity Optical sensor protection

Surface protection salt spray-tested optional

Reliable

- · EtherCAT conformance tested.
- Integration of the latest slave EtherCAT stack from Beckhoff, Version 5.01.
- Ideally suited for use in harsh outdoor environments, thanks to IP67 protection and rugged housing construction.

Flexible

- · Use of CoE (CAN over EtherNet).
- Genuine new position information as a result of minimal cycle time of 62.5 µs in the DC mode.
- Faster, easier error-free connection thanks to M12 connectors.
- · Supports Hot Connect.

Order code **Shaft version**

a Flange 1 = clamping flange, IP65 ø 58 mm [2.28"]

3 = clamping flange, IP67 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"]

4 = synchro flange, IP67 ø 58 mm [2.28"]

5 =square flange, IP65 \square 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"]

8.5868 XXB2 B2 12 0000 Туре **e**

> **b** Shaft (ø x L), with flat $1 = 6 \times 10 \text{ mm} [0.24 \times 0.39"]^{1}$ 2 = 10 x 20 mm [0.39 x 0.79"] 2)

3 = 1/4" x 7/8"

4 = 3/8" x 7/8"

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days



Interface / power supply

B = EtherCAT / 10 ... 30 V DC

Type of connection removable bus terminal cover

2 = 3 x M12 connector, 4-pin

e Fieldbus profile

B2= EtherCAT with CoE (CAN over EtherNet)

Optional on request

- Ex 2/22

- surface protection salt spray tested

Order code **Hollow** shaft

8.5888 Type



B2 **B**

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days



a Flange

1 = with spring element, long, IP65

2 = with spring element, long, IP67

3 = with stator coupling, IP65 \emptyset 65 mm [2.56"]

4 = with stator coupling, IP67 ø 65 mm [2.56"]

5 = with stator coupling, IP65 ø 63 mm [2.48"] 6 =with stator coupling, IP67 ø 63 mm [2.48"] Blind hollow shaft (insertion depth max. 30 mm [1.18"])

3 = Ø 10 mm [0.39"] $4 = \emptyset 12 \text{ mm } [0.47"]$

 $5 = \emptyset 14 \text{ mm } [0.55"]$

 $8 = \emptyset 3/8"$ $9 = \emptyset 1/2$ "

 $6 = \emptyset 15 \text{ mm} [0.59"]$

Interface / power supply B = EtherCAT / 10 ... 30 V DC

Type of connection

removable bus terminal cover 2 = 3 x M12 connector, 4-pin

Fieldbus profile

B2= EtherCAT with CoE (CAN over EtherNet)

Optional on request

- Ex 2/22

- surface protection salt spray tested

¹⁾ Preferred type only in conjunction with flange type 2.

²⁾ Preferred type only in conjunction with flange type 1.



Absolute encoders – multiturn

Standard		
mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	EtherCAT

mechanicai munnum, o	Seliuix 2000 / 2000 (Slidit / Hollow Slid	ait) Etile	IGAI
Mounting accessory for shaft	encoders		Order no.
Coupling	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"]		8.0000.1102.0606
	bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]		8.0000.1102.1010
Mounting accessory for hollo	w shaft encoders Dimensions in mm [inch]		Order no.
Torque pin, ø 4 mm	with fixing thread		8.0010.4700.0000
for flange with spring element (flange type 1 + 2)	8[0.31] 5[0.2] SW7 [0.28] 9 0 30[1.18]		
Cables and connectors			Order no.
Preassembled cables	M12 male connector with external thread, 4-pin, D coded, straight single-ended 2 m [6.56'] PUR cable	Bus IN + Bus OUT	05.00.6031.4411.002M
	M12 female connector with coupling nut, 4-pin, A coded, straight single-ended 2 m [6.56'] PUR cable	supply voltage	05.00.6061.6211.002M
Connectors	M12 male connector with external thread, 4-pin, D coded, straight (metal)	Bus IN + Bus OUT	05.WASCSY4S
	M12 female connector with coupling nut, 4-pin, A coded, straight (plastic)	supply voltage	05.B8141-0

Further Kübler accessories can be found at: kuebler.com/accessories
Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

Technical data

Mechanica	l characteristics	
Maximum speed	IP65 up to 70 °C [158 °F] IP65 up to T _{max} IP67 up to 70 °C [158 °F] IP67 up to T _{max}	7000 min ⁻¹ , 4000 min ⁻¹ (continuous) 8000 min ⁻¹ , 6000 min ⁻¹ (continuous)
Starting torqu	re - at 20 °C [68 °F] IP65 IP67	
Mass momen	t of inertia	
	shaft version hollow shaft version	
Load capacity	y of shaft radial axial	**
Weight		approx. 0.54 kg [19.05 oz]
Protection ac	c. to EN 60529	
	housing side	IP67
	shaft side	IP65, opt. IP67
Working temp	perature range	-40 °C +80 °C [-40 °F +176 °F]
Material	shaft/hollow shaft flange housing	aluminum
Shock resista	nce acc. to EN 60068-2-27	2500 m/s ² , 6 ms
Vibration resis	stance acc. to EN 60068-2-6	100 m/s², 55 2000 Hz

Electrical characteristics	
Power supply	10 30 V DC
Power consumption (no load)	max. 120 mA
Reverse polarity protection of the power supply	yes

Interface characteristics EtherCAT				
Resolution singleturn (MUR)				
	scalable	1 65 536 (16 bit)		
	default	8 192 (13 bit)		
Number of revolutions (NDR) 1 4 096 (12 bit)				
		scalable only via the total resolution		
Total resolution (TMR)				
	scalable	1 268 435 456 (28 bit)		
	default	33 554 432 (25 bit)		
Protocol		EtherNet / EtherCAT		

Approvals	
UL compliant in accordance with	File no. E224618
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU
ATEX Directive	2014/34/EU (for Ex 2/22 variants)
UKCA compliant in accordance with	
EMC Regulations	S.I. 2016/1091
RoHS Regulations	S.I. 2012/3032
UKEX Regulations	S.I. 2016/1107 (for Ex 2/22 variants)



Absolute encoders – multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

EtherCAT

Diagnostic LED (red)

LED is ON with the following fault conditions:

Sensor error (internal code or LED error), low voltage, over-temperature

Run LED (green)

LED is ON with the following conditions:

Preop-, Safeop and Op-State (EtherCAT status machine)

2 x Link LEDs (yellow)

LED is ON with the following conditions (port IN and port OUT): Link detected

Modes

Freerun, distributed clock

General information about CoE (CAN over EtherNet)

The EtherCAT encoders support the CANopen communication profile according to DS301. In addition device-specific profiles like the encoder profile DS406 are available.

Scaling, preset values, limit switch values and many other parameters can be programmed via the EtherCAT bus.

When switching the device on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure.

The following output values may be combined as PDO (PDO mapping): **position**, **speed**, **temperature values** and **working area state** as well as other process values.


CANopen encoder profile 3.2.10 CoE (CAN over EtherNet)

The following parameters are programmable:

- Position update time of 62.5 μs.
- · EtherCAT certificate of conformity.
- Speed with sign.
- Four units for speed calculation: steps/sec, steps/100 ms, steps/10 ms, min-1.
- Time stamp as system time at the point in time when the position is read out.
- · Two working area state registers.
- Along with the scaled position, the raw data position as process value is also mappable.
- Dynamic mapping.
- Gating time: setting of the time interval, via which the speed value can be interpolated.
- Sensor temperature in degrees Celsius.
- Comprehensive plausibility test when downloading parameters to the encoder.
- Alarm and warning messages.
- User interface with visual display of bus and fault status 4 LEDs.
- Extended error management for position sensing with integrated temperature control.
- Implementation of the latest CANopen profile 3.2.10 from the 18th February 2011.
- Hot-Connect Support for rapid change of Bus-topology.

Terminal assignment bus

Interface	Type of connection	Function	M12 connecto	M12 connector, 4-pin					
		Bus Port IN	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -	√ 2	
			Abbreviation:	TxD+	RxD+	TxD-	RxD-	① ③	D coded
			Pin:	1	2	3	4	(a)	
	2	Power	Signal:	Voltage +	-	Voltage –	-	2	
В	(3 x M12 connector)	supply	Abbreviation:	+ V	П	0 V	-	(\circ)	
			Pin:	1	2	3	4		
		Bus Port OUT	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -	√ 2 .	
			Abbreviation:	TxD+	RxD+	TxD-	RxD-	(0 3)	D coded
			Pin:	1	2	3	4	4	





Absolute encoders - multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

EtherCAT


Dimensions shaft version, with removable bus terminal cover


Dimensions in mm [inch]

Clamping flange, ø 58 [2.28] Flange type 1 and 3

1 3 x M3, 6.0 [0.24] deep

2 3 x M4, 8.0 [0.31] deep

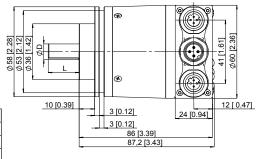





Fit	L
h7	10 [0.39]
f7	20 [0.79]
h7	7/8"
h7	7/8"
	f7 h7

Synchro flange, ø 58 [2.28] Flange type 2 and 4

1 3 x M4, 6.0 [0.24] deep





U	FIL	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Fit

h7

f7

h7

h7

Square flange, \square 63.5 [2.5] Flange type 5 and 7


D


6 [0.24]


10 [0.39]

1/4"

3/8"









Absolute encoders - multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

EtherCAT


Dimensions hollow shaft version (blind hollow shaft), with removable bus terminal cover

Dimensions in mm [inch]

Flange with spring element, long Flange type 1 and 2

- 1 Slot spring element recommendation: torque pin DIN 7, ø 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the clamping ring 0.6 Nm


D	Fit	L	
10 [0.39]	H7	30 [1.18]	
12 [0.47]	H7	30 [1.18]	
14 [0.55]	H7	30 [1.18]	
15 [0.59]	H7	30 [1.18]	
3/8"	H7	30 [1.18]	
1/2"	H7	30 [1.18]	
L = insertion depth max, blind hollow shaft			

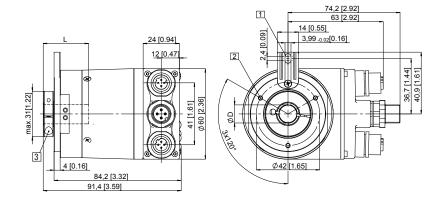


Flange with stator coupling, ø 63 [2.48] Flange type 5 and 6

1 Recommended torque for the clamping ring 0.6 Nm


D	Fit	L	
10 [0.39]	H7	30 [1.18]	
12 [0.47]	H7	30 [1.18]	
14 [0.55]	H7	30 [1.18]	
15 [0.59]	H7	30 [1.18]	
3/8"	H7	30 [1.18]	
1/2"	H7	30 [1.18]	
L = insertion depth max. blind hollow shaft			






Flange with stator coupling, ø 65 [2.56] Flange type 3 and 4

1 Recommended torque for the clamping ring 0.6 Nm





D	Fit	L	
10 [0.39]	H7	30 [1.18]	
12 [0.47]	H7	30 [1.18]	
14 [0.55]	H7	30 [1.18]	
15 [0.59]	H7	30 [1.18]	
3/8"	H7	30 [1.18]	
1/2"	H7	30 [1.18]	
L = insertion depth max. blind hollow shaft			