








# 佛山凯力照明科技有限公司

Foshan Kaili Lighting Technology Co., Ltd



## T5 Universal LED Tube



WDGT5001



WDGT5002

LED Universal Tube can be used to replace the Fluorescent tube without removing Electronic ballast for home installation without electrician certificate, which is compatible to more than 90% electronic ballast. 28W fluorescent tube can be replaced by 18W Universal LED tube with similar lumens, saving approximate 3 months' electricity bill to offset replacement cost. LED Tube has longer lifespan and safer usage.

### Technical Specifications of T5 Tube:

- Lamp source: LED source
- Main Voltage/Frequency: AC110-240V/50-60Hz
- LED Source Power: 9W; 18W
- Material: PC
- Length: 0.6m, 1.2m
- Function: Replacing 14W/28W Fluorescent tube without removing Electronic ballast
- Compatible Range: Beyond 90% Electronic ballast no need to remove from Fluorescent tube bracket



9W



18W



## Specifications:

Code	WDGT5001	WDGT5002
Name	9W UNIVERSAL LED TUBE	18W UNIVERSAL LED TUBE
Diameter	T5 (16mm)	
Height / Length	60cm	120cm
Material	PC	
Main Voltage/Frequency	AC110-240V/50-60Hz	
Source Power	9W	18W
Color Temperature	4000K/6500K	
Power Factor	0.5	
Surface Temperature	40° C	
Operating Temperature	-20°C-55°C	
Luminous Flux	900lm	1800lm
Luminous Efficacy	≧ 80lm/w	
CRI	≧ 80Ra	
Base Type	G13	
Lifespan	35,000 hours	
Guarantee Period	1 year	
Function	14W fluorescent tube replacing	28W fluorescent tube replacing
Compatible Range	Beyond 90% Electronic ballast	

**\*Special development and customer's solutions on request. Luminous Flux can be increased according to your requirement.**

## T8 Universal LED Tube



WDGT8001



WDGT8002


### Technical Specifications of T8 Tube:

- Lamp source: LED source
- Main Voltage/Frequency: AC110-240V/50-60Hz
- LED Source Power: 9W; 18W
- Material: PC
- Length: 0.6m, 1.2m
- Function: Replacing 14W/28W Fluorescent tube without removing Electronic ballast  
Compatible Range: Beyond 90% Electronic ballast no need to remove from Fluorescent tube bracket

### 9W T8 Tube



### 18W T8 Tube

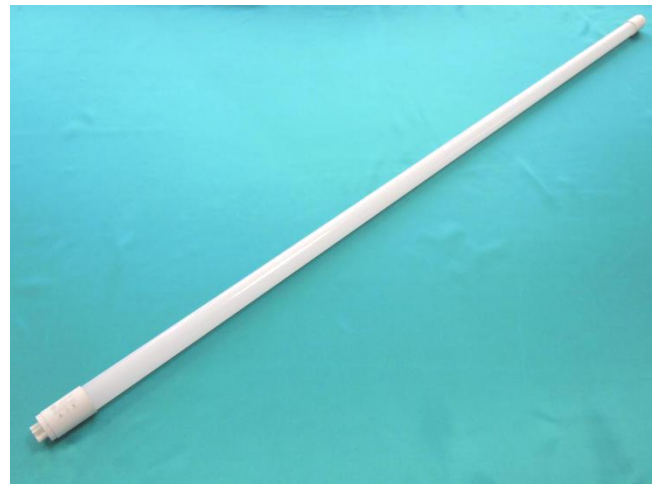

## Specifications:

Code	WDGT8001	WDGT8002
Name	9W UNIVERSAL LED TUBE	18W UNIVERSAL LED TUBE
Diameter	T8 (26mm)	
Height / Length	60cm	120cm
Material	PC	
Main Voltage/Frequency	AC110-240V/50-60Hz	
Source Power	9W	18W
Color Temperature	4000K/6500K	
Power Factor	0.5	
Surface Temperature	40° C	
Operating Temperature	-20°C-55°C	
Luminous Flux	900lm	1800lm
Luminous Efficacy	≧ 80lm/w	
CRI	≧ 80Ra	
Base Type	G13	
Lifespan	35,000 hours	
Guarantee Period	1 year	
Function	18W fluorescent tube replacing	36W/40W fluorescent tube replacing
Compatible Range	Beyond 90% Electronic ballast	

**\*Special development and customer's solutions on request. Luminous Flux can be increased according to your requirement.**